


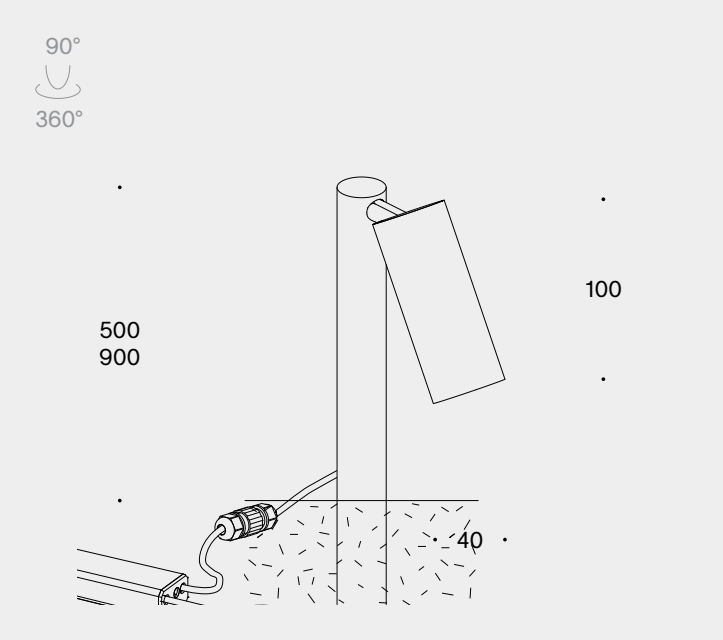

acrobat outdoor | pin down 230V

installation

light specs

lamp	LED	
optic	glass lens	
driver (incl.)	230V non-dimmable 350mA	
	230V DALI dimmable 350mA	
voltage	230V	
IP	IP65	
CRI	90+	
SDCM	SDCM2	
class	class III	
height variations	50H	90H
pole / anchor pole	Ø26 mm	150 mm
tilt	90°	
location	outdoor	
comes with	2m H07 cable	
marking	CE	

luminaire output

	40°	
	2700K	3000K
350mA (5.7W)	525lm	550lm

© Prado Europe bv We reserve the right, without notice, to change technical details if these, in our opinion do not change appearance or function of the product.