


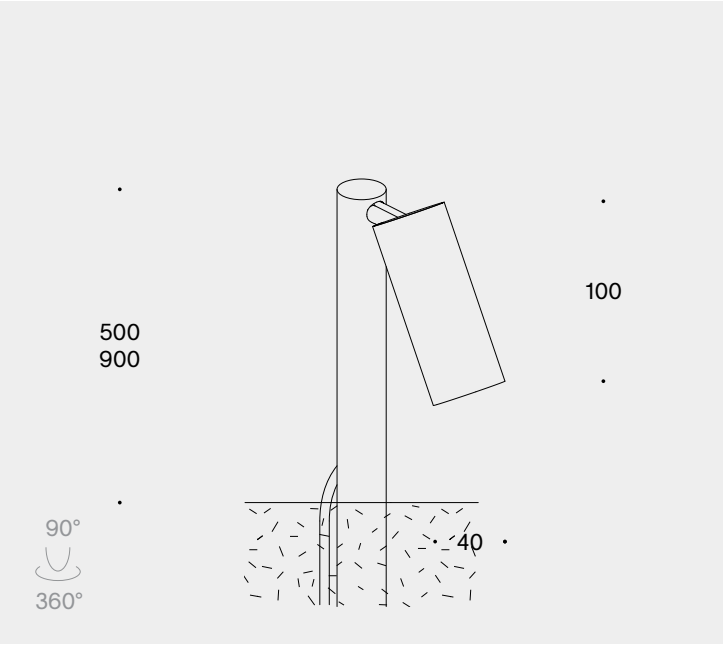

acrobat outdoor | pin down

installation

light specs

lamp	LED	
optic	glass lens	
driver	excluded	
IP	IP65	
CRI	90+	
SDCM	SDCM2	
class	class III	
height variations	50H	90H
pole / anchor pole	Ø26 mm	150 mm
tilt	90°	
location	outdoor	
comes with	2m H07 cable	
marking	CE	

accessories

	drivers - cv
IP68 24V constant voltage dali pwm driver 60W	8000-0040
IP68 24V constant voltage dali pwm driver 120W	8000-0041
IP68 24V constant voltage dali pwm push driver 200W	8000-0042
	drivers - cc
IP68 non dimmable driver 42W constant current 500mA	8000-0038
IP68 dali dimmable driver 38W constant current 500mA	8000-0039
DALI dimmable driver 38W	8000-0021
0-10V dimmable driver 36W	8000-0022
non-dimmable driver 42W	8000-0023
DALI dimmable driver 60W	8000-0026

luminaire output

	40°	
	2700K	3000K
350mA (5.7W)	525lm	550lm

© Prado Europe bv

We reserve the right, without notice, to change technical details if these, in our opinion do not change appearance or function of the product.