flush-mount countersink guide
for unifit duplex outlet | rounded

Achieve a seamless, minimalist finish by flush mounting your unifit duplex outlet. Follow the steps below for optimal results.

step-by-step instructions

1. Drill the main hole

- Use a 1-7/32" (30.8 mm) forstner or hole saw bit to drill two holes with a center distance of 1-9/16″ (39.6 mm)
- Ensure clean, accurate alignment

2. Create the countersink (optional)

- Make a circular recess:
  - 1/16" (1.5 mm) around the entire hole
  - 1/10" (2.5 mm) deep

tool recommendations

- **Wood, veneer:**


  Hole: 1-7/32" (30.8 mm) forstner bit or hole saw

  Countersink: 1/16" rabbeting router bit ↗

- **Wood, veneer & hard materials (stone, tile, metal, glass):**

  Hole: CNC machine / waterjet / laser.

  Countersink: CNC machine only

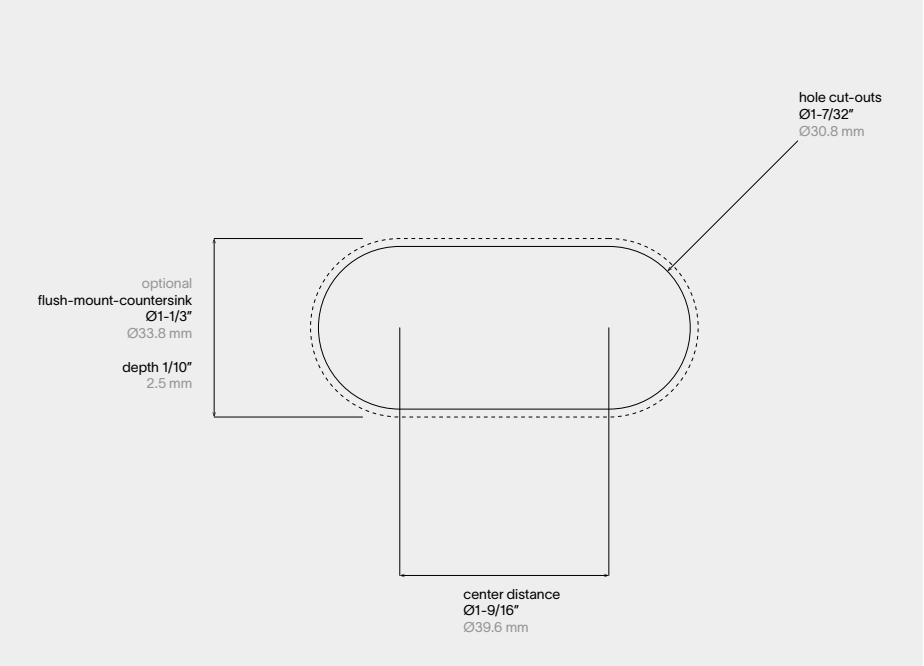

* Prado America LLC is not liable for incorrect hole drilling. Installation must be carried out by a qualified professional. We recommend testing the process on a sample material before final installation.

© prado America LLC

We reserve the right, without notice, to change technical details if these, in our opinion do not change appearance or function of the product.

flush-mount countersink guide
for unifit duplex outlet | square

Achieve a seamless, minimalist finish by flush mounting your unifit duplex outlet. Follow the steps below for optimal results.

step-by-step instructions

1. Drill the main hole

- Use a 1-7/32" (30.8 mm) forstner or hole saw bit to drill two holes with a center distance of 1-9/16″ (39.6 mm)
- Ensure clean, accurate alignment


2. Create the countersink (optional)

- Make a square recess:
    - 1/10" (2.5 mm) deep

tool recommendations

- **Wood, veneer & hard materials (stone, tile, metal, glass):**

Hole:	CNC machine / waterjet / laser.
Countersink:	CNC machine only

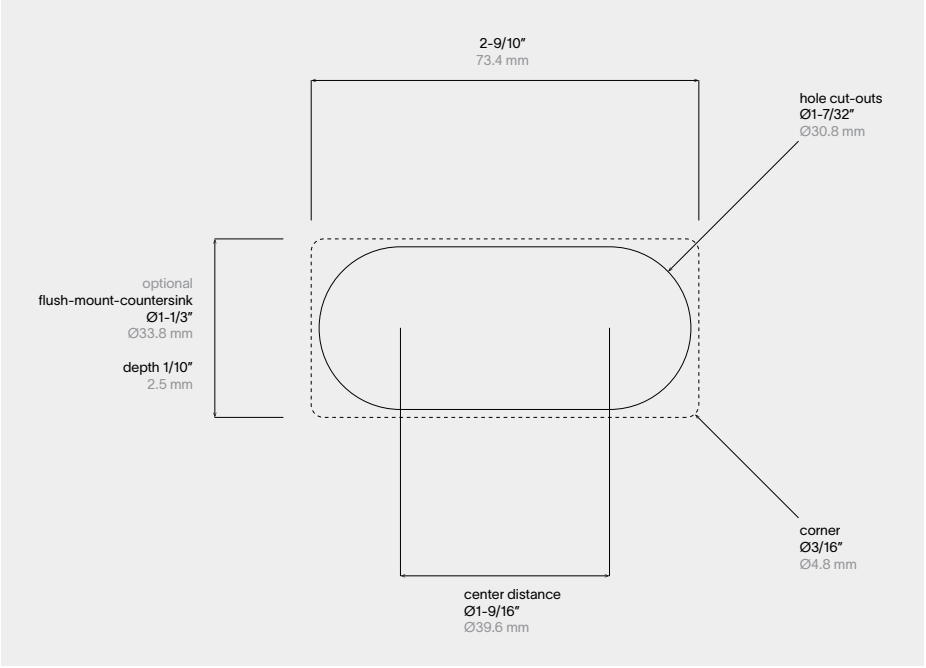

* Prado America LLC is not liable for incorrect hole drilling. Installation must be carried out by a qualified professional. We recommend testing the process on a sample material before final installation.

© prado America LLC
We reserve the right, without notice, to change technical details if these, in our opinion do not change appearance or function of the product.