acrotrack mini | long

We aim to create cleaner ceilings.
Show what you want, hide what you need.





© Prado America LLC

We reserve the right, without notice, to change technical details if these, in our opinion do not change appearance or function of the product.

luminaire specs 3

configure yours 4

finishes 5

luminaire output 6


accessories 8

acrotrack overview 9

© Prado America LLC

We reserve the right, without notice, to change technical details if these, in our opinion do not change appearance or function of the product.



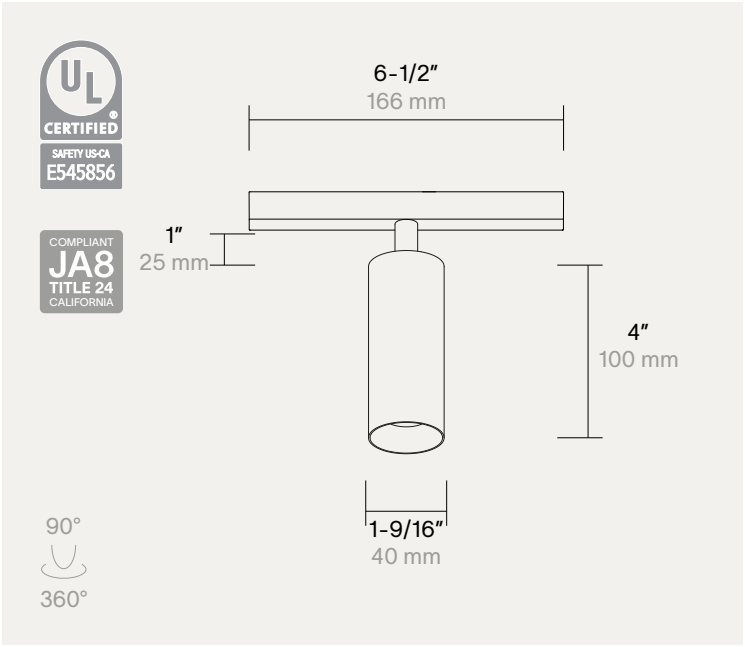

acrotrack mini | long

installation

luminaire specs

delivered lumen	up to 925lm		
watts	up to 13W		
efficacy	91lm/W		
CRI	90+	97	
R9 value	CRI 90+: >50	CRI 97: >91	
CBCP	10° pc: 6731cd	20° pc: 6280cd	
	40° pc: 1969cd	60° pc: 845cd	
	40° glass: 1852cd		
color temperature (CCT)	2700K	3000K	3500K
	dim to warm: 3000K > 1800K		
color consistency	2-step SDCM		
driver input voltage	120V		
dimming	DALI/0-10V		
power supply	driver included		
optics	10° / 20° / 40° / 60°		
adjustability	rotation 360°	tilt 90°	
suitable for	dry locations (IP20)		
panel thickness	no panel thickness limitations		
L80	>55000 h		

installation acc. (not incl.)	acrotrack overview ↗	
material	aluminum	brass
aluminum finishes	black ano	white struc
	brushed steel	brushed grey
	brushed bronze	
aluminum weight	0.91 lb (0.41 kg)	
brass finishes	brushed nickel	light bronze
	dark bronze	canon de fusil dark
	canon de fusil light	
brass weight	1.65 lb (0.75 kg)	
general listings	UL Listed	California Title 24
warranty	1 year (5 year on LED) ↗	

Respect distances, cable sections and IP ratings.
Split AC and DC to prevent LED glowing.

© Prado America LLC

We reserve the right, without notice, to change technical details if these, in our opinion do not change appearance or function of the product.

configure yours

21040	·	_ _	·	_ _ _	·	_ _ _	·	_ _ _

product	variant	CRI	CCT *	beam	dimming	finish
21040. acrotrack mini	03. long alu	1 90+	01. 2700K 02. 3000K 03. 3500K	03 20° pc 06 40° pc 07 40° glass 09 60° pc	1. DALI - black adapter 2. 0-10V - black adapter 3. DALI - white adapter 4. 0-10V - white adapter	001 black ano 002 white struc 003 brushed steel 004 brushed grey 005 brushed bronze
			90. dim to warm	07 40° glass	1. DALI - black adapter 2. 0-10V - black adapter 3. DALI - white adapter 4. 0-10V - white adapter	001 black ano 002 white struc 003 brushed steel 004 brushed grey 005 brushed bronze
		2 97	01. 2700K 02. 3000K 03. 3500K	01 10° pc 03 20° pc 06 40° pc 07 40° glass 09 60° pc	1. DALI - black adapter 2. 0-10V - black adapter 3. DALI - white adapter 4. 0-10V - white adapter	001 black ano 002 white struc 003 brushed steel 004 brushed grey 005 brushed bronze
	06. long brass	1 90+	90. dim to warm	07 40° glass	1. DALI - black adapter 2. 0-10V - black adapter 3. DALI - white adapter 4. 0-10V - white adapter	701 brushed nickel 702 light bronze 703 dark bronze 704 canon de fusil dark 705 canon de fusil light
		2 97	01. 2700K 02. 3000K 03. 3500K	01 10° pc 03 20° pc 06 40° pc 07 40° glass 09 60° pc	1. DALI - black adapter 2. 0-10V - black adapter 3. DALI - white adapter 4. 0-10V - white adapter	701 brushed nickel 702 light bronze 703 dark bronze 704 canon de fusil dark 705 canon de fusil light

* other CCT available on request

© Prado America LLC

We reserve the right, without notice, to change technical details if these, in our opinion do not change appearance or function of the product.

finishes

aluminum

white struc (RAL 9003)



brushed steel



brushed bronze



brushed grey



black ano



custom brass

brushed nickel



light bronze



dark bronze



canon de fusil light




canon de fusil dark




Custom RAL and brass finishes available on request.

correlated color temperature (CCT)


2700K: extra warm white




3000K: warm white



3500K: neutral white



dim to warm: 3000K > 1800K



© Prado America LLC

We reserve the right, without notice, to change technical details if these, in our opinion do not change appearance or function of the product.

beam angle


	10° pc	20° pc	40° pc	60° pc	40° glass	dim to warm (40° glass)
long alu	350mA max	500mA max	500mA max	500mA max	700mA max	350mA max
long brass	350mA max	500mA max	500mA max	500mA max	700mA max	350mA max

luminaire output


		350mA			500mA		700mA
		(6.6W, 19.9Vf)	(6.4W, 18.3Vf)	(6.0W, 17.1Vf)	(9.7W, 19.4Vf)	(8.9W, 17.8Vf)	(13.0W, 18.6Vf)
2700K	10° pc	475lm	-	-	-	-	-
	20° pc	-	550lm	-	750lm	-	-
	40° pc	-	550lm	-	750lm	-	-
	60° pc	-	500lm	-	675lm	-	-
	40° glass	-	-	475lm	-	650lm	850lm
3000K	10° pc	500lm	-	-	-	-	-
	20° pc	-	575lm	-	775lm	-	-
	40° pc	-	575lm	-	775lm	-	-
	60° pc	-	525lm	-	700lm	-	-
	40° glass	-	-	500lm	-	675lm	900lm
3500K	10° pc	525lm	-	-	-	-	-
	20° pc	-	600lm	-	800lm	-	-
	40° pc	-	600lm	-	800lm	-	-
	60° pc	-	550lm	-	725lm	-	-
	40° glass	-	-	525lm	-	700lm	925lm
dim to warm	40° glass	-	-	425lm	-	-	-

© Prado America LLC


We reserve the right, without notice, to change technical details if these, in our opinion do not change appearance or function of the product.

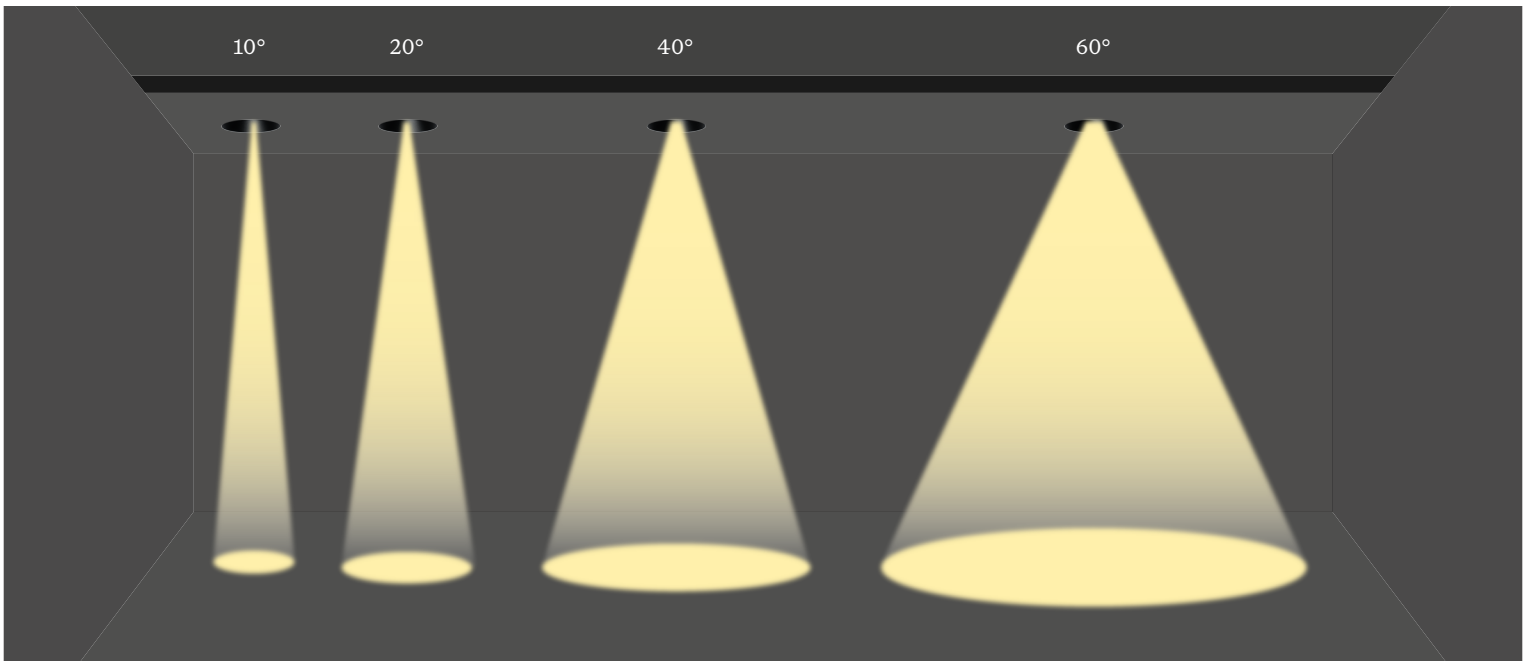


10° pc

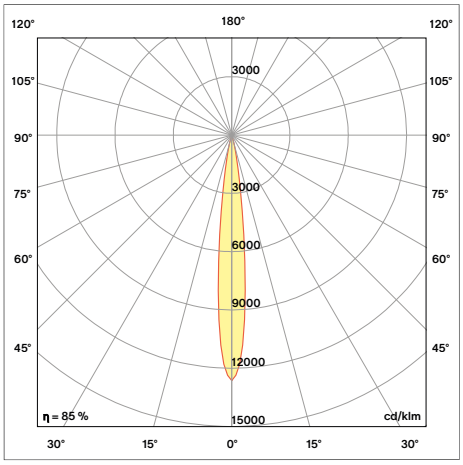


20° pc

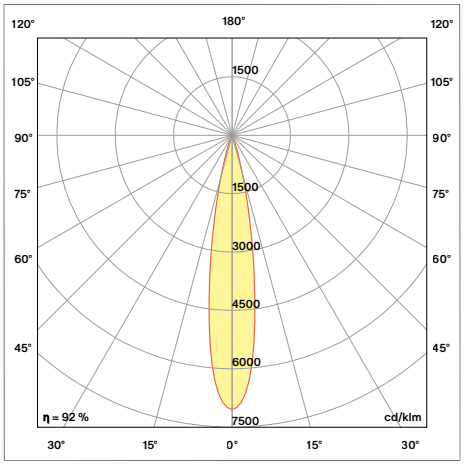


40° pc

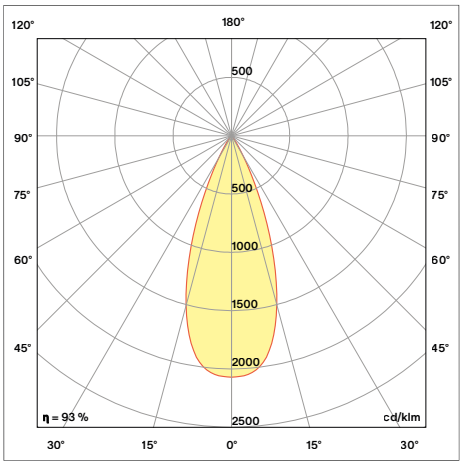


60° pc

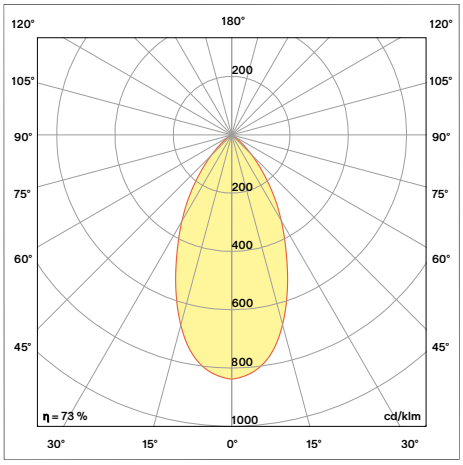

40° glass

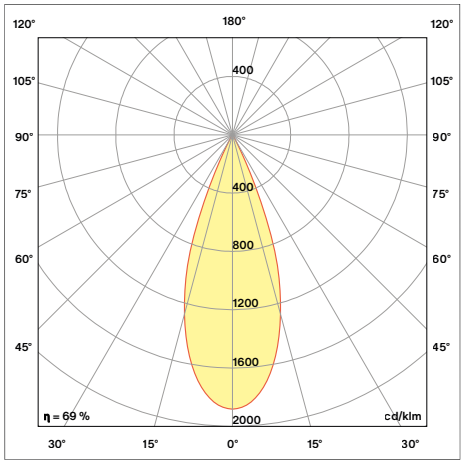

dim to warm (40° glass)

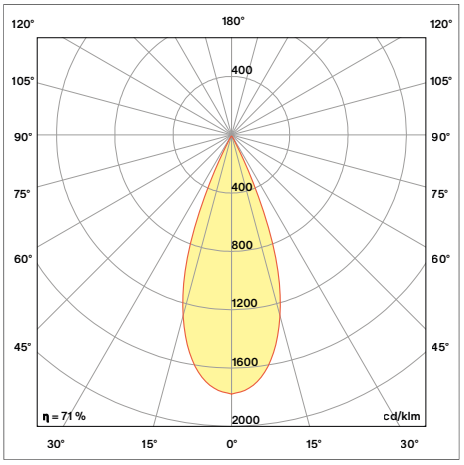

© Prado America LLC

We reserve the right, without notice, to change technical details if these, in our opinion do not change appearance or function of the product.


accessories

drivers (incl.)	Title 24 JA8 compliant	UL listed	product code
48V track driver 100W	no	yes	9000-1027


© Prado America LLC


We reserve the right, without notice, to change technical details if these, in our opinion do not change appearance or function of the product.

acrotrack - accessories

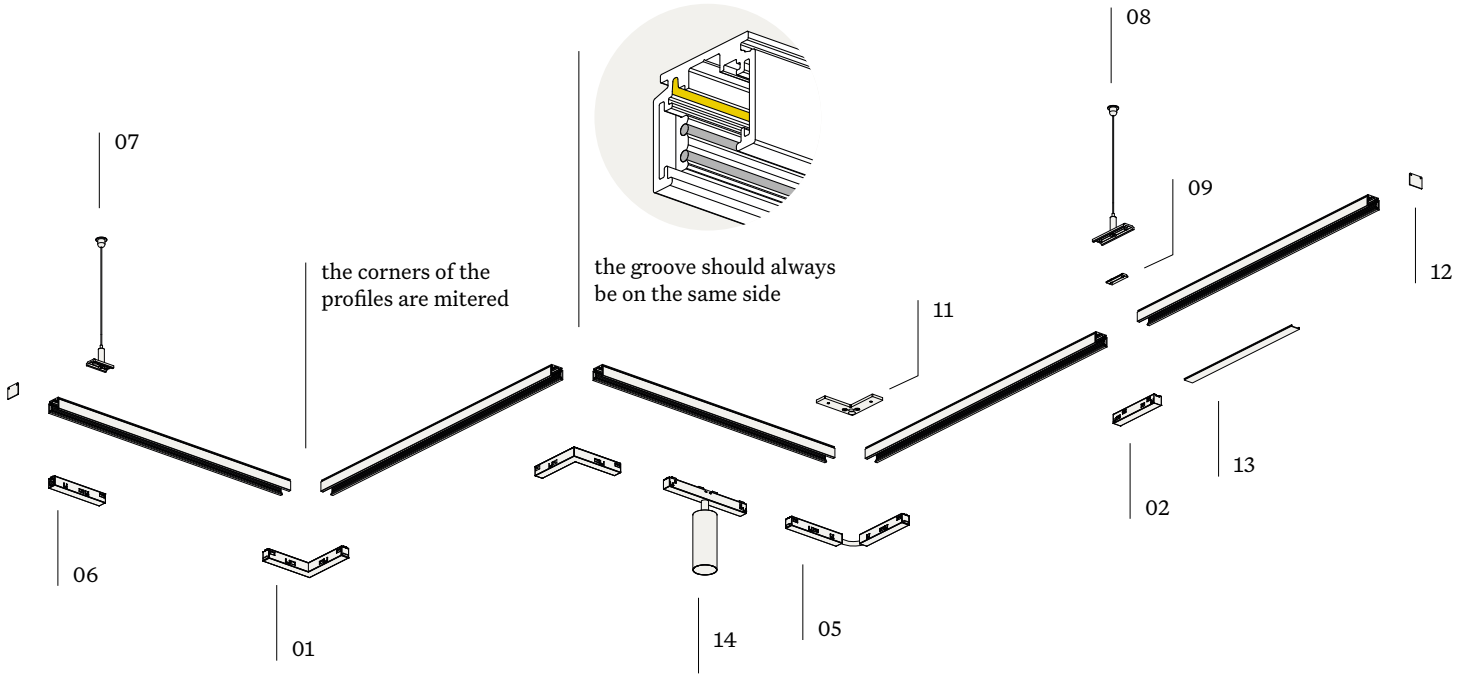

legend		product code	
01	L feed	8000-1314 (black)	8000-2868 (white)
02	middle feed	8000-1313 (black)	8000-2867 (white)
03	X feed	8000-7462 (black)	8000-8166 (white)
04	T feed	8000-8161 (black)	8000-8052 (white)
05	adjustable corner	8000-5275 (black)	8000-8167 (white)
06	end feed	8000-1312 (black)	8000-2866 (white)
07	pendant kit end	8000-3094	
08	pendant kit middle	8000-3095	
09	trimless middle bracket	8000-2871 (black)	8000-3012 (white)
10	trimless bracket (4 pcs)	8000-2870	
11	trimless L-bracket	8000-2869	
12	end cap surface	8000-1310 (black)	8000-2865 (white)
	end cap pendant	8000-5275 (black)	8000-3096 (white)
	end cap trimless	8000-2860 (black)	8000-2862 (white)
	end cap trim	8000-5275 (black)	8000-8167 (white)
13	aesthetic cover	8000-6836 (black)	8000-6837 (white)
14	acrotrack fixture	acrotrack mini long	acrotrack mini short

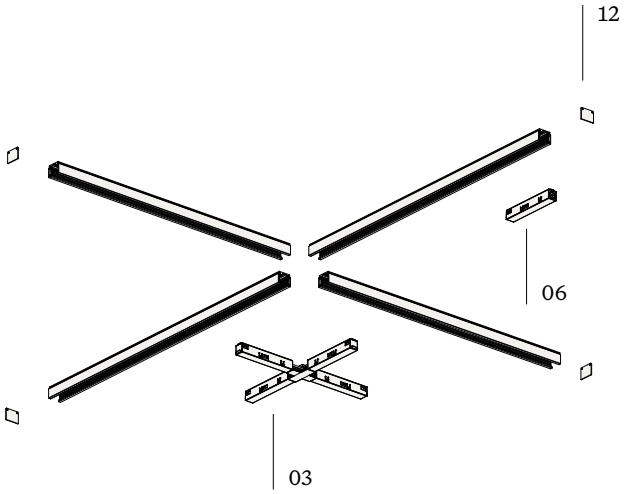


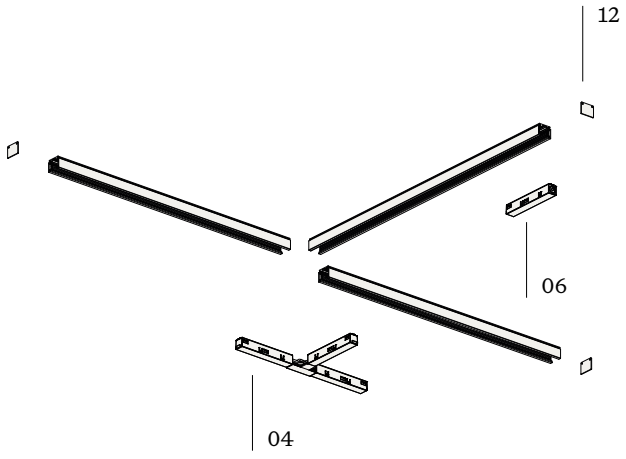


© Prado America LLC


We reserve the right, without notice, to change technical details if these, in our opinion do not change appearance or function of the product.

track polarity

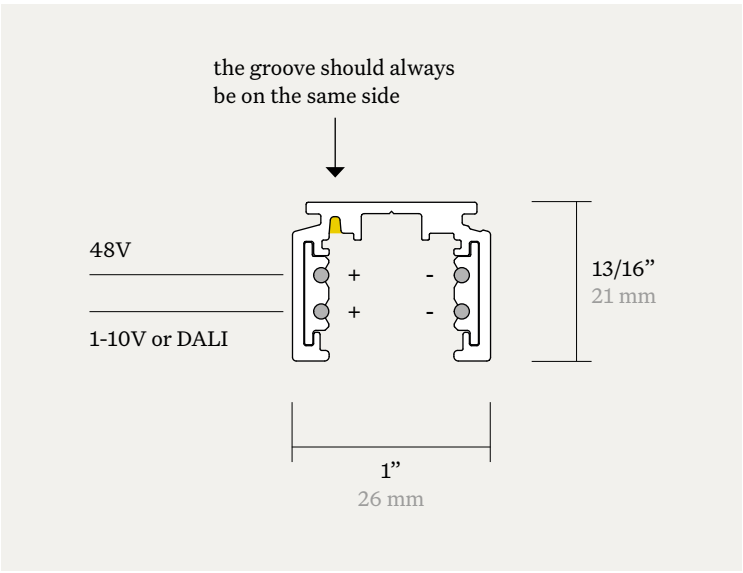

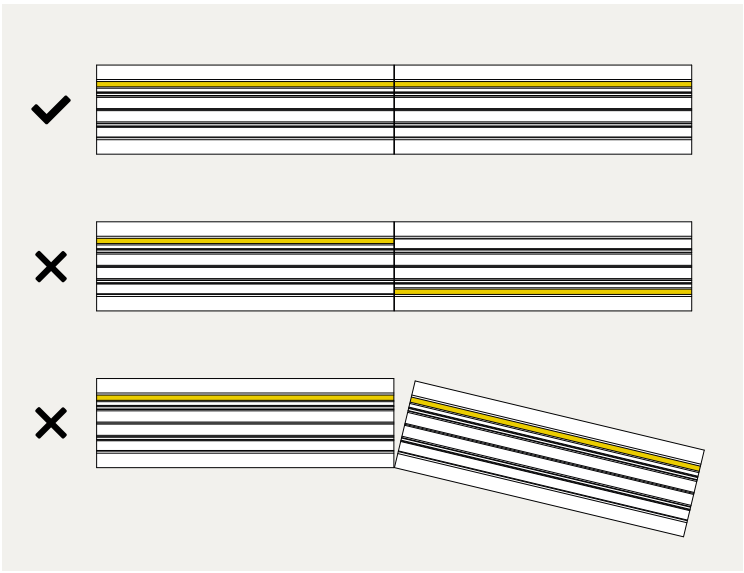


middle feed

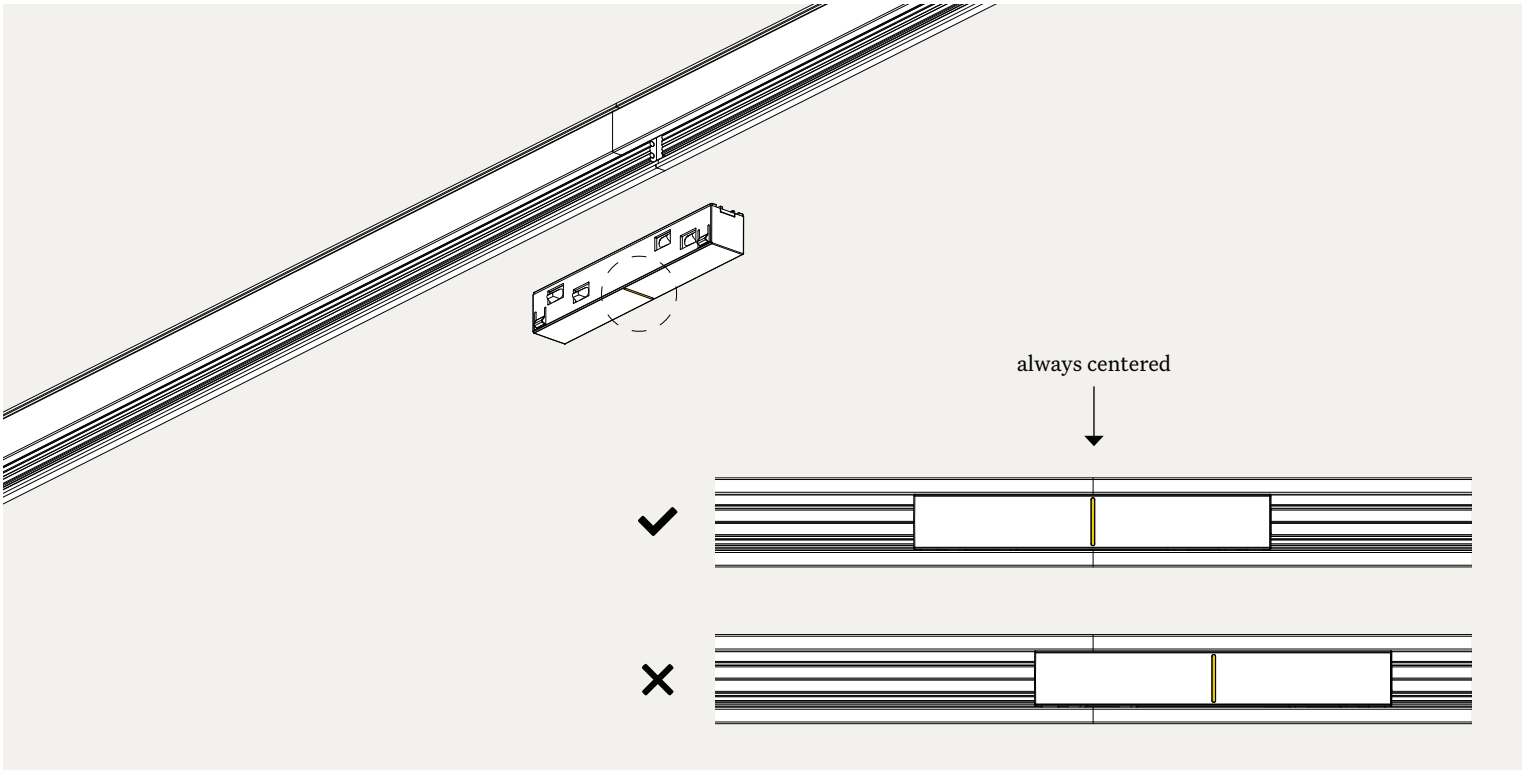

© Prado America LLC


We reserve the right, without notice, to change technical details if these, in our opinion do not change appearance or function of the product.

acrotrack - profiles

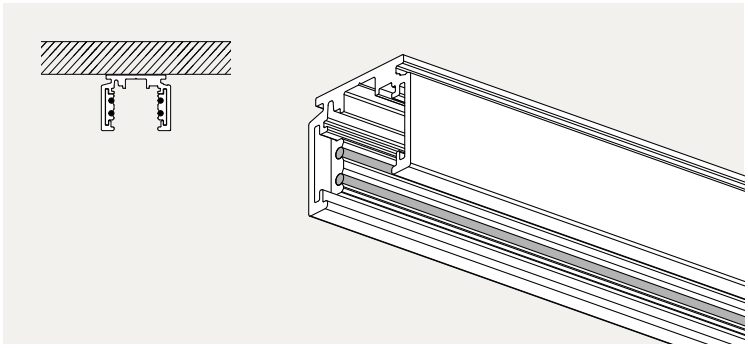


surface

application		ceiling indoor (surface)	
dimensions (w x h)		1-1/32 x 13/16″ (26 x 21 mm)	
product code *	(4 ft)	9000-1301 (black)	9000-1302 (white)
	(8 ft)	9000-1309 (black)	9000-1310 (white)

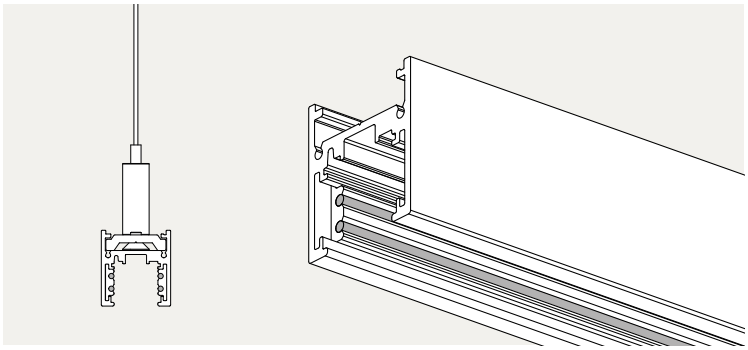


pendant

application		ceiling indoor (pendant)	
dimensions (w x h)		1-1/32 x 1-1/8″ (26 x 29 mm)	
product code *	(4 ft)	9000-1305 (black)	9000-1306 (white)
	(8 ft)	9000-1313 (black)	9000-1314 (white)

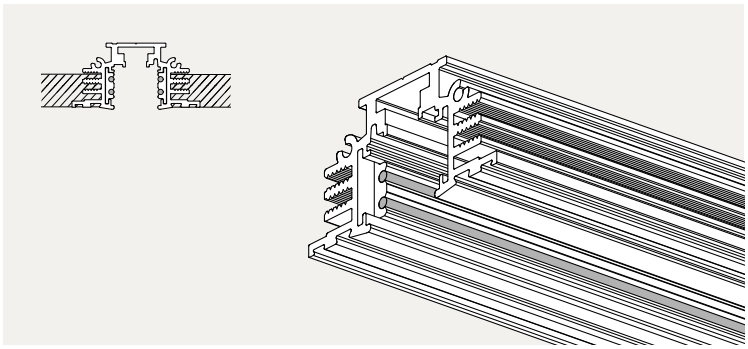

trimless

application		ceiling indoor (plastered ceiling)	
dimensions (w x h)		1-9/10 x 1″ (48 x 25 mm)	
product code *	(4 ft)	9000-1303 (black)	9000-1304 (white)
	(8 ft)	9000-1311 (black)	9000-1312 (white)

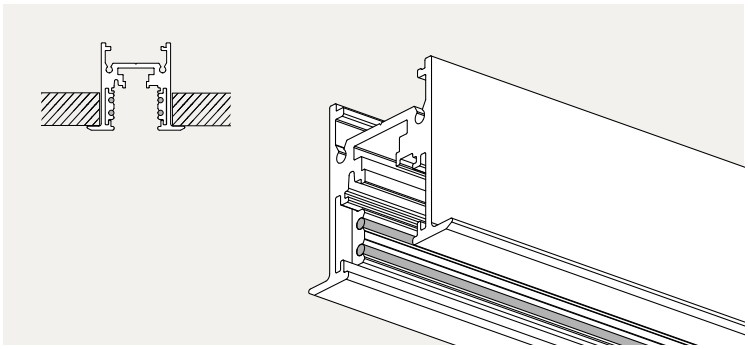

trim


application		ceiling indoor (plastered ceiling)	
dimensions (w x h)		1-7/16 x 1-3/10″ (37 x 33 mm)	
product code *	(4 ft)	9000-1307 (black)	9000-1308 (white)
	(8 ft)	9000-1315 (black)	9000-1316 (white)


* Custom RAL finishes available on request.

© Prado America LLC

We reserve the right, without notice, to change technical details if these, in our opinion do not change appearance or function of the product.

surface ceiling fixation

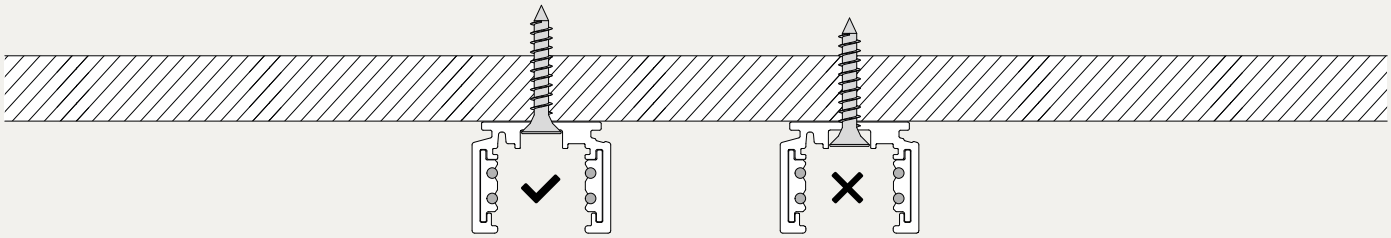


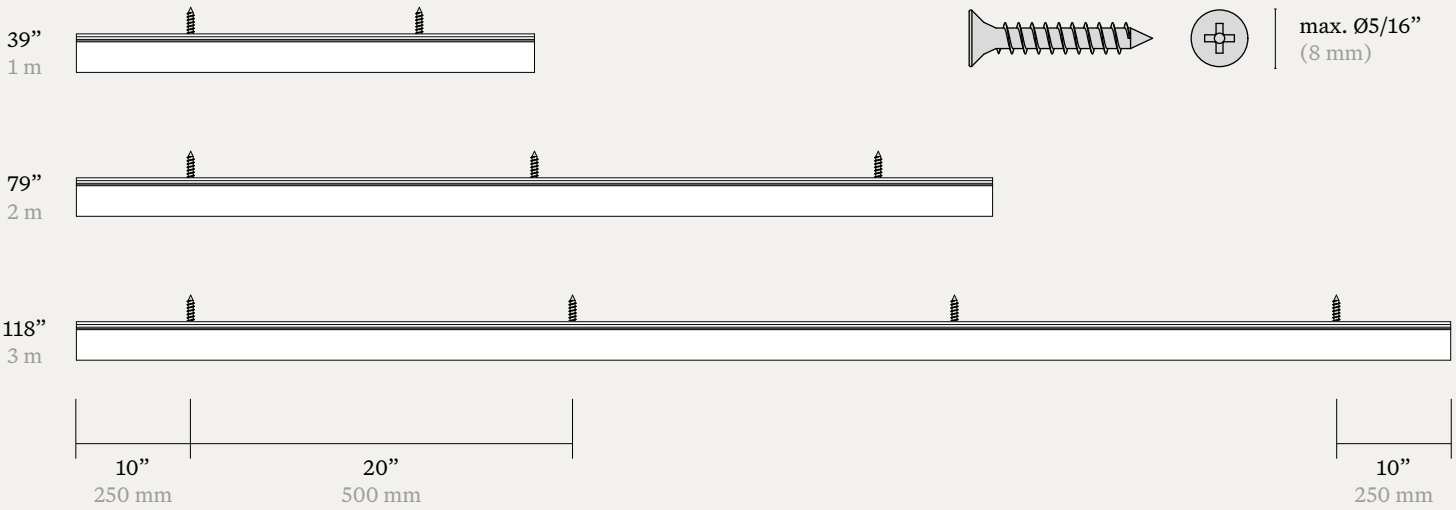


© Prado America LLC


We reserve the right, without notice, to change technical details if these, in our opinion do not change appearance or function of the product.


pendant ceiling fixation

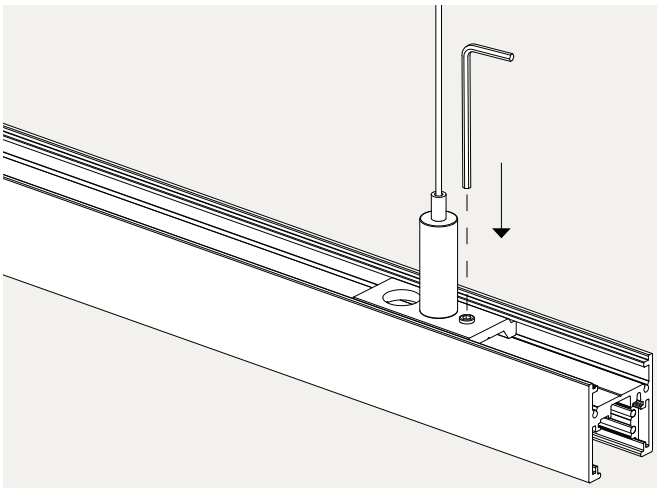

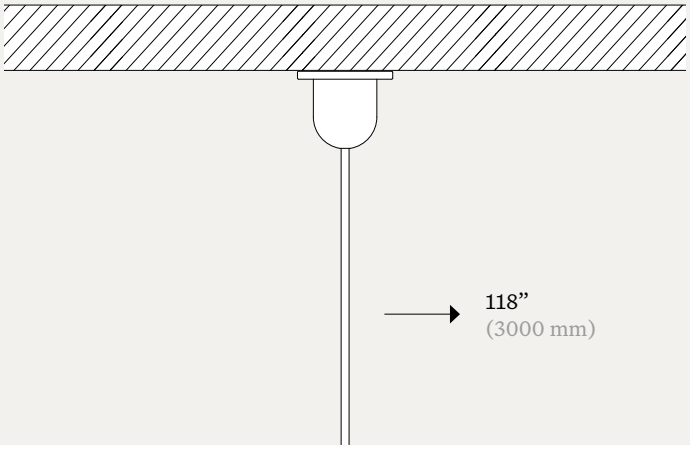


max. load

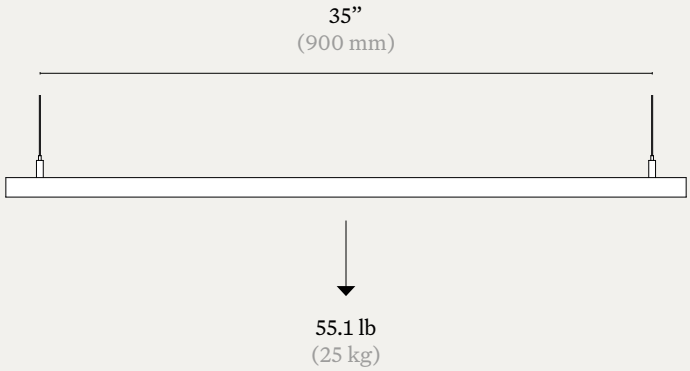

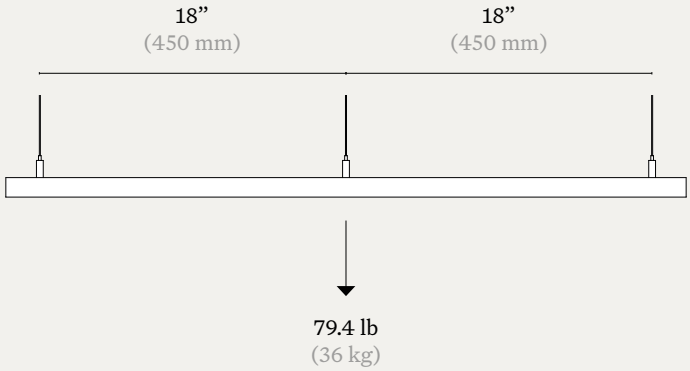


distributed load

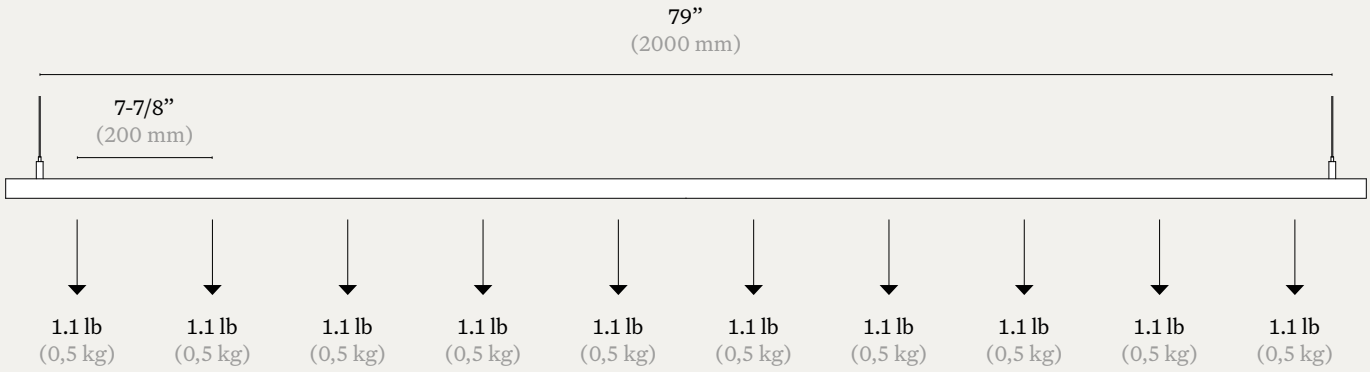


© Prado America LLC

We reserve the right, without notice, to change technical details if these, in our opinion do not change appearance or function of the product.

trimless ceiling fixation

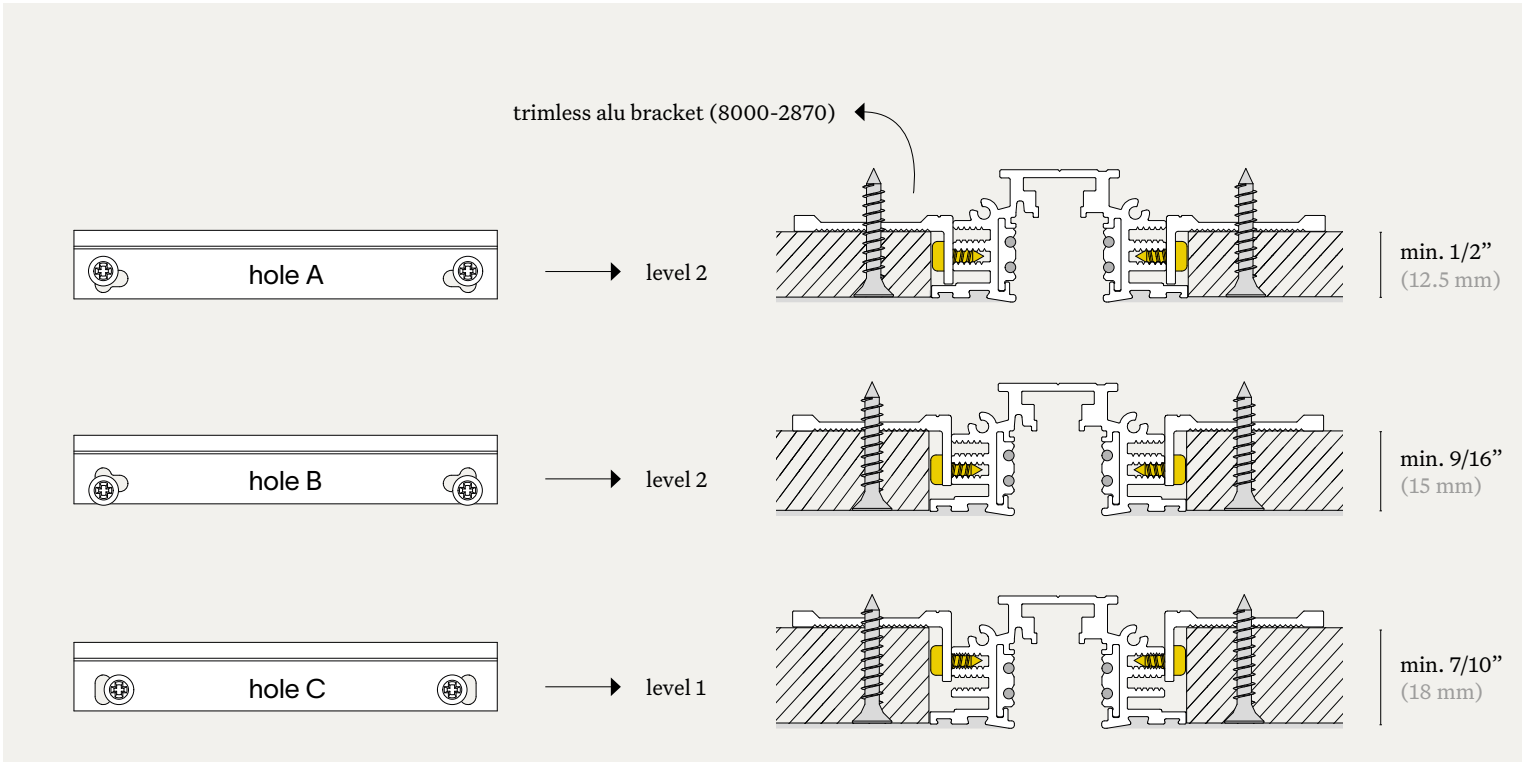

trim ceiling fixation

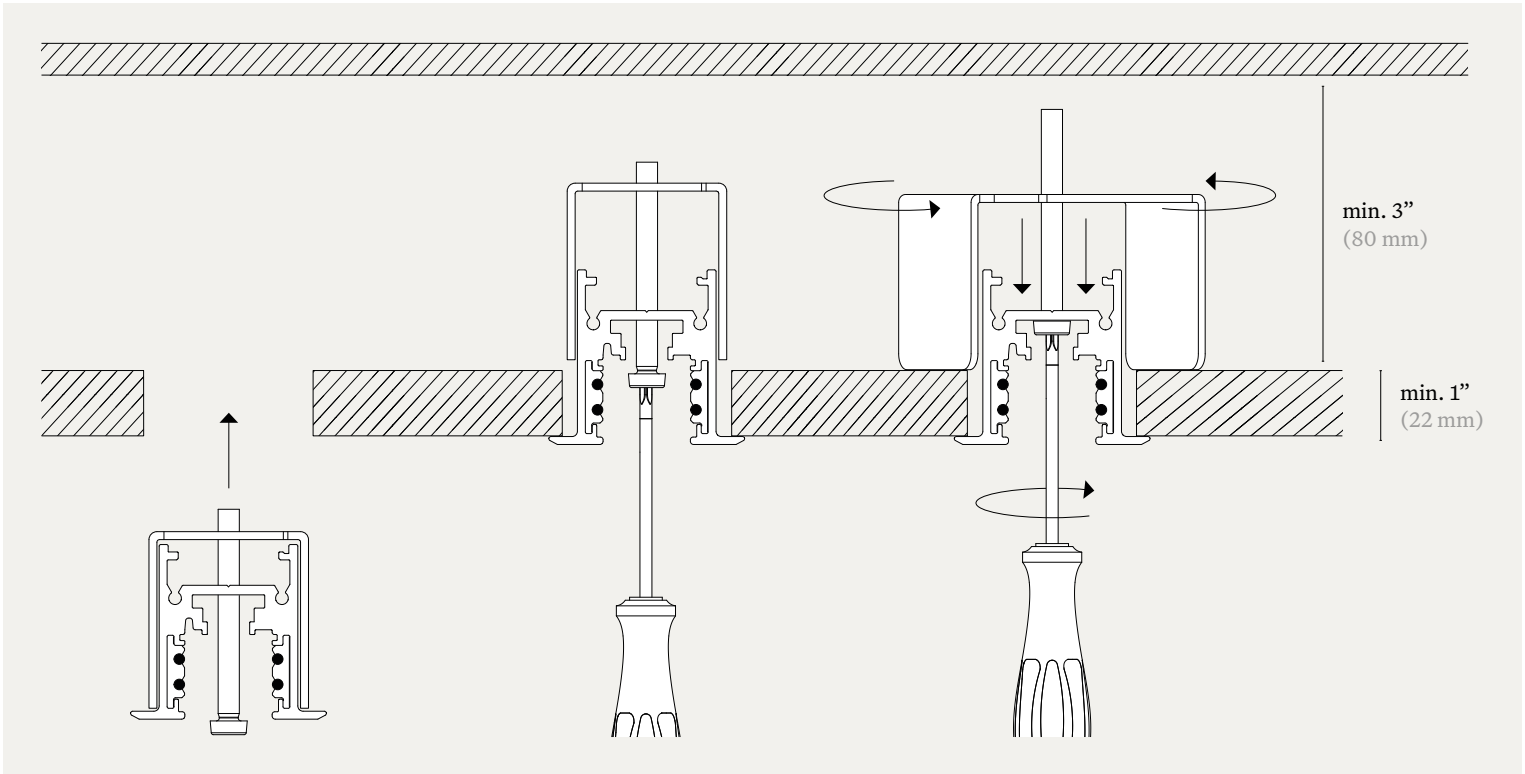

© Prado America LLC

We reserve the right, without notice, to change technical details if these, in our opinion do not change appearance or function of the product.