constant current driver matrix

constant current

type	product code	dimming	cut-out	installation depth*	forward voltage	current	max. wattage	10° pc	20-60° pc	15-60° gl	wallwash	D2W	micro	10° outdoor	IP	dimensions (mm)	link
DALI dimmable driver 38W constant current multi power	8000-0021	DALI / PUSH	plaster ring Ø57	150 mm	10-54V	350mA	18W	1-2 fx	1-2 fx	1-2 fx	1-2 fx	1-2 fx	4-14 fx	-	IP20	146.5 x 44 x 30	↗
						500mA	27W	-	1-2 fx	1-2 fx	1-2 fx	-	4-14 fx	-	IP20	146.5 x 44 x 30	
						700mA	38W	-	-	1-2 fx	-	-	4-14 fx	-	IP20	146.5 x 44 x 30	
					10-36V	1050mA	38W	-	-	-	-	-	4-10 fx	-	IP20	146.5 x 44 x 30	
1-10V dimmable driver 36W constant current multi power	8000-0022	1-10V	plaster ring Ø57	130 mm	10-54V	350mA	18W	1-2 fx	1-2 fx	1-2 fx	1-2 fx	1-2 fx	4-14 fx	-	IP20	129 x 42 x 30	↗
						500mA	27W	-	1-2 fx	1-2 fx	1-2 fx	-	4-14 fx	-	IP20	129 x 42 x 30	
					10-51V	700mA	36W	-	-	1-2 fx	-	-	4-14 fx	-	IP20	129 x 42 x 30	
					10-35V	1050mA	36W	-	-	-	-	-	4-10 fx	-	IP20	129 x 42 x 30	
non-dimmable driver 42W constant current multi power	8000-0023	not dimmable	plaster ring Ø57	150 mm	3-44V	350mA	15W	1-2 fx	1-2 fx	1-2 fx	1-2 fx	1-2 fx	2-12 fx	-	IP20	146.5 x 43 x 30	↗
						500mA	22W	-	1-2 fx	1-2 fx	1-2 fx	-	2-12 fx	-	IP20	146.5 x 43 x 30	
						700mA	31W	-	-	1-2 fx	-	-	2-12 fx	-	IP20	146.5 x 43 x 30	
					3-40V	1050mA	42W	-	-	-	-	-	2-10 fx	-	IP20	146.5 x 43 x 30	
CASAMBI dimmable driver 38W constant current multi power	8000-0028	Casambi / PUSH	plaster ring Ø57	150 mm	10-54V	350mA	18W	1-2 fx	1-2 fx	1-2 fx	1-2 fx	1-2 fx	4-14 fx	-	IP20	146.5 x 44 x 30	↗
						500mA	27W	-	1-2 fx	1-2 fx	1-2 fx	-	4-14 fx	-	IP20	146.5 x 44 x 30	
					10-51V	700mA	36W	-	-	1-2 fx	-	-	4-14 fx	-	IP20	146.5 x 44 x 30	
					10-36V	1050mA	38W	-	-	-	-	-	4-10 fx	-	IP20	146.5 x 44 x 30	
DALI dimmable driver mini slim 15W constant current NFC 350mA	8000-0060	DALI / PUSH	plaster ring Ø38	140 mm	3-46V	350mA	15W	1-2 fx	1 fx	1 fx	1 fx	1 fx	2-4 fx	-	IP20	134 x 22 x 20	↗
DALI dimmable driver mini slim 15W constant current NFC 500mA	8000-0065	DALI / PUSH	plaster ring Ø38	140 mm	3-30V	500mA	15W	-	1 fx	1 fx	1 fx	-	2-4 fx	-	IP20	134 x 22 x 20	↗
DALI dimmable driver mini slim 15W constant current NFC 700mA	8000-0066	DALI / PUSH	plaster ring Ø38	140 mm	3-21V	700mA	15W	-	-	1 fx	-	-	2-4 fx	-	IP20	134 x 22 x 20	↗

constant current multipower

type	product code	dimming	cut-out	installation depth*	forward voltage	current	max. wattage	10° pc	20-60° pc	15-60° gl	wallwash	D2W	micro	10° outdoor	IP	dimensions (mm)	link
DALI / 0-10V dimmable driver 60W constant current multi power	8000-0026	DALI/0-10V/PUSH	remote	-	20-112V	350mA	39W	2-5 fx	2-5 fx	2-5 fx	2-5 fx	2-5 fx	10-30 fx	-	IP20	124 x 79 x 22	↗
					2-112V	500mA	56W	-	2-5 fx	2-5 fx	2-5 fx	-	10-30 fx	-	IP20	124 x 79 x 22	
					2-86V	700mA	60W	-	-	2-4 fx	-	-	10-25 fx	-	IP20	124 x 79 x 22	

© Prado Europe bv
We reserve the right, without notice, to change technical details if these, in our opinion do not change appearance or function of the product.

constant current driver matrix

deep dim

type	product code	dimming	cut-out	installation depth*	forward voltage	current	max. wattage	10° pc	20-60° pc	15-60° gl	wallwash	D2W	micro	10° outdoor	IP	dimensions (mm)	link
DALI deep dim driver 20W constant current 350mA	8000-0031	DALI	plaster ring Ø57	120 mm	2-40V	350mA	20W	1-2 fx	1-2 fx	1-2 fx	1-2 fx	1-2 fx	1-10 fx	-	IP20	151 x 43 x 28	↗
DALI deep dim driver 20W constant current 500mA	8000-0030	DALI	plaster ring Ø57	120 mm	2-40V	500mA	20W	-	1-2 fx	1-2 fx	1-2 fx	-	1-10 fx	-	IP20	151 x 43 x 28	
DALI deep dim driver 20W constant current 700mA	8000-0027	DALI	plaster ring Ø57	120 mm	2-28V	700mA	20W	-	1 fx	1-2 fx	-	-	1-6 fx	-	IP20	151 x 43 x 28	

low voltage

type	product code	dimming	cut-out	installation depth*	forward voltage	current	max. wattage	10° pc	20-60° pc	15-60° gl	wallwash	D2W	micro	10° outdoor	IP	dimensions (mm)	link
DALI dimmable power converter 48V to 350-700mA	8000-0037	DALI / PUSH	plaster ring Ø38	90 mm	2-19V	350mA	13W	1 fx	1 fx	1 fx	1 fx	1 fx	1-5 fx	-	IP20	82 x 27 x 16.5	↗
			plaster ring Ø57			500mA	13W	-	1 fx	1 fx	1 fx	-	1-5 fx	-	IP20	82 x 27 x 16.5	
						700mA	13W	-	-	1 fx	-	-	1-5 fx	-	IP20	82 x 27 x 16.5	
					2-43V	350mA	29W	1-2 fx	1-2 fx	1-2 fx	1-2 fx	1-2 fx	1-10 fx	-	IP20	82 x 27 x 16.5	
						500mA	29W	-	1-2 fx	1-2 fx	1-2 fx	-	1-10 fx	-	IP20	82 x 27 x 16.5	
						700mA	29W	-	-	1-2 fx	-	-	1-10 fx	-	IP20	82 x 27 x 16.5	

constant current high current micro

type	product code	dimming	cut-out	installation depth*	forward voltage	current	max. wattage	10° pc	20-60° pc	15-60° gl	wallwash	D2W	micro	10° outdoor	IP	dimensions (mm)	link
DALI / push dimmable driver 52W for micro short - 1050mA	8000-0062	DALI	remote	-	2-55V	1050mA	-	-	-	-	-	-	1-15 fx	-	IP20	153 x 76 x 31	↗
DALI / push dimmable driver 52W for micro long - 1400mA	8000-0063	DALI	remote	-	2-55V	1400mA	-	-	-	-	-	-	1-10 fx	-	IP20	153 x 76 x 31	↗

phase dimming

type	product code	dimming		installation depth*	forward voltage	current	max. wattage	10° pc	20-60° pc	15-60° gl	wallwash	D2W	micro	10° outdoor	IP	dimensions (mm)	link
TRIAC dimmable driver 7W constant current 350mA	8000-0034	TRIAC	plaster ring Ø57	130 mm	3-20V	350mA	7W	1 fx	1 fx	1 fx	1 fx	1 fx	2-5 fx	-	IP20	101.5 x 49 x 29	↗
TRIAC dimmable driver 10W constant current 500mA	8000-0035	TRIAC	plaster ring Ø57	130 mm	3-20V	500mA	10W	-	1 fx	1 fx	1 fx	-	2-5 fx	-	IP20	101.5 x 49 x 29	↗
TRIAC dimmable driver 14W constant current 700mA	8000-0046	TRIAC	plaster ring Ø57	130 mm	3-20V	700mA	14W	-	-	1 fx	-	-	2-5 fx	-	IP20	123.5 x 33 x 20	↗
TRIAC dimmable driver mini 10W constant current 350mA	8000-0043	TRIAC	plaster ring Ø57	60 mm	15-29V	350mA	10W	1 fx	1 fx	1 fx	1 fx	1 fx	-	-	IP20	58 x 36 x 20	↗
TRIAC dimmable driver mini 10W constant current 500mA	8000-0044	TRIAC	plaster ring Ø57	60 mm	10-20V	500mA	10W	-	1 fx	1 fx	1 fx	-	-	-	IP20	58 x 36 x 20	↗

© Prado Europe bv

We reserve the right, without notice, to change technical details if these, in our opinion do not change appearance or function of the product.


constant current driver matrix

outdoor

type	product code	dimming	cut-out	installation depth*	forward voltage	current	max. wattage	10° pc	20-60° pc	15-60° gl	wallwash	D2W	micro	10° outdoor	IP	dimensions (mm)	link
IP68 DALI dimmable driver 38W constant current 350mA	8000-0050	DALI / PUSH	remote	-	10-54V	350mA	18W	1-2 fx	1-2 fx	1-2 fx	-	-	-	1-4 fx	IP68	127 x 47 x 28	↗
IP68 DALI dimmable driver 38W constant current 500mA	8000-0039	DALI / PUSH	remote	-	10-54V	500mA	27W	-	1-2 fx	1-2 fx	-	-	-	1-4 fx	IP68	127 x 47 x 28	
IP68 DALI dimmable driver 38W constant current 700mA	8000-0051	DALI / PUSH	remote	-	10-54V	700mA	38W	-	-	1-2 fx	-	-	-	-	IP68	127 x 47 x 28	
IP68 non-dimmable driver IPR2 17W constant current 350mA	8000-0054	Non DIM	remote	-	5-49V	350mA	17W	1-2 fx	1-2 fx	1-2 fx	-	-	-	1-3 fx	IP68	122 x 54 x 26 mm	
IP68 non-dimmable driver IPR2 24W constant current 500mA	8000-0055	Non DIM	remote	-	5-49V	500mA	24W	-	1-2 fx	1-2 fx	-	-	-	1-3 fx	IP68	122 x 54 x 26 mm	
IP68 non-dimmable driver IPR2 30W constant current 700mA	8000-0056	Non DIM	remote	-	5-43V	700mA	30W	-	-	1-2 fx	-	-	-	-	IP68	122 x 54 x 26 mm	
IP68 DC mini jolly 1-10V dimmable driver IPR2 16W 350mA	8000-0057	1-10V	remote	-	2-46V	350mA	16W	1-2 fx	1-2 fx	1-2 fx	-	-	-	1-3 fx	IP68	122 x 54 x 26 mm	
IP68 DC mini jolly 1-10V dimmable driver IPR2 20W 500mA	8000-0058	1-10V	remote	-	2-40V	500mA	20W	-	1-2 fx	1-2 fx	-	-	-	1-3 fx	IP68	122 x 54 x 26 mm	
IP68 DC mini jolly 1-10V dimmable driver IPR2 17W 700mA	8000-0059	1-10V	remote	-	2-24V	700mA	17W	-	-	1 fx	-	-	-	-	IP68	122 x 54 x 26 mm	

© Prado Europe bv
We reserve the right, without notice, to change technical details if these, in our opinion do not change appearance or function of the product.

constant current driver matrix

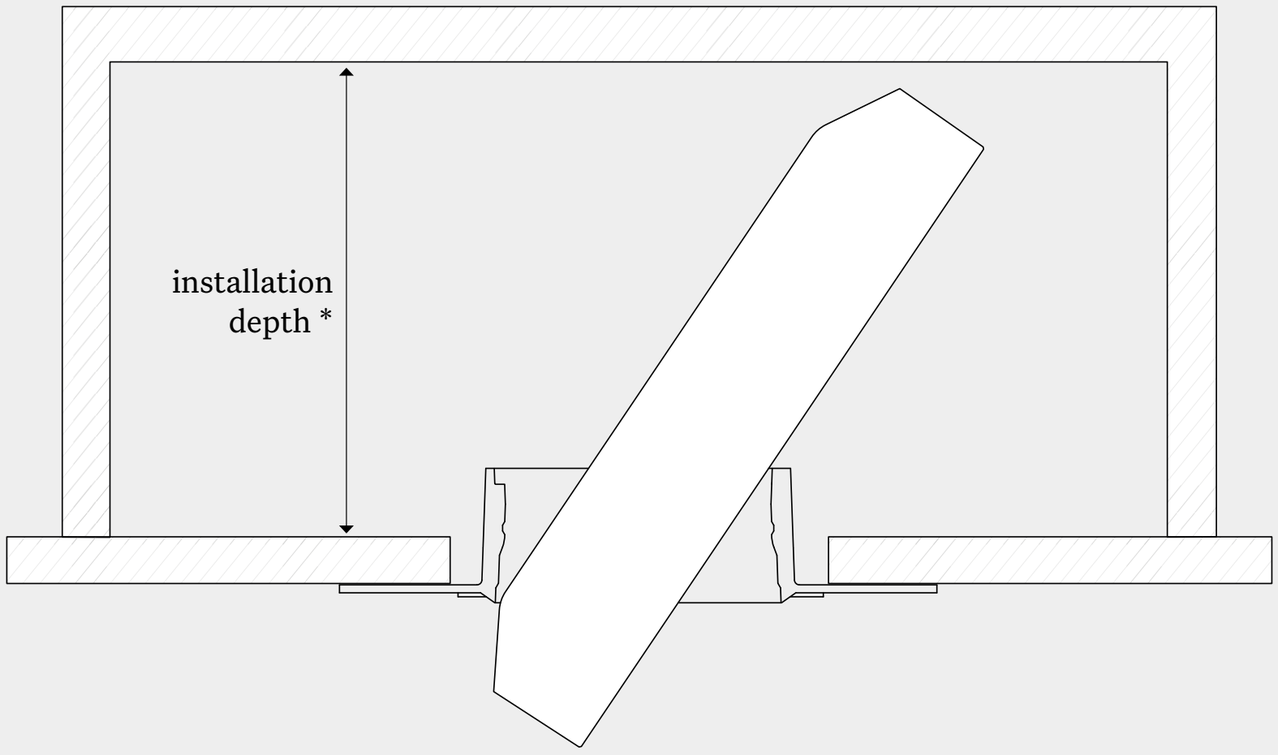

© Prado Europe bv

We reserve the right, without notice, to change technical details if these, in our opinion do not change appearance or function of the product.

constant voltage driver matrix

light + motion 48V

type	product code	dimming	forward voltage	max. wattage	IP	dimensions (mm)	link
48V driver 12W constant voltage	8000-0052	non dimmable	48V	12W	IP67	56 x 39 x 26	↗

track 48V

type	product code	dimming	forward voltage	max. wattage	IP	dimensions (mm)	link
48V track driver 70W	8000-0024	non dimmable	48V	70W	IP20	225 x 60 x 36	↗
48V track driver 150W	8000-0025	non dimmable	48V	150W	IP20	240 x 60 x 49	↗
48V track driver 240W	8000-0033	non dimmable	48V	240W	IP67	244 x 71 x 38	↗
48V track driver 100W	8000-0045	non dimmable	48V	100W	IP67	200 x 63 x 35	↗
48V track driver 100W	8000-0061	3 in 1 dimming	48V	100W	IP67	200 x 63 x 35	↗
Casambi driver	8000-0047	DALI Gateway	48V	-	IP20	166 x 18 x 18	↗

ledstrips 24V / oudoor 24V

type	product code	dimming	forward voltage	max. wattage	IP	dimensions (mm)	link
IP68 24V constant voltage DALI PWM driver 60W	8000-0040	DALI	24V	60W	IP67	150 x 53 x 35	↗
IP68 24V constant voltage DALI PWM driver 120W	8000-0041	DALI	24V	120W	IP67	191 x 63 x 37,5	↗
IP68 24V constant voltage DALI PWM PUSH driver 200W	8000-0042	DALI	24V	200W	IP67	195 x 68 x 39,5	↗

© Prado Europe bv We reserve the right, without notice, to change technical details if these, in our opinion do not change appearance or function of the product.