
clt ring jack


installation instruction

1

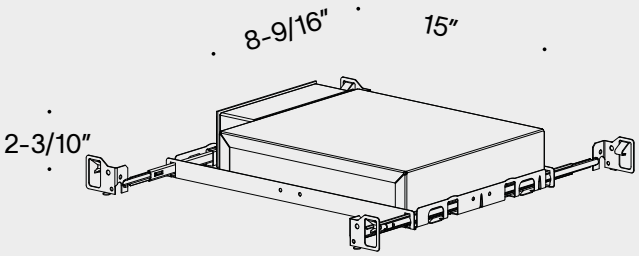


housing

IC
AT

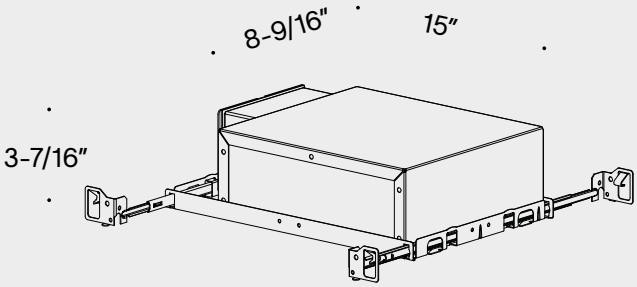


housing

IC
AT

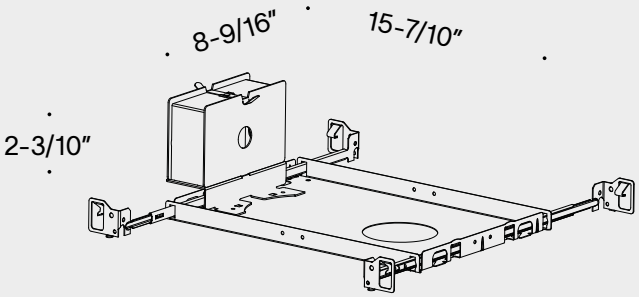

housing

NIC

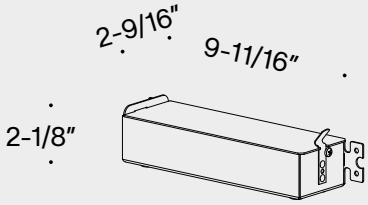


remodel


IJB

Install the appropriate IC/driver box.


2

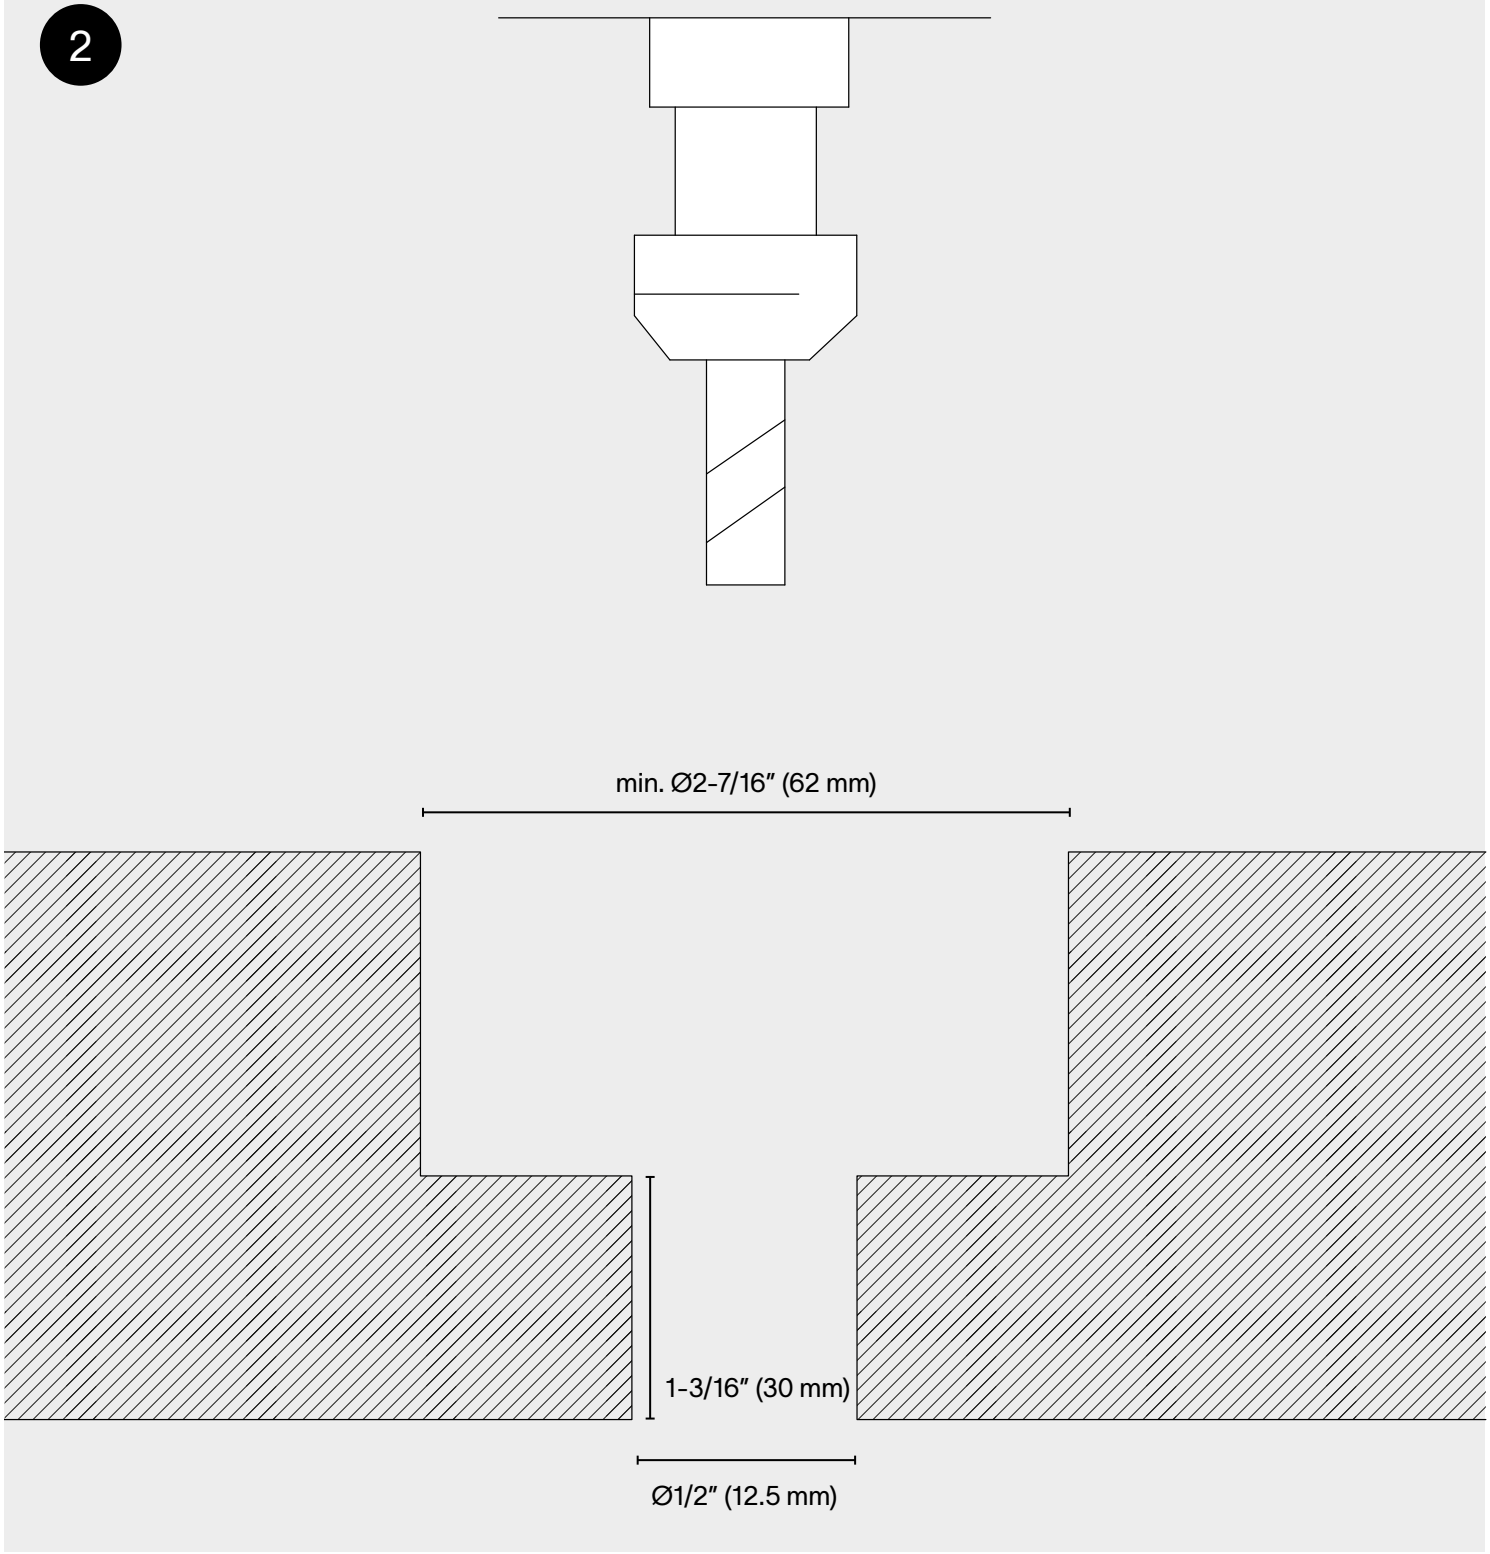

Mill a round hole with the above dimensions.

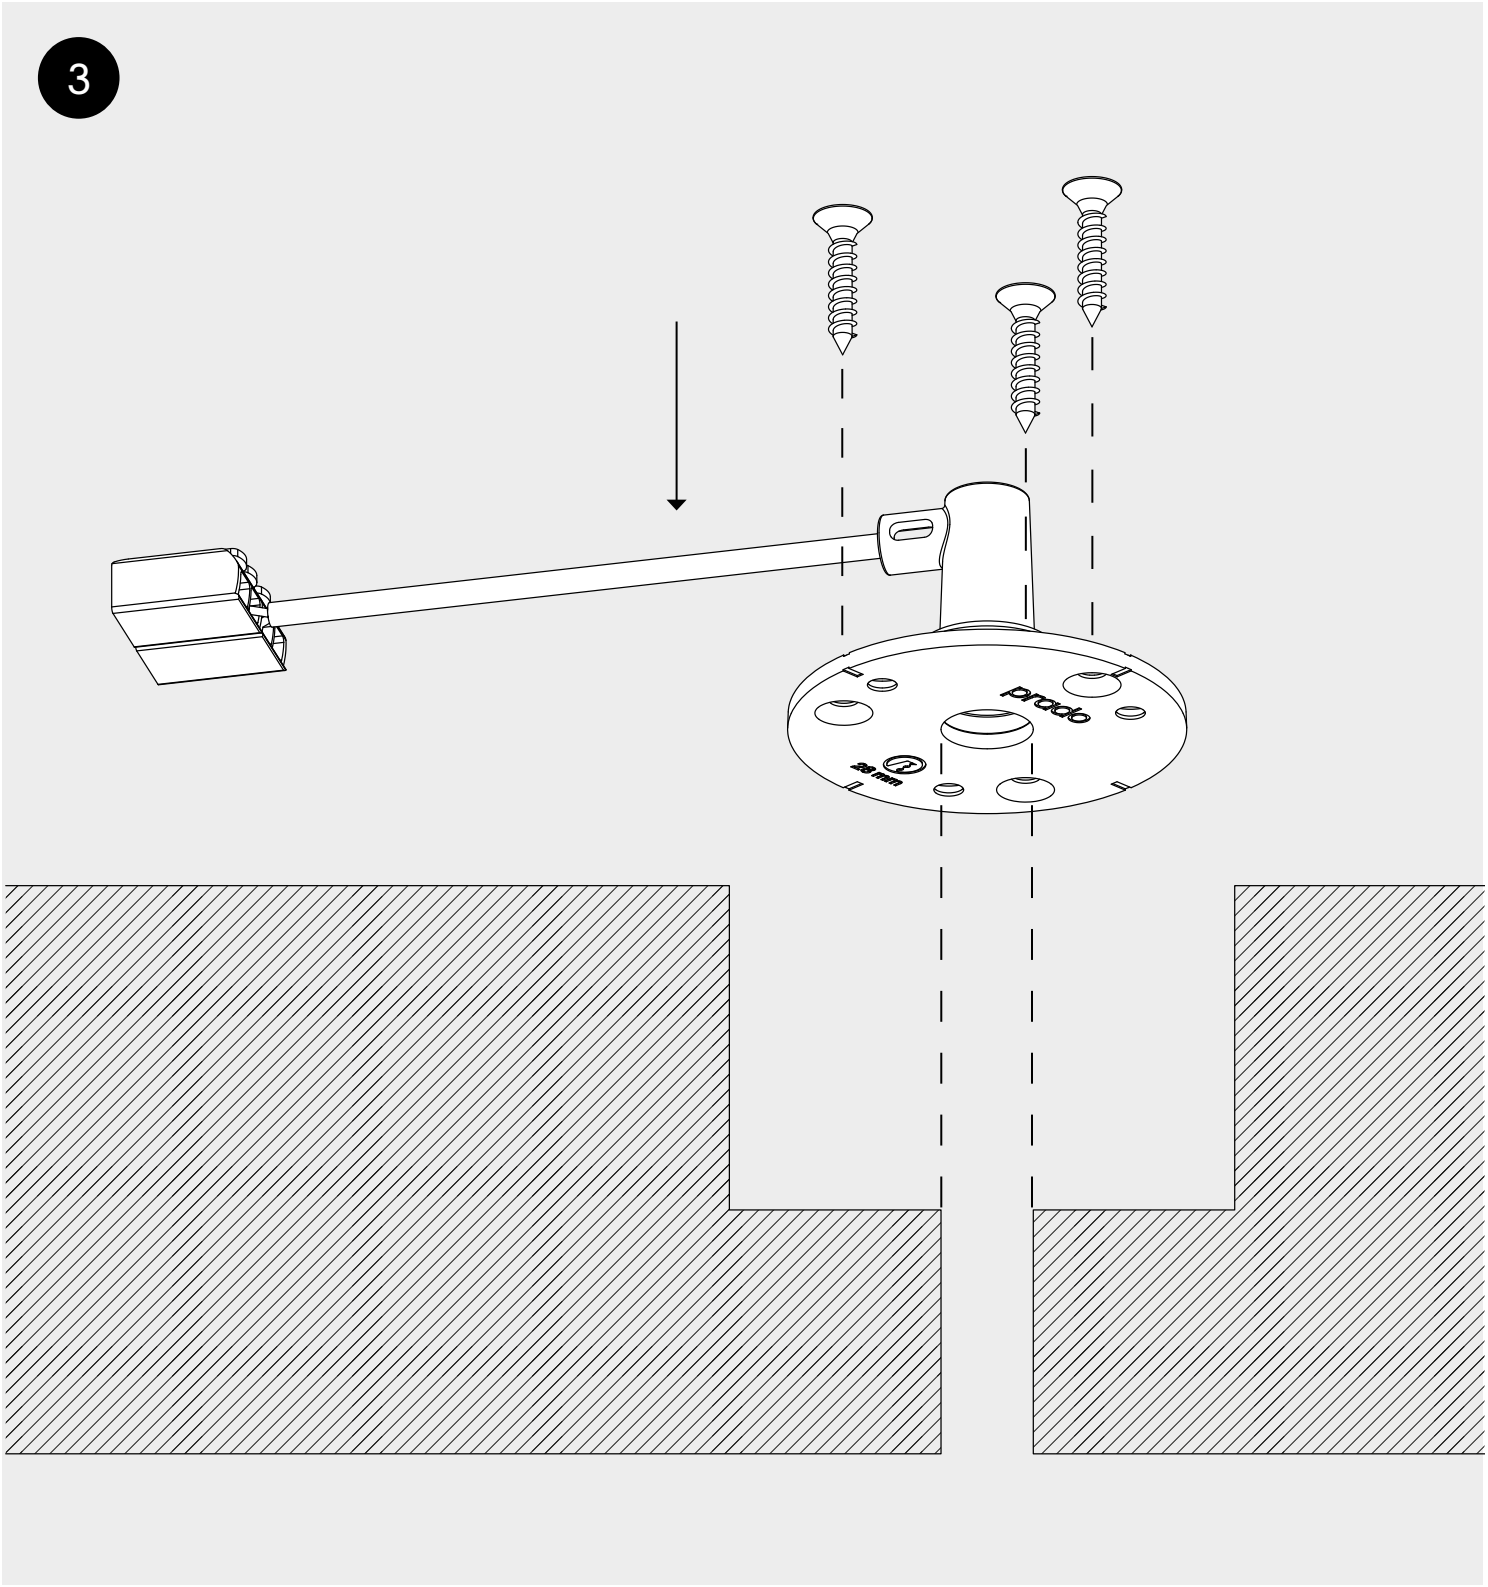


Fasten the clt ring and securely fasten it with the appropriate screws on a screw-fast surface. It’s the installers responsability to ensure optimal attachment.

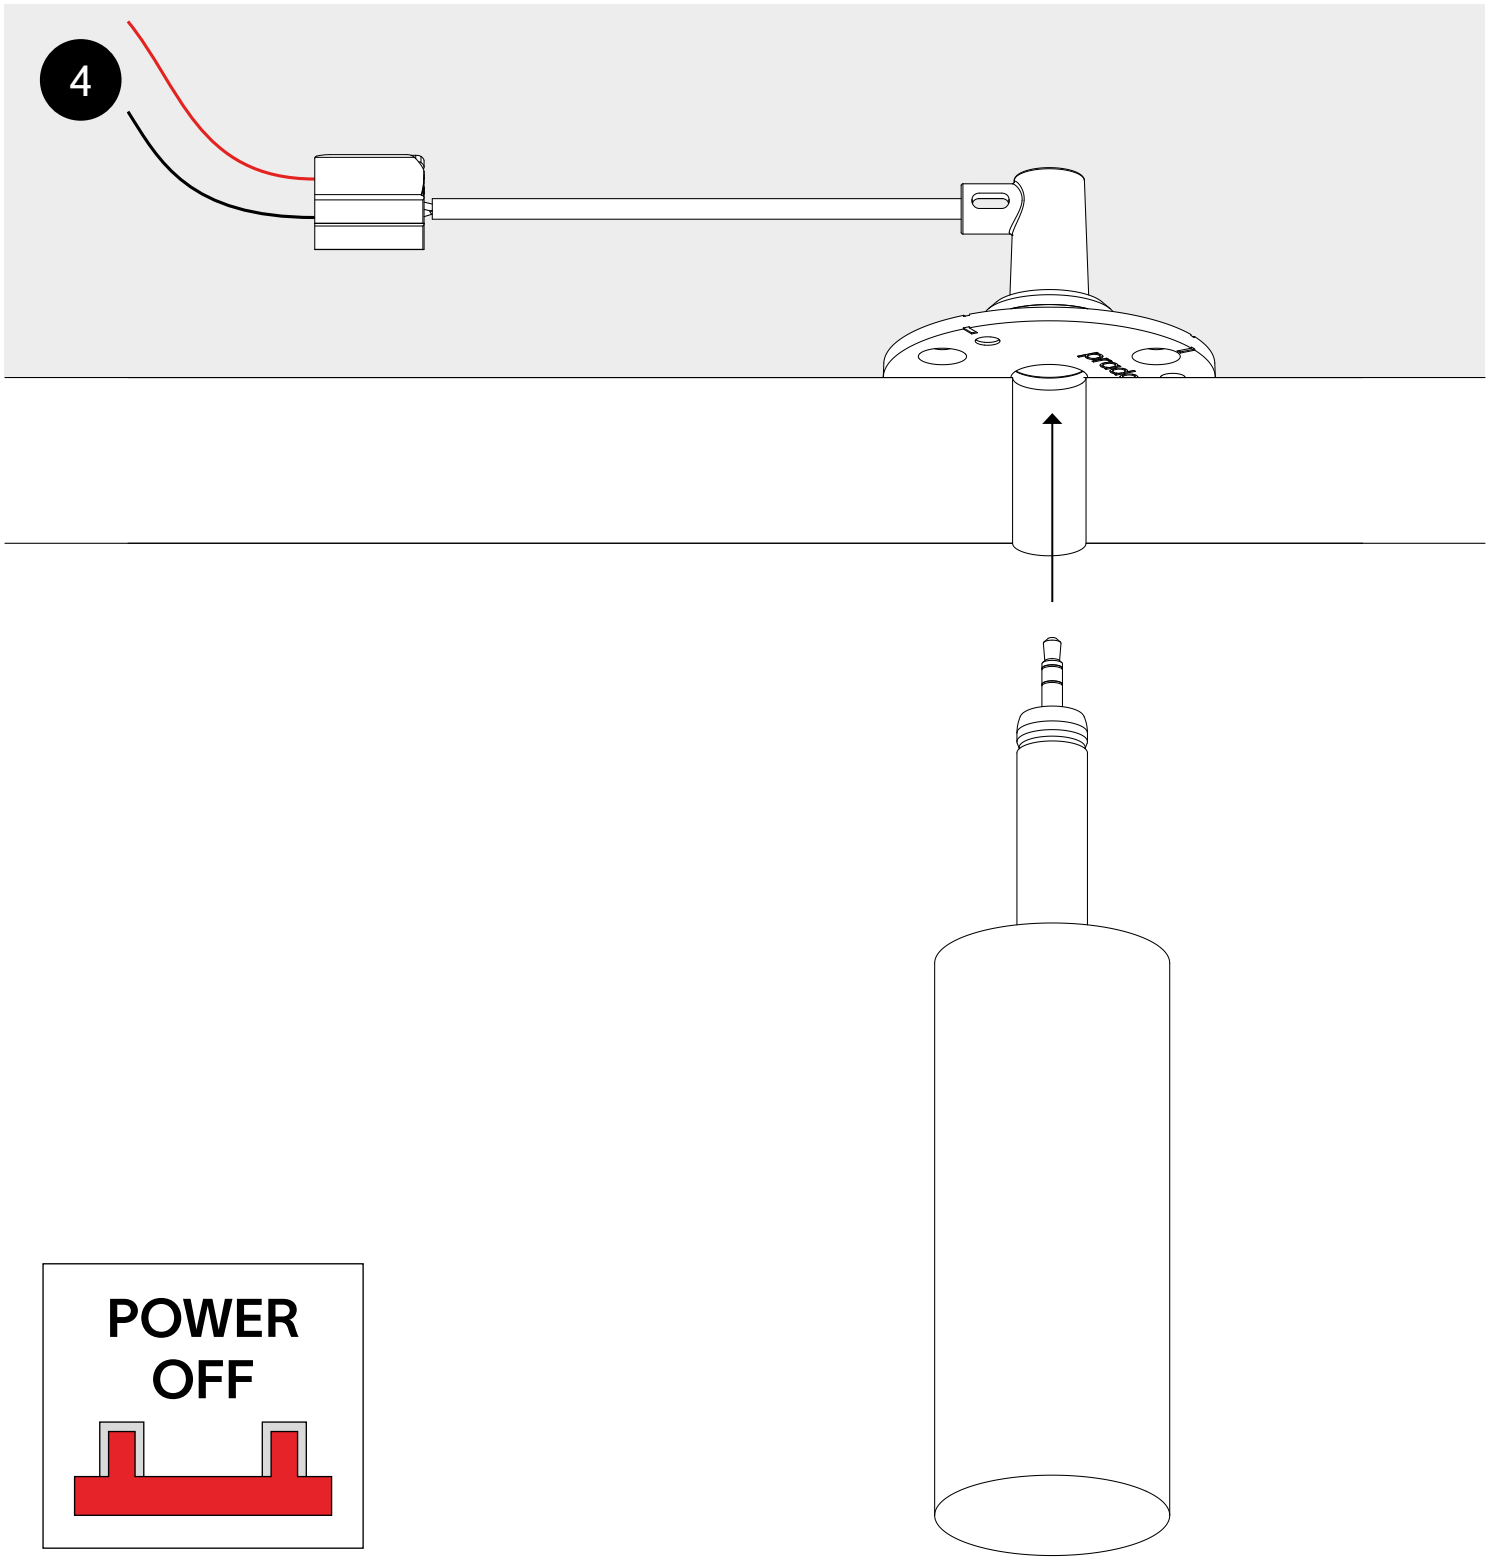
4
POWER
OFF

We advise to test the electrical connection before starting to plaster.

Important installation note - prevent LED glow.
To avoid unwanted LED glow, do not run AC cables alongside the DC cables coming from the LED driver. This can cause residual voltage, resulting in faintly glowing LEDs.

Note: Once the plaster ring jack is installed, it is no longer possible to add the capacitor. Be sure to install it during the initial wiring phase.

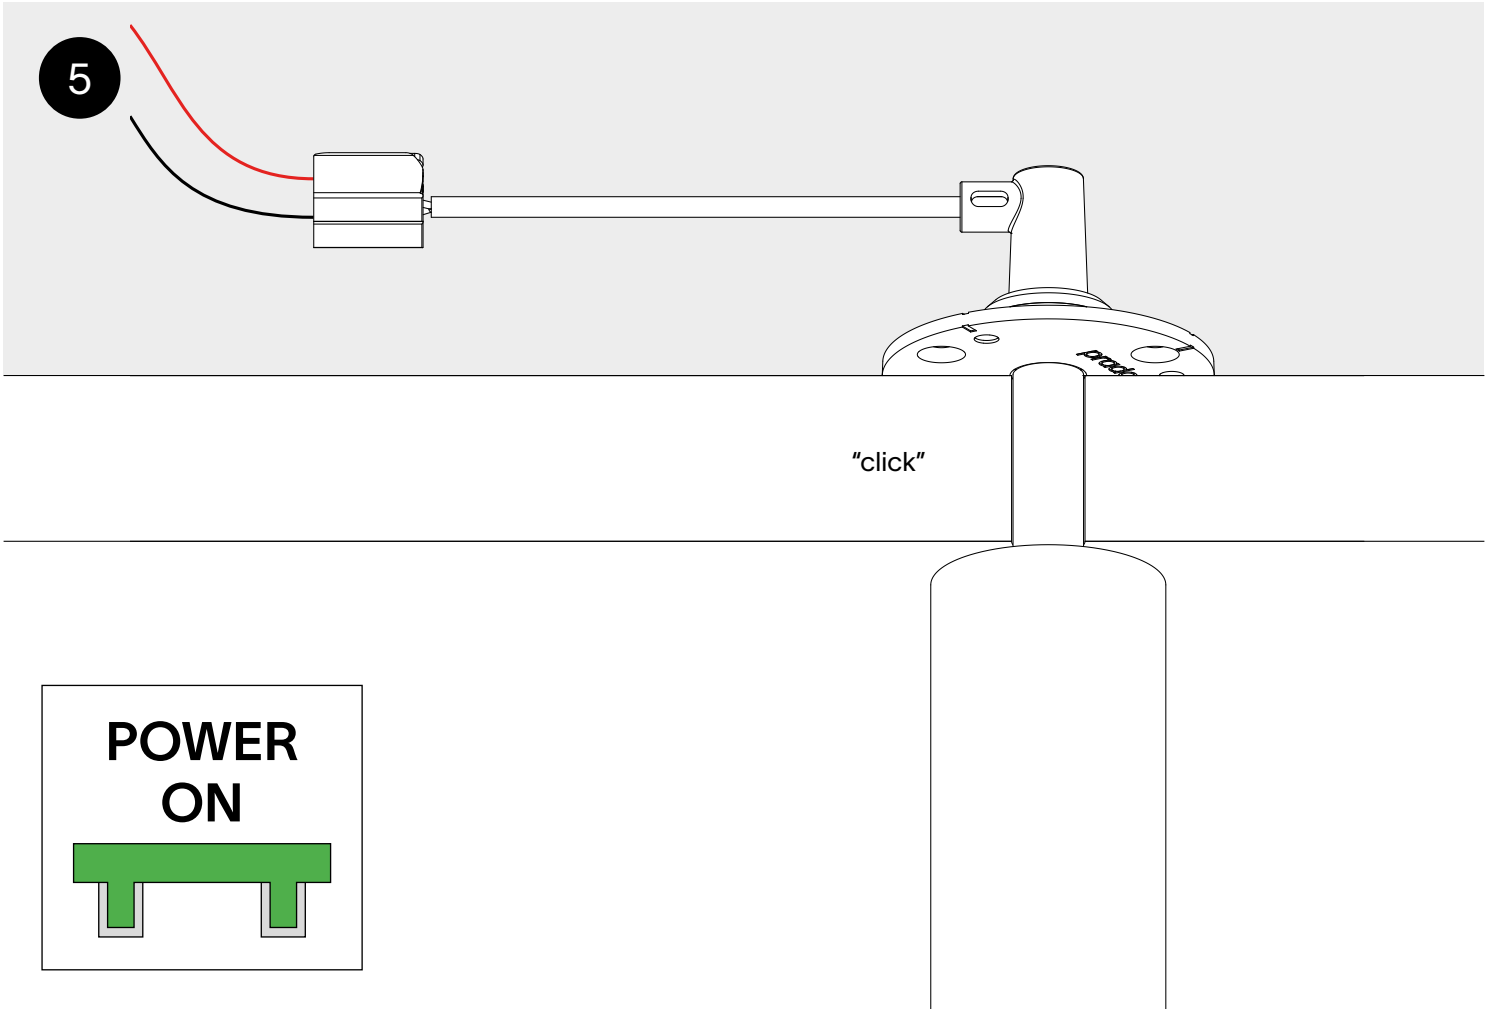

Turn the power on after plugging in the fixture.

UL CERTIFIED
SAFETY US-CA
E543420

thank you for choosing prado

prado.com

Installation must be done by skilled professionals only and instructions must be followed at all times. Warranty will not apply in case of wrongful use or if unskilled personnel attempts to repair a product.