


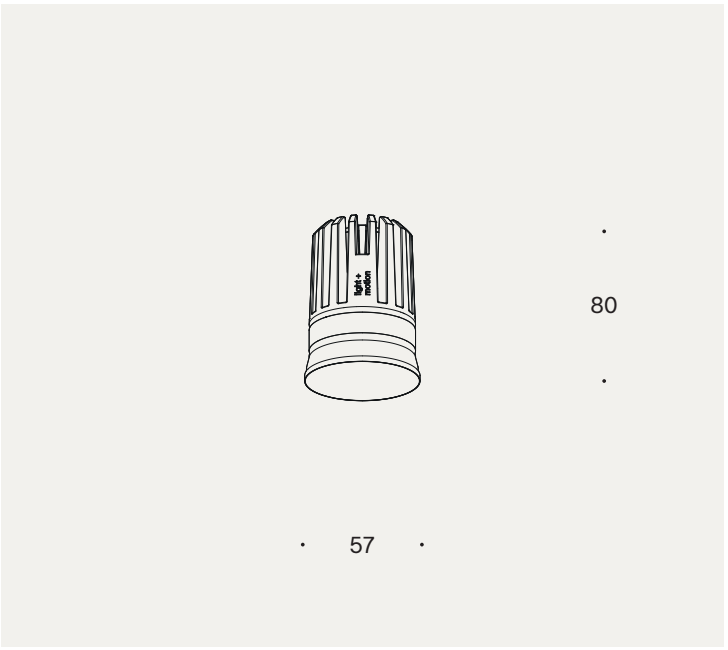

light + motion trimless 2.0

installation

light specs

lamp	LED
optic	diffuser
driver	excluded
IP	20
CRI	90+
SDCM	SDCM2
class	class III
recess height	80
location	indoor
marking	CE

motion specs

motion detector	passive infrared sensor (PIR)
detection angle	h360 v100
light sensor	integrated
time on	5min after last movement detection
other	potential-free relay integrated
	patent pending

luminaire output

	2700K	3000K
48V - 8.2W black ano	550lm	550lm
48V - 8.2W white struc	700lm	700lm

accessories

	installation
plaster ring Ø57	8000-0003
adjustable thick plaster ring Ø57 (12-33mm)	8000-0103
adjustable thin plaster ring Ø57 (3.6-20mm)	8000-0123
clt csc ring Ø57	8000-0013
concrete ring + cap Ø57	8000-0113
	drivers
48V driver 15W constant voltage	8000-0029
48V driver 70W constant voltage	8000-0024
48V driver 150W constant voltage	8000-0025
48V driver 240V constant voltage	8000-0033

© Prado Europe bv

We reserve the right, without notice, to change technical details if these, in our opinion do not change appearance or function of the product.