prado


light only + motion | trim short 2.0
installation instruction

1




Cut a round hole (Ø 132 h 85).

2

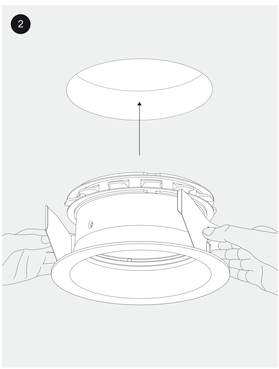


Insert the holder.

3

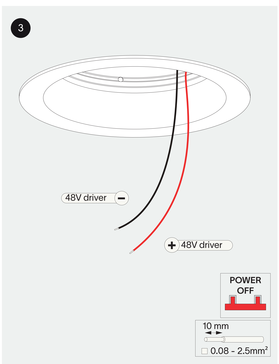

Turn the power off.

4

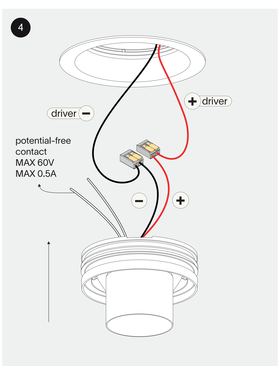


Connect the wires with the included connectors for parallel connection, respect polarity.
Combine with prado LED-drive.

5 minutes after the last detection (taking into account ambient light) the luminaire will automatically switch off. These are default settings and cannot be adjusted.

The potential-free contact closes when the luminaite turns on.

5



Twist the luminaire as desired.
thank you for choosing prado

prado.com

The light source or electronics in this fixture shall only be replaced by the manufacturer. Warranty will not apply in case of wrongful use or if unskilled personnel attempts to repair the product.