acrobat micro | long

We aim to create cleaner ceilings.
Show what you want, hide what you need.



© Prado Europe bv
We reserve the right to change technical details without notice if the product's appearance or functionality is unaffected.

luminaire specs 3

finishes 4


luminaire output 5

accessories & drivers 7

installation rings 8

© Prado Europe bv We reserve the right to change technical details without notice if the product's appearance or functionality is unaffected.



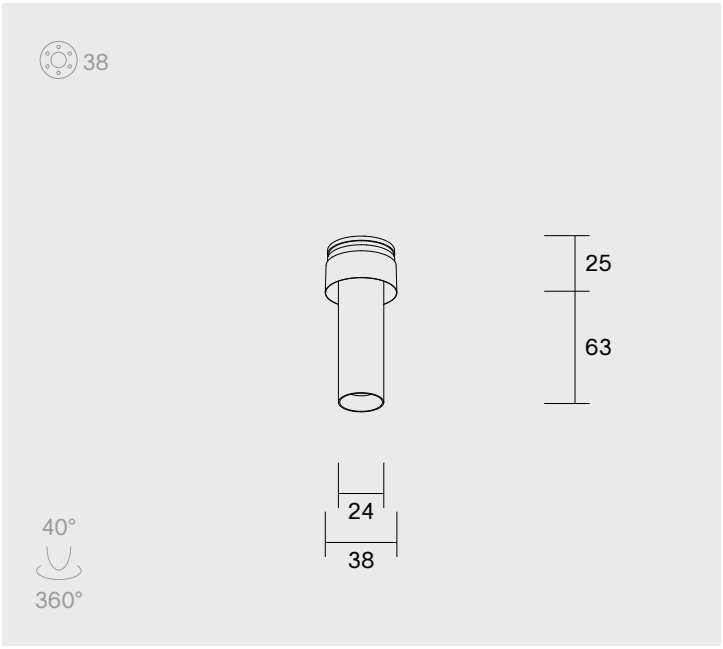

acrobat micro | long

installation

luminaire specs

delivered lumen	up to 275lm	
watts	up to 4.5W	
efficacy	up to 62lm/W	
lamp	LED	
optics	10° pc	30° pc 50° pc
driver	excluded	
IP	IP20	
CRI/Ra	CRI 97	
R9 value	CRI 97: >91	
color temperature (CCT)	2700K	3000K
color consistency	SDCM2	
class	III	
recess height	25 mm	
installation depth	driver remote	
	consult installation ring depth →	
adjustability	rotation 360°	tilt 40°
location	indoor	
energy class	F	
marking	CE	
L80	>55000 h	

installation rings (not incl.)	plaster ring Ø38 ↗	
	adj. thin plaster ring Ø38 ↗	
	clt csc ring Ø38 ↗	
aluminum finishes	black ano	white struc
	brushed steel	brushed grey
	brushed bronze	
aluminum weight	0.14 kg	
brass finishes	brushed nickel	light bronze
	dark bronze	canon de fusil dark
	canon de fusil light	
brass weight	0.16 kg	
warranty	2 years (5 years on LED) ↗	

Respect distances, cable sections and IP ratings.
Split AC and DC to prevent LED glowing.

© Prado Europe bv
We reserve the right to change technical details without notice if the product's appearance or functionality is unaffected.

finishes

aluminum finishes

white struc (RAL 9003)



brushed steel



brushed bronze



brushed grey



black ano



brass finishes

brushed nickel



light bronze



dark bronze



canon de fusil light




canon de fusil dark




Custom RAL and brass finishes available on request.

correlated color temperature (CCT)

2700K: extra warm white



3000K: warm white




max. mA

	10° pc	30° pc	50° pc
aluminum	1400mA max	1400mA max	1400mA max
brass	1400mA max	1400mA max	1400mA max


luminaire output

		1050mA	1400mA
		(3.4W, 3.2Vf)	(4.5W, 3.2Vf)
2700K	10° pc	200lm	225lm
	30° pc	200lm	225lm
	50° pc	200lm	225lm
3000K	10° pc	225lm	275lm
	30° pc	225lm	275lm
	50° pc	225lm	275lm


© Prado Europe bv We reserve the right to change technical details without notice if the product's appearance or functionality is unaffected.

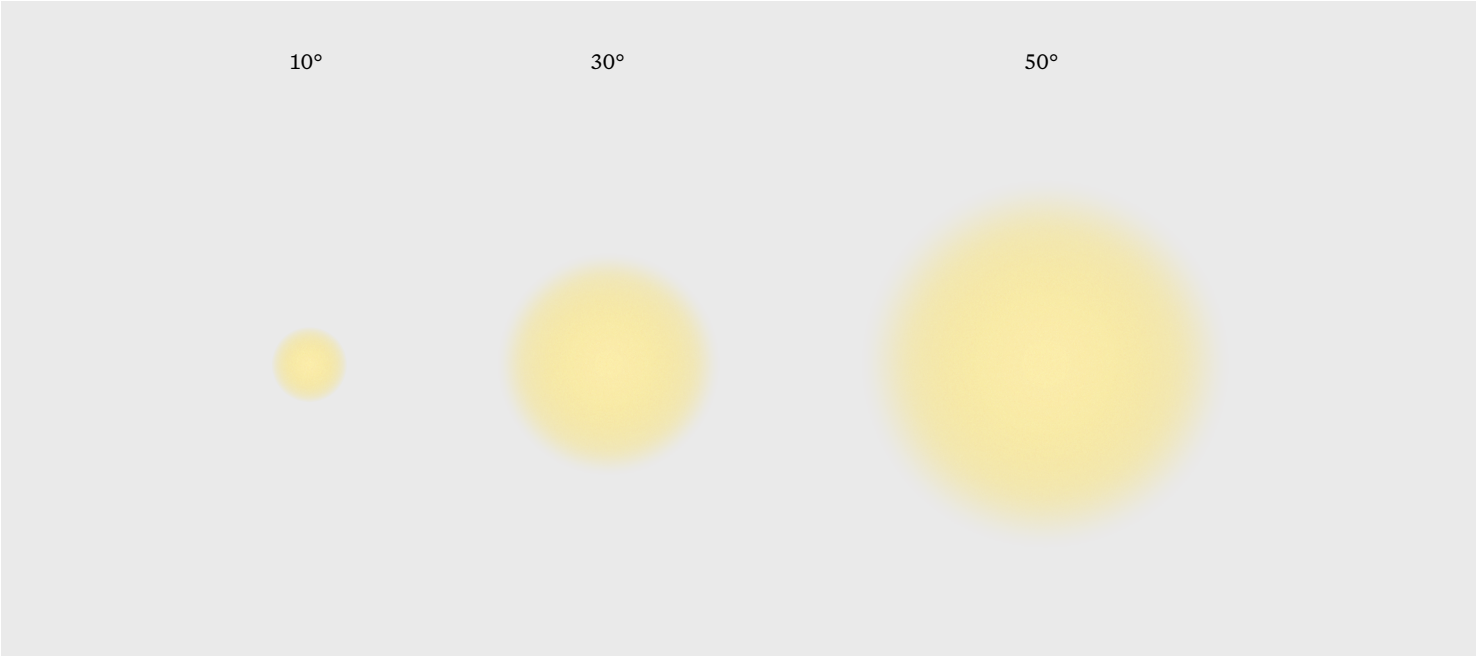


10° pc

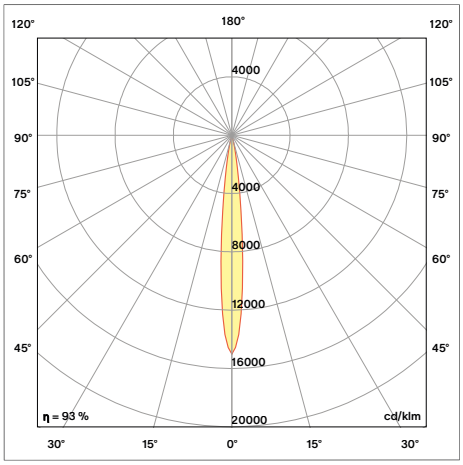

30° pc

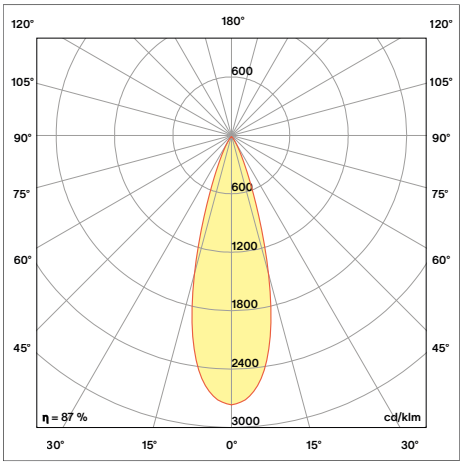

50° pc

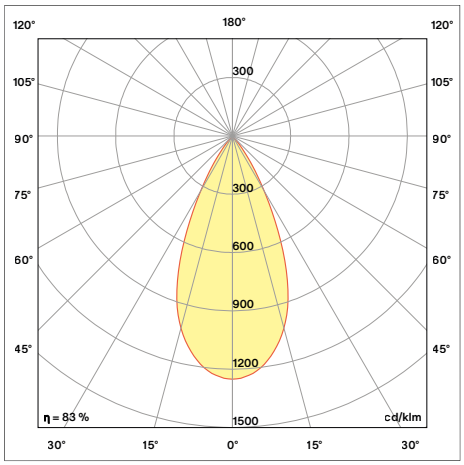

accessories

trimless installation rings (not incl.)

	application	drill hole	product code	spec sheet
plaster ring Ø38	plastered ceiling	Ø76 mm	8000-0004	↗
adj. thin plaster ring Ø38 (3.6 - 20 mm)	plastered ceiling	Ø76 mm	8000-0124	↗
clt csc ring Ø38 (before claring ceiling)	CLT / CSC	consult installation	8000-0014	↗

drivers (not incl.)


	number of fixtures	IP rating	product code	installation
DALI / push dimmable driver 52W for micro long - 1400mA	1-10 fx	IP20	8000-0063	remote only

driver matrix

trimless installation rings (not incl.)

	application	drill hole	product code	spec sheet
plaster ring Ø38	plastered ceiling	Ø76 mm	8000-0004	↗
adj. thin plaster ring Ø38 (3.6 - 20 mm)	plastered ceiling	Ø76 mm	8000-0124	↗
clt csc ring Ø38 (before claring ceiling)	CLT / CSC	consult installation	8000-0014	↗


plastered ceiling

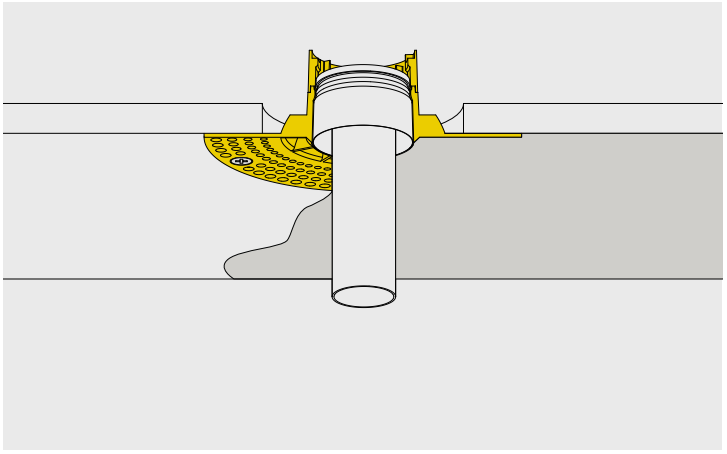

plaster ring Ø38

installation

location	ceiling indoor	
plaster thickness	3.6 mm	
drill hole	Ø76 mm	
installation depth	38 mm	
trimless tool (not incl.)	Ø38 / Ø57 / jack	8000-0098

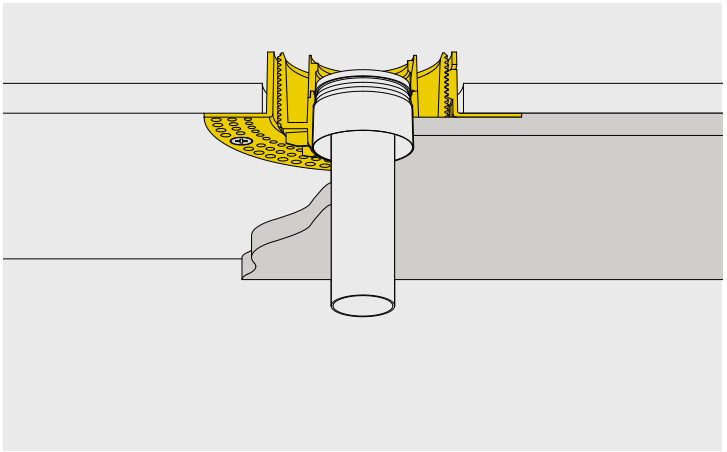


adj. thin plaster ring Ø38

installation

location	ceiling indoor	
plaster thickness	min. 3.6 mm	max. 20 mm
drill hole	Ø76 mm	
installation depth	38 mm	
trimless tool (not incl.)	Ø38 / Ø57 / jack	8000-0098

© Prado Europe bv We reserve the right to change technical details without notice if the product's appearance or functionality is unaffected.

clt csc ceiling

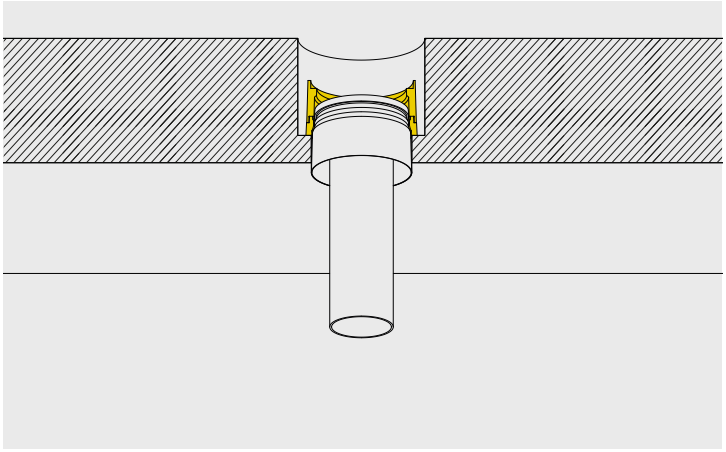

installation clt


installation csc

clt csc ring Ø38

location	ceiling indoor
cut-out	consult installation


free air dimensions (l x w)

	remote driver
1050mA	150 x 150 mm
1400mA	200 x 200 mm

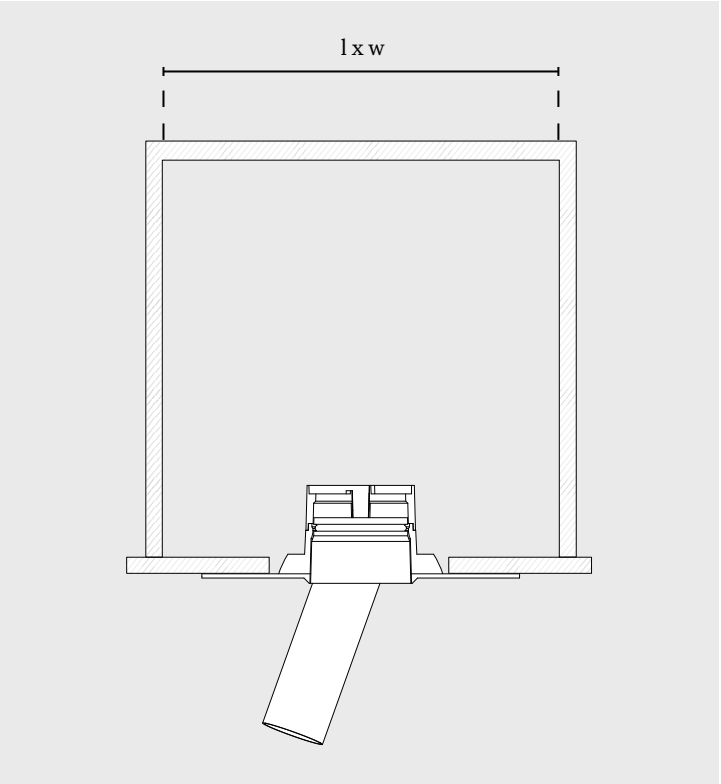

wiring diagram

serial connection

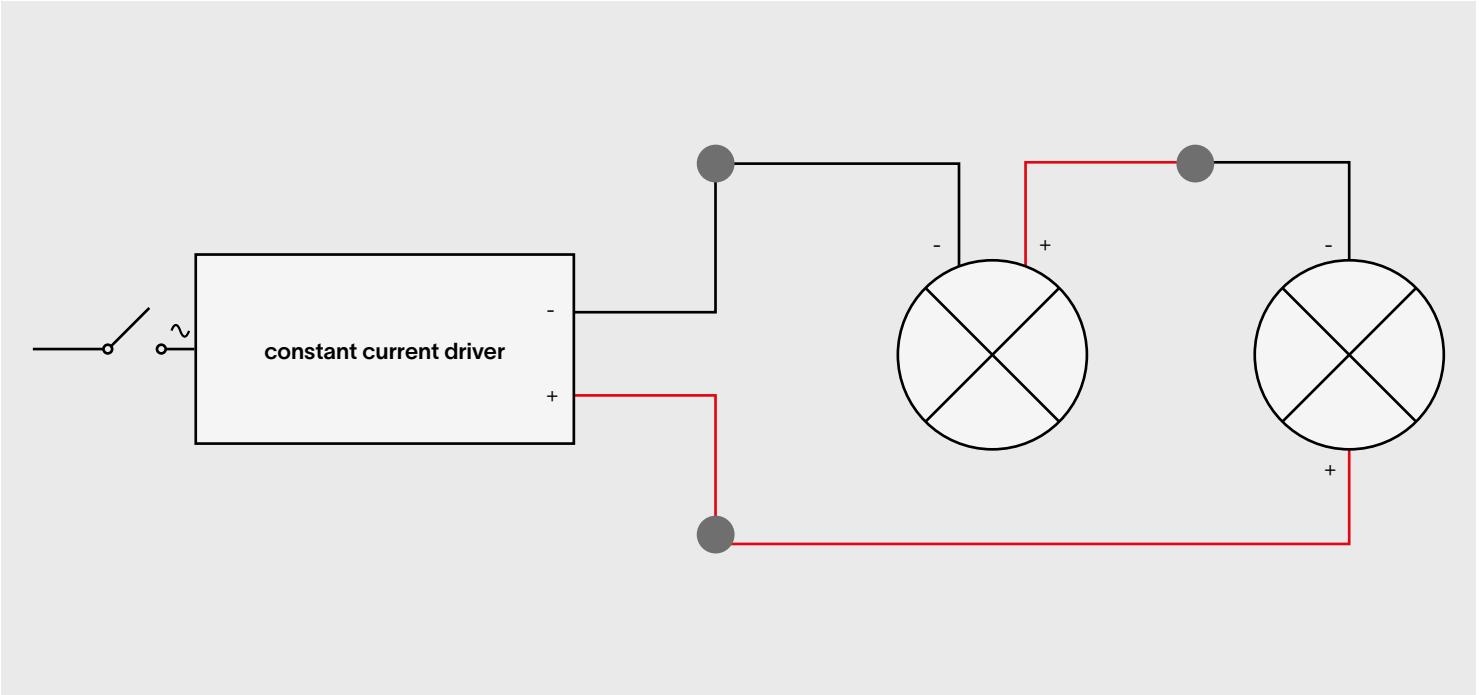

driver connections

© Prado Europe bv We reserve the right to change technical details without notice if the product's appearance or functionality is unaffected.