acrobat micro | trim long

We aim to create cleaner ceilings.
Show what you want, hide what you need.



© Prado Europe bv
We reserve the right to change technical details without notice if the product's appearance or functionality is unaffected.

luminaire specs 3

finishes 4


luminaire output 5

drivers 7

fixation 7

© Prado Europe bv We reserve the right to change technical details without notice if the product's appearance or functionality is unaffected.



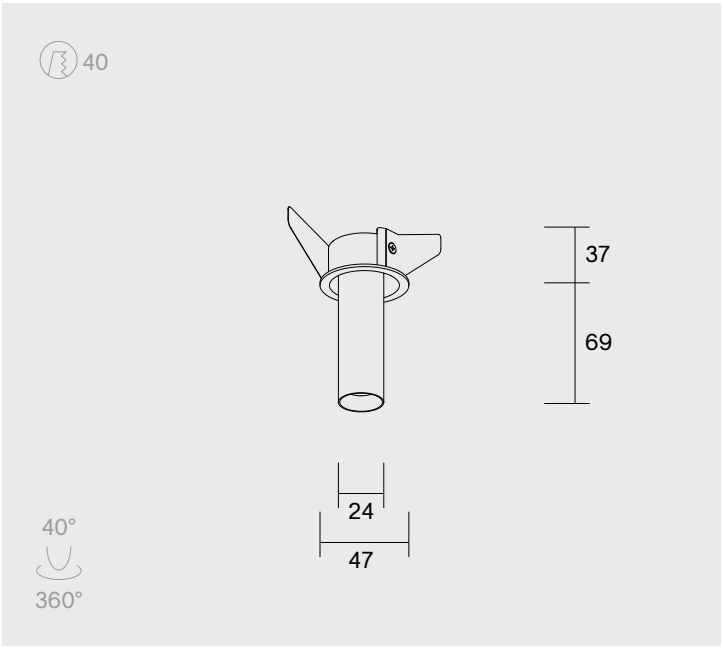

acrobat micro | trim long

installation

luminaire specs

delivered lumen	up to 275lm		
watts	up to 4.5W		
efficacy	up to 62lm/W		
lamp	LED		
optics	10° pc	30° pc	50° pc
driver	excluded		
IP	IP20		
CRI/Ra	CRI 97		
R9 value	CRI 97: >91		
color temperature (CCT)	2700K		3000K
color consistency	SDCM2		
class	III		
drill hole size	Ø40 mm		
ceiling thickness	min. 2 mm		max. 24 mm
recess height	37 mm		
installation depth	driver remote: 37 mm		
adjustability	rotation 360°		tilt 40°
location	indoor		
energy class	F		
marking	CE		
L80	>55000 h		

fixation	single springs	→
	double springs	→
aluminum finishes	black ano	white struc
	brushed steel	brushed grey
	brushed bronze	
aluminum weight	0.15 kg	
brass finishes	brushed nickel	light bronze
	dark bronze	canon de fusil dark
	canon de fusil light	
brass weight	0.26 kg	
warranty	2 years (5 years on LED)	↗

Respect distances, cable sections and IP ratings.
Split AC and DC to prevent LED glowing.

© Prado Europe bv
We reserve the right to change technical details without notice if the product's appearance or functionality is unaffected.

finishes

aluminum finishes

white struc (RAL 9003)



brushed steel



brushed bronze



brushed grey



black ano



brass finishes

brushed nickel



light bronze



dark bronze



canon de fusil light




canon de fusil dark




Custom RAL and brass finishes available on request.

correlated color temperature (CCT)

2700K: extra warm white



3000K: warm white



© Prado Europe bv

We reserve the right to change technical details without notice if the product's appearance or functionality is unaffected.


max. mA

	10° pc	30° pc	50° pc
aluminum	1400mA max	1400mA max	1400mA max
brass	1400mA max	1400mA max	1400mA max


luminaire output

		1050mA	1400mA
		(3.4W, 3.2Vf)	(4.5W, 3.2Vf)
2700K	10° pc	200lm	225lm
	30° pc	200lm	225lm
	50° pc	200lm	225lm
3000K	10° pc	225lm	275lm
	30° pc	225lm	275lm
	50° pc	225lm	275lm


© Prado Europe bv We reserve the right to change technical details without notice if the product's appearance or functionality is unaffected.

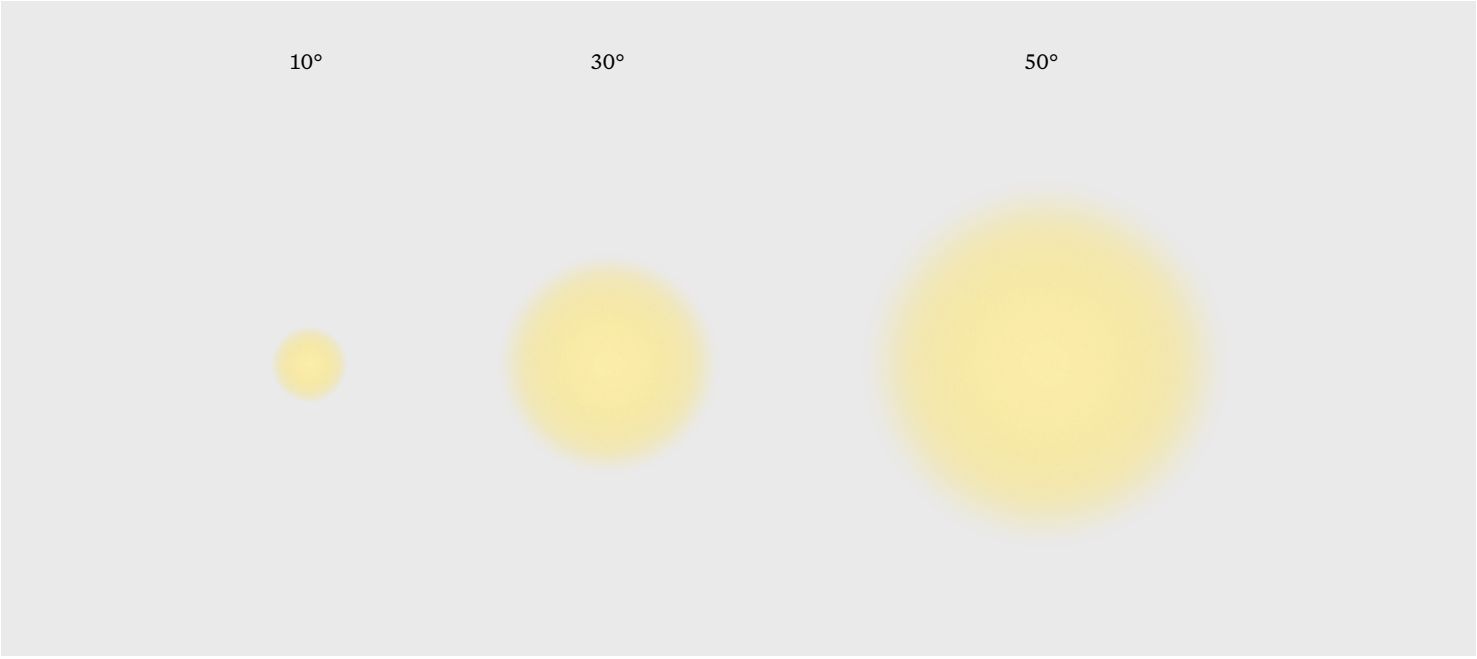


10° pc

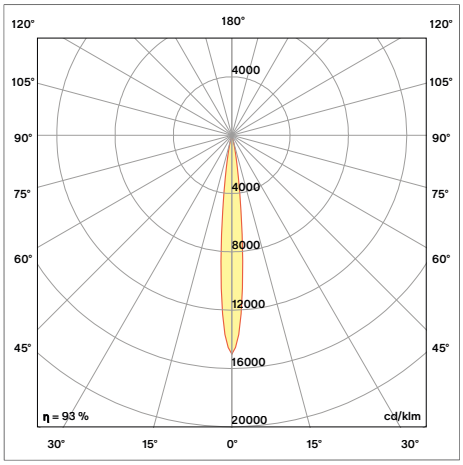

30° pc

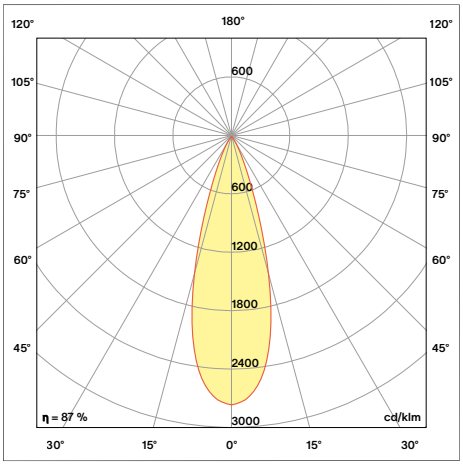

50° pc

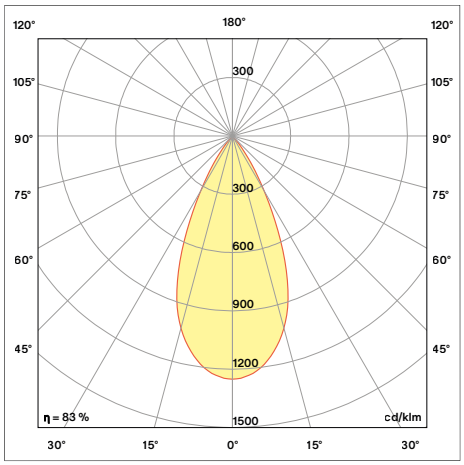


drivers (not incl.)	number of fixtures	IP rating	product code	installation
DALI / push dimmable driver 52W for micro long - 1400mA	1-10 fx	IP20	8000-0063	remote only


driver matrix

fixation

	product code	ceiling thickness
single springs micro - 10 pack (5 sets)	8001-9691	min. 2 mm - max. 24 mm
double springs micro - 10 pack (5 sets)	8001-9692	min. 24 mm


use a Phillips screwdriver to replace the springs

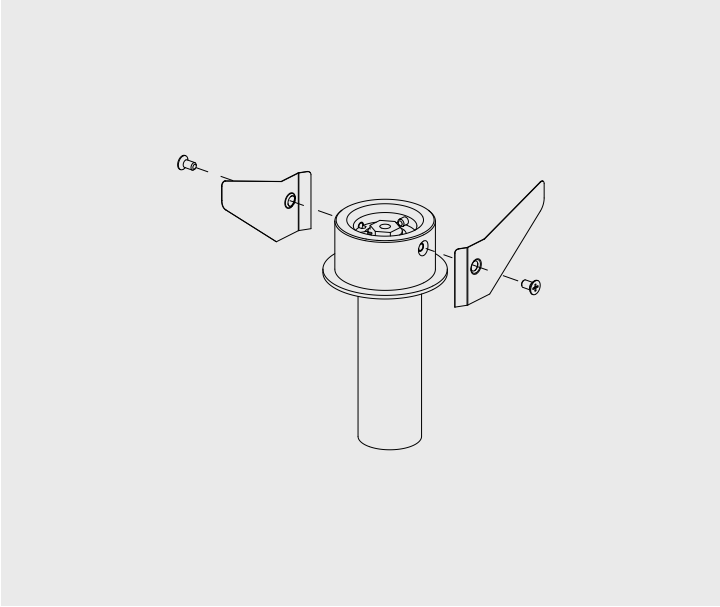

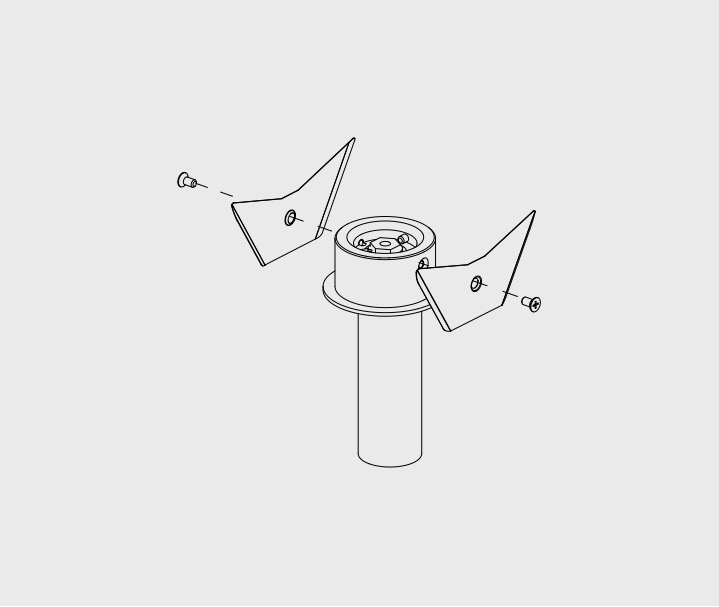


free air dimensions (l x w)

	remote driver
1050mA	150 x 150 mm
1400mA	200 x 200 mm

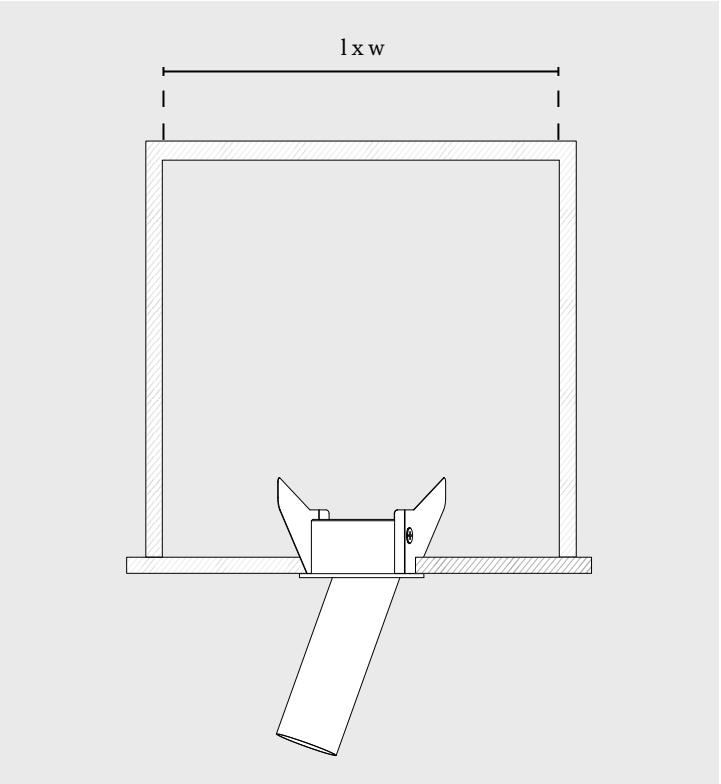

wiring diagram

serial connection

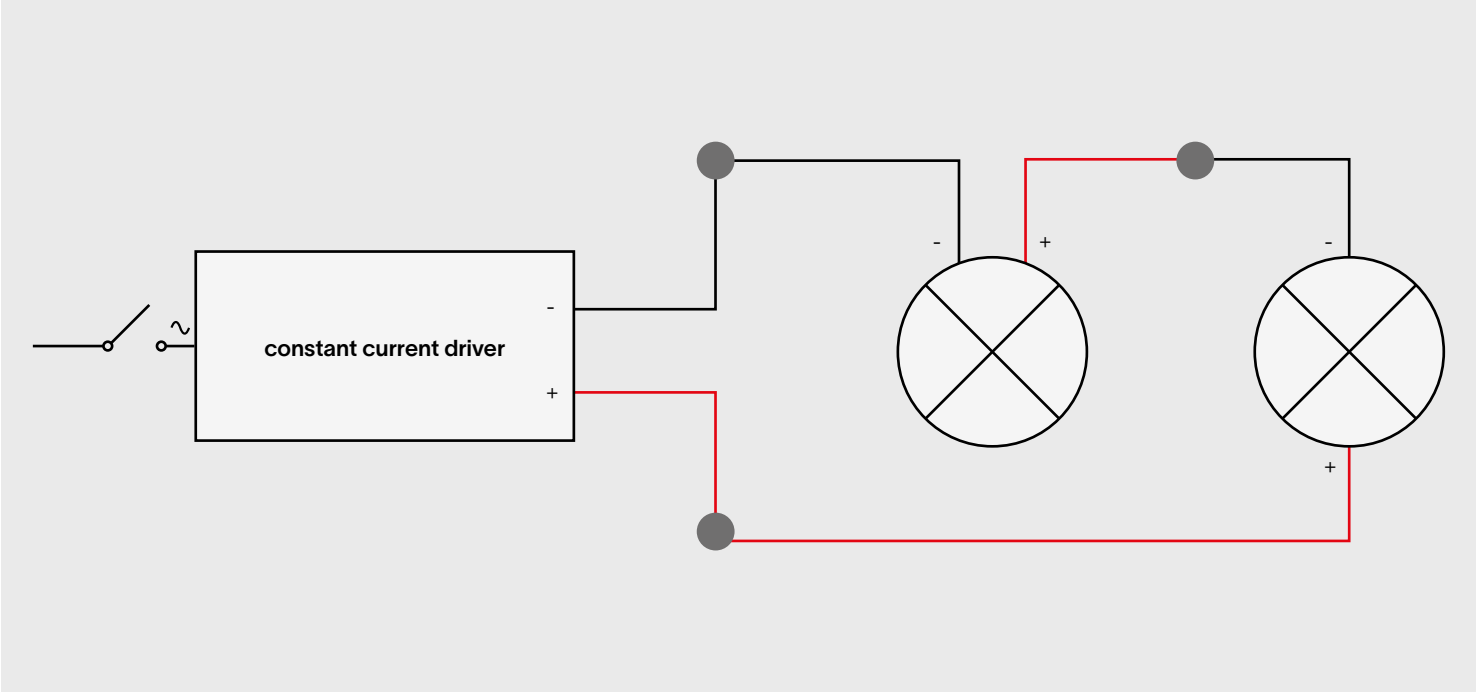

driver connections