


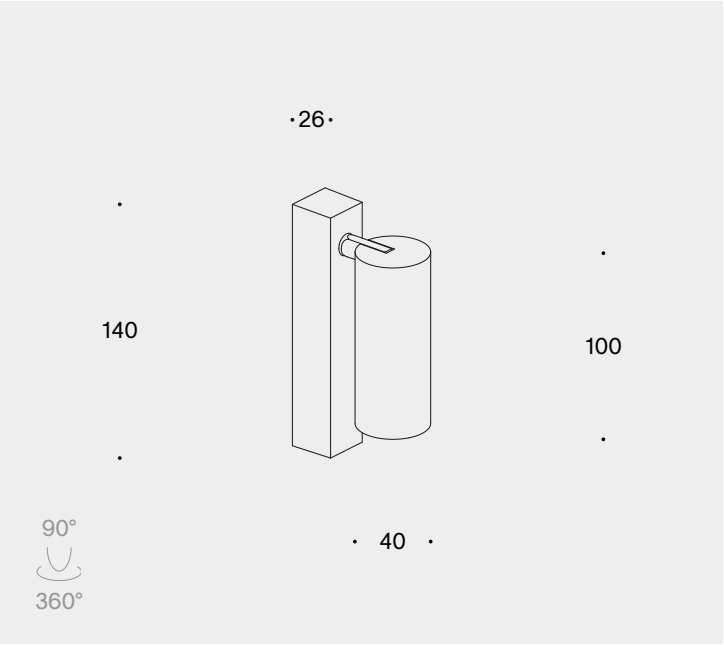

acrobat outdoor | surface box single

installation

light specs

lamp	LED
optic	glass lens
driver	excluded
IP	IP65
CRI	90+
SDCM	SDCM2
class	class III
tilt	90°
ceiling base dimensions	140 x 26 x 27 (l x w x h)
location	outdoor
marking	CE

luminaire output

	40° glass	
	2700K	3000K
350mA (6.0W, 17.1Vf)	475lm	500lm
500mA (8.9W, 17.8Vf)	650lm	675lm
700mA (13.0W, 18.6Vf)	850lm	900lm

accessories

	drivers - cv
IP68 24V constant voltage dali pwm driver 60W	8000-0040
IP68 24V constant voltage dali pwm driver 120W	8000-0041
IP68 24V constant voltage dali pwm push driver 200W	8000-0042
	drivers - cc
IP68 dali dimmable driver 38W cc 350mA	8000-0050
IP68 dali dimmable driver 38W cc 500mA	8000-0039
IP68 dali dimmable driver 38W cc 700mA	8000-0051
IP68 non-dimmable driver IPR2 17W cc 350mA	8000-0054
IP68 non-dimmable driver IPR2 24W cc 500mA	8000-0055
IP68 non-dimmable driver IPR2 30W cc 700mA	8000-0056
IP68 DC mini jolly 1-10V dim. driver IPR2 16W 350mA	8000-0057
IP68 DC mini jolly 1-10V dim. driver IPR2 20W 500mA	8000-0058
IP68 DC mini jolly 1-10V dim. driver IPR2 17W 700mA	8000-0059

© Prado Europe bv We reserve the right, without notice, to change technical details if these, in our opinion do not change appearance or function of the product.