

acrobat outdoor | surface box
installation instruction

acrobat outdoor | surface box single




ceiling



wall


acrobat outdoor | surface box double





ceiling

The installation is the same for both the single and double version, as well as for mounting on a wall or ceiling.

1

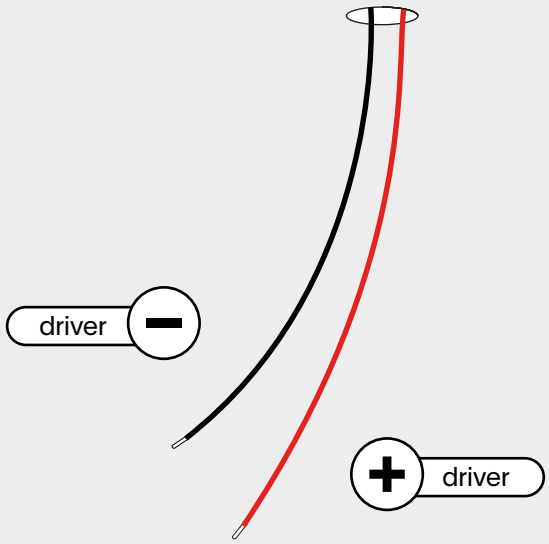





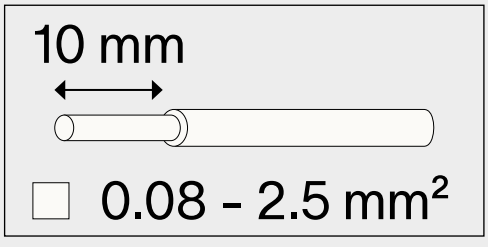

Turn the power off.


2

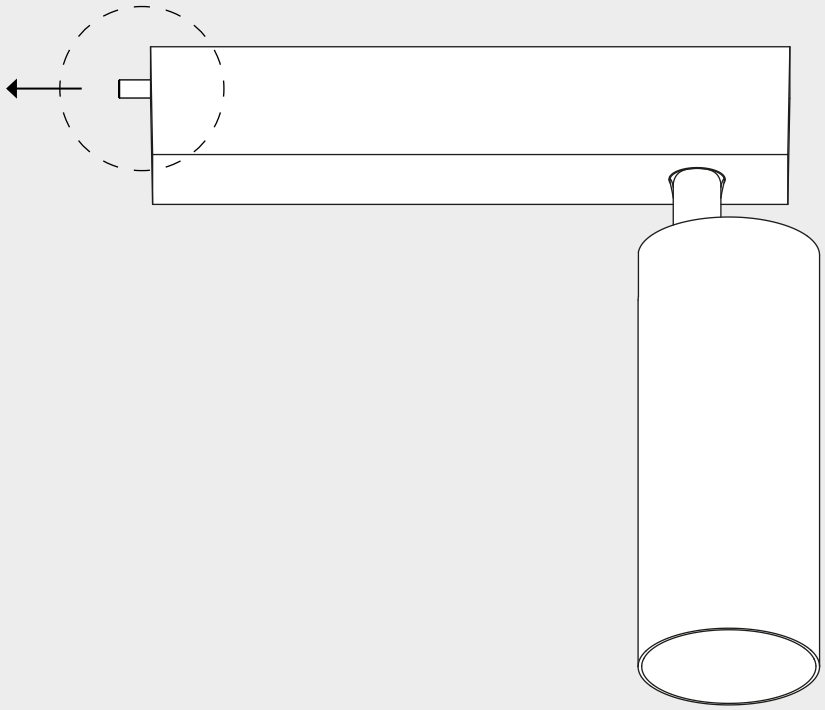

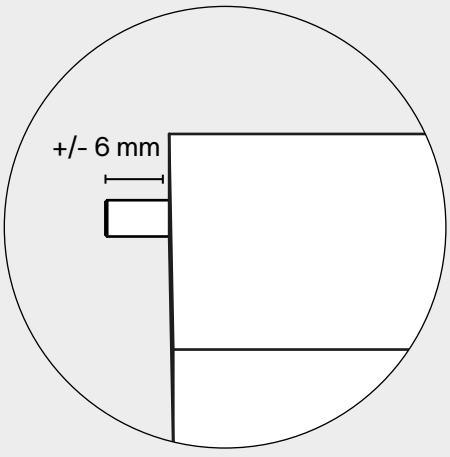


Partially loosen the screw on the side of the fixture.

3

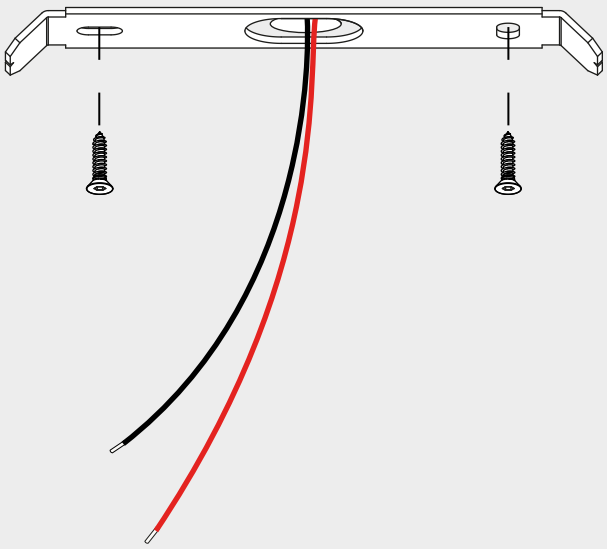


Fixate the mounting plate on the surface with the appropriate screws on a screwfast surface.

4

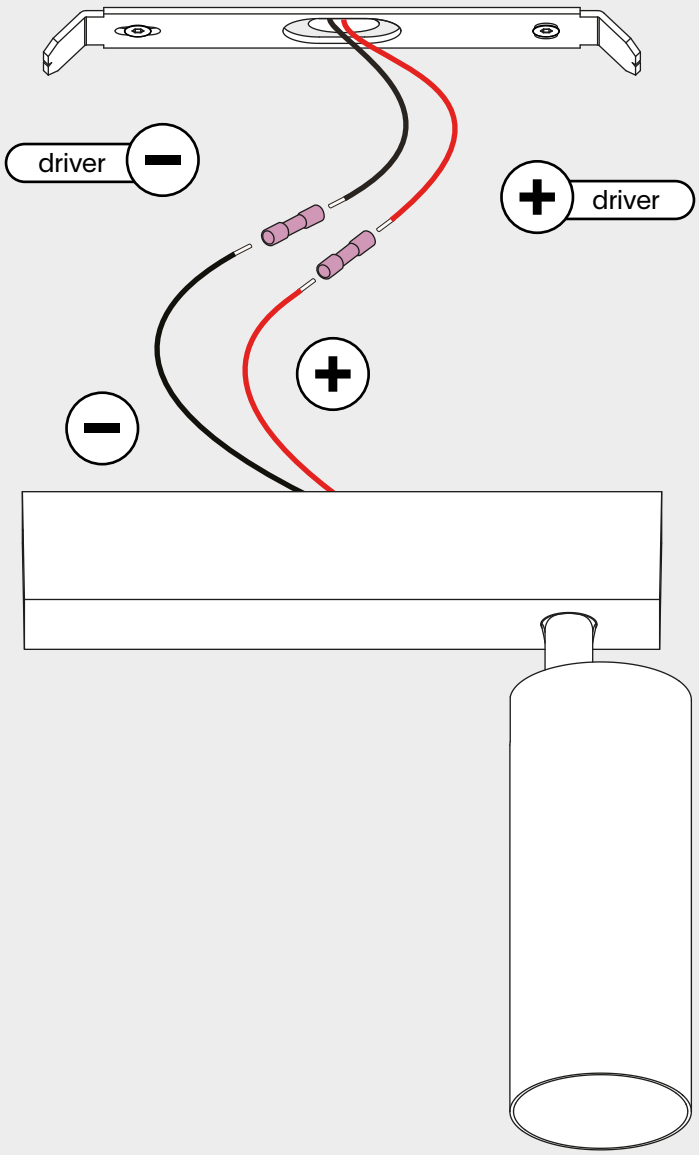


Connect the wires using waterproof connectors. For serial connection, respect polarity. Combine with a prado LED-driver.

single / double

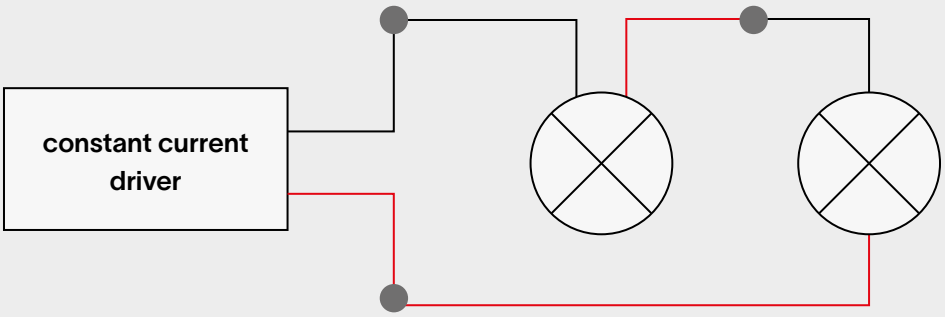

single

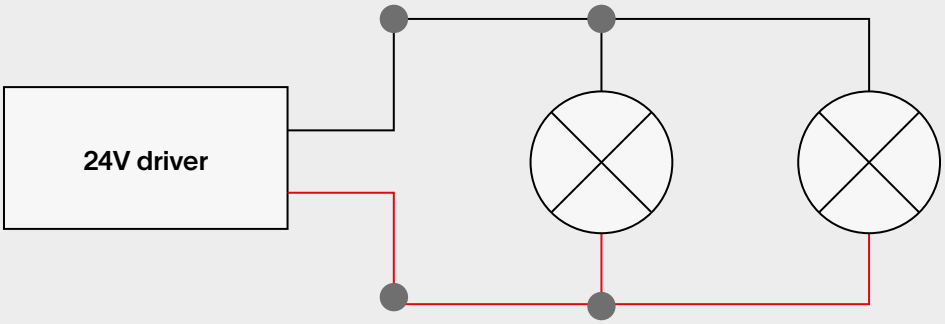

Combine with prado LED-driver, respect polarity:

- for constant current: serial connection (single or double)
- for 24V driver: parallel connection (single only)


The installer is responsible for using the correct wire section and must consider the max. cable length to ensure safe and efficient system operation. Incorrect wire choice can lead to overheating, voltage drop, and equipment damage.


Important note for the installer

Ensure the external electrical connection for this fixture is waterproof. It is the installer’s responsibility to use materials and techniques that meet IP standards and prevent water ingress. Failure to waterproof the connection may lead to fixture damage, electric shock, or short circuits.

Any risks or damages from improper waterproofing are the installer’s responsibility. We strongly recommend using appropriate waterproofing materials for the installation environment.


5

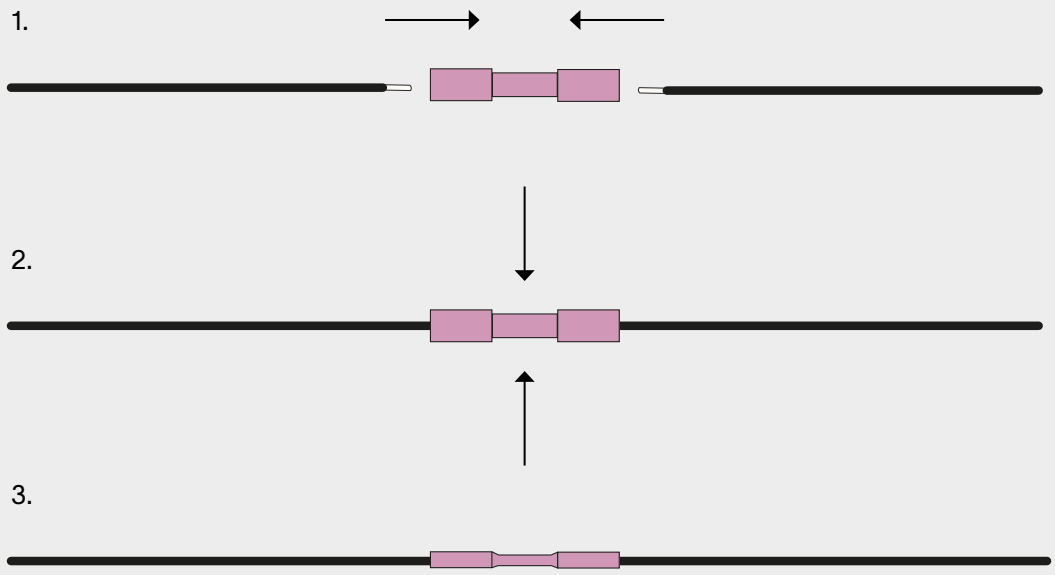

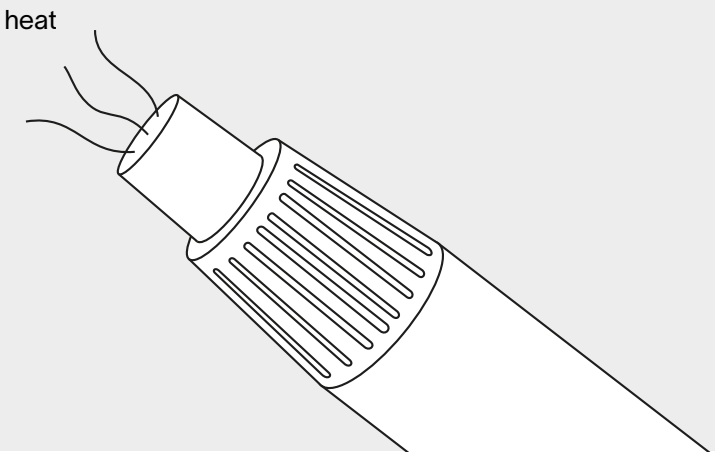


1. Insert the wires into the connector
2. Compress the middle part
3. Seal with a heater

6

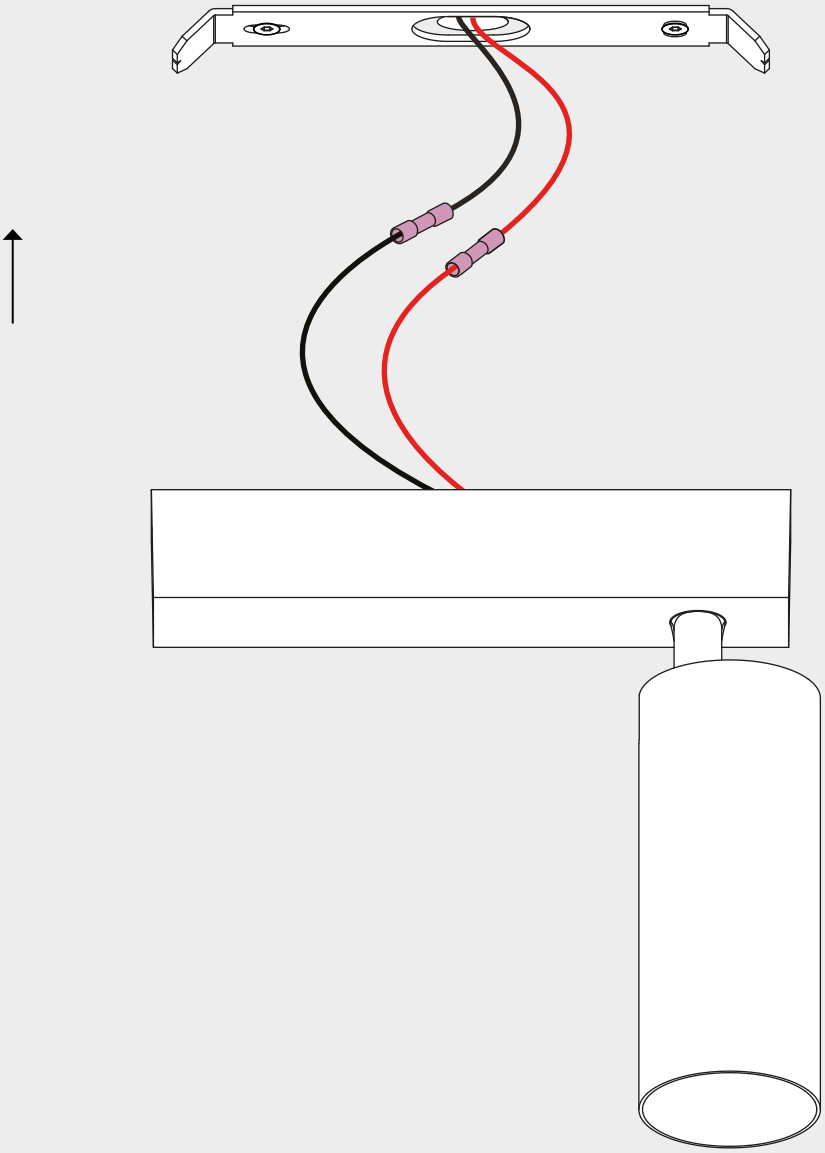


Position the fixture onto the mounting plate ...


7

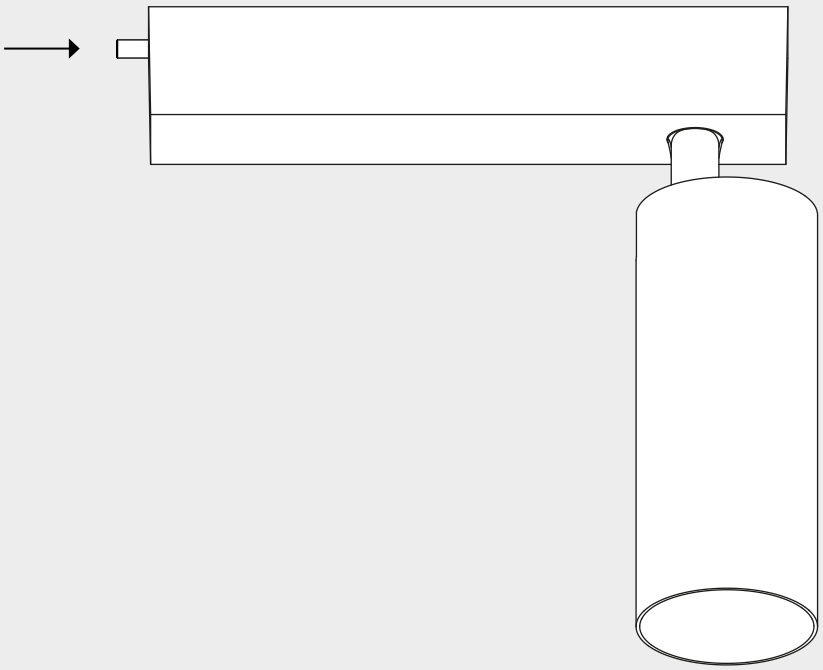

... and fixate it by screwing in the screw completely.

7

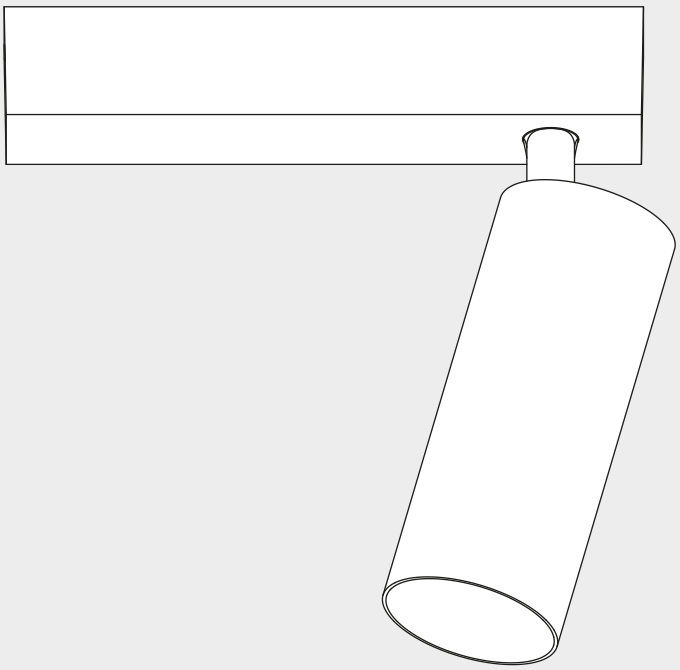





Tilt the luminaire as desired. Turn the power back on.



To prevent overheating, do not light the fixture in the sunlight.

thank you for choosing prado





Replace glass lense when broken.
Luminaire shall only be used together with glass lens.

prado.com

Installation must be done by skilled professionals only and instructions must be followed at all times. Warranty will not apply in case of wrongful use or if unskilled personnel attempts to repair a product.