


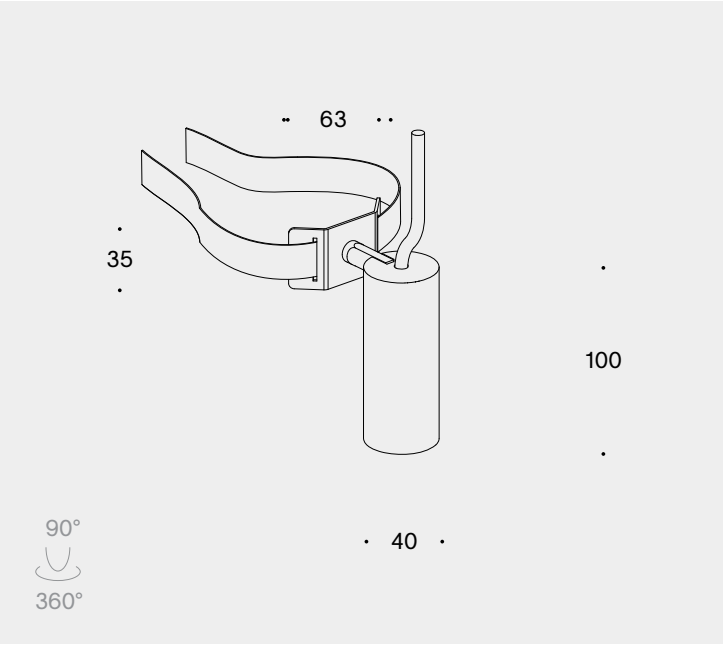


# acrobat outdoor | tree strap

installation

## light specs

| | | |
|---|---|---|
| lamp | LED | |
| optic | glass lens | |
| driver | excluded | |
| IP | IP65 | |
| CRI | 90+ | |
| SDCM | SDCM2 | |
| class | class III | |
| tree trunk diameter | min. 10 cm | max. 30 cm |
| tilt | 90° | |
| location | outdoor | |
| comes with | 2m H07 cable | |
| marking | CE | |

## accessories

| | drivers |
|---|---|
| IP68 non dimmable driver 42W constant current 500mA | 8000-0038 |
| IP68 dali dimmable driver 38W constant current 500mA | 8000-0039 |
| IP68 24V Constant Voltage DALI PWM driver 60W | 8000-0040 |
| IP68 24V Constant Voltage DALI PWM driver 120W | 8000-0041 |
| IP68 24V Constant Voltage DALI PWM PUSH driver 200W | 8000-0042 |
| DALI dimmable driver 38W | 8000-0021 |
| 0-10V dimmable driver 36W | 8000-0022 |
| non-dimmable driver 42W | 8000-0023 |
| DALI dimmable driver 60W | 8000-0026 |

## luminaire output

| | 40° | |
|---|---|---|
| | 2700K | 3000K |
| 350mA (5.7W) | 525lm | 550lm |
| 500mA (8.5W) | 710lm | 750lm |
| 700mA (12.8W) | 950lm | 1000lm |

© Prado Europe bv

We reserve the right, without notice, to change technical details if these, in our opinion do not change appearance or function of the product.