acrobat surface box | short

We aim to create cleaner ceilings.
Show what you want, hide what you need.





© Prado Europe bv
We reserve the right to change technical details without notice if the product's appearance or functionality is unaffected.

luminaire specs 3

double short 3

single short 4


finishes 5

luminaire output 6

drivers 8

© Prado Europe bv We reserve the right to change technical details without notice if the product's appearance or functionality is unaffected.



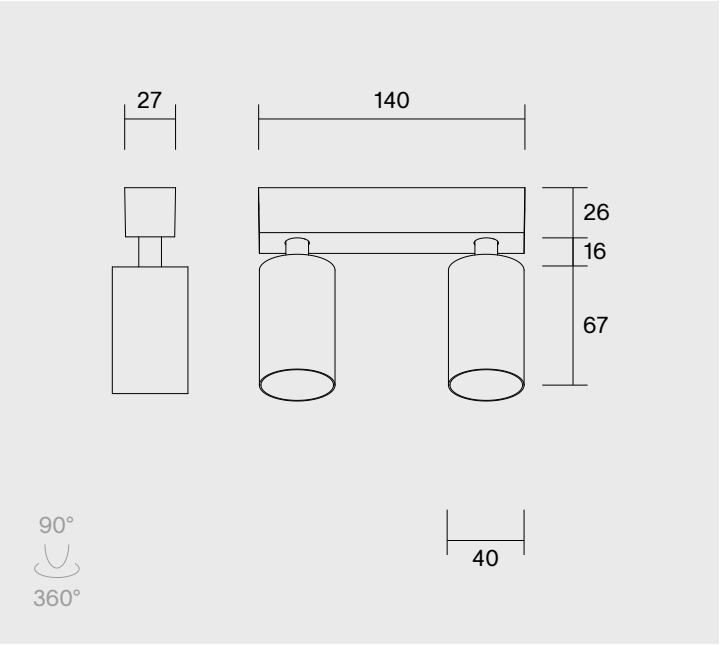

acrobat surface box mini | double short

installation

luminaire specs


delivered lumen	up to 625lm per fixture			
watts	up to 6.4W per fixture			
efficacy	up to 101lm/W per fixture			
lamp	LED			
optics	20° pc	40° pc		
	honeycomb available			
	ellipitical lens available only for 20° pc			
driver	excluded			
IP	IP20			
CRI/Ra	CRI 90+	CRI 97		
R9 value	CRI 90+: >50	CRI 97: >91		
color temperature (CCT)	2400K*	2700K	3000K	3500K*
	4000K*			
	* only available in CRI 97			
color consistency	SDCM2			
class	III			
adjustability	rotation 360°	tilt 90°		
ceiling base dimensions	140 x 27 x 26 mm			
location	indoor			
energy class	F			
marking	CE			
L80	>55000 h			

aluminum finishes	black ano	white struc
	brushed steel	brushed grey
	brushed bronze	
aluminum weight	0.62 kg	
warranty	2 years (5 years on LED)	

Respect distances, cable sections and IP ratings.
Split AC and DC to prevent LED glowing.

© Prado Europe bv



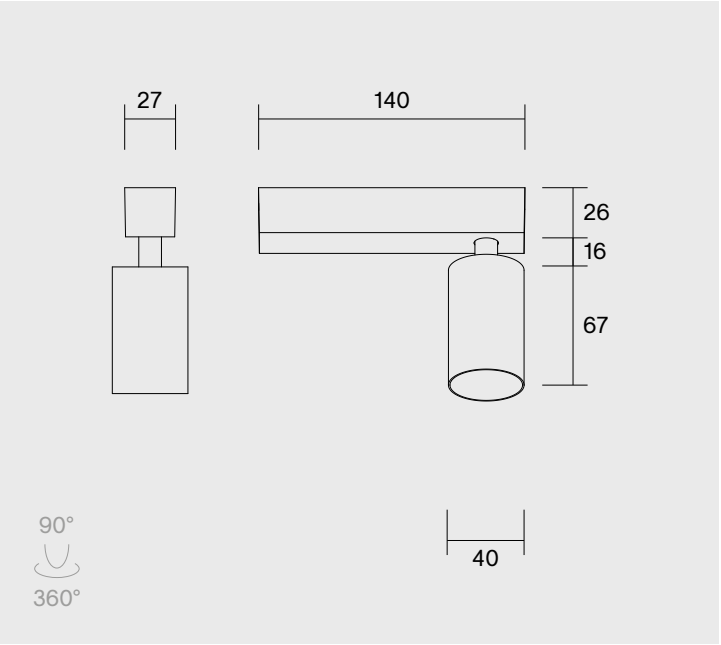

acrobat surface box mini | single short

installation

luminaire specs

delivered lumen	up to 625lm			
watts	up to 6.4W			
efficacy	up to 101lm/W			
lamp	LED			
optics	20° pc	40° pc		
	honeycomb available			
	ellipitical lens available only for 20° pc			
driver	excluded			
IP	IP20			
CRI/Ra	CRI 90+	CRI 97		
R9 value	CRI 90+: >50	CRI 97: >91		
color temperature (CCT)	2400K*	2700K	3000K	3500K*
	4000K*			
	* only available in CRI 97			
color consistency	SDCM2			
class	III			
adjustability	rotation 360°	tilt 90°		
ceiling base dimensions	140 x 27 x 26 mm			
location	indoor			
energy class	F			
marking	CE			
L80	>55000 h			

aluminum finishes	black ano	white struc
	brushed steel	brushed grey
	brushed bronze	
aluminum weight	0.43 kg	
warranty	2 years (5 years on LED)	

Respect distances, cable sections and IP ratings.
Split AC and DC to prevent LED glowing.

© Prado Europe bv
We reserve the right to change technical details without notice if the product's appearance or functionality is unaffected.

finishes

aluminum finishes

white struc (RAL 9003)



brushed steel



brushed bronze



brushed grey




black ano




Custom RAL finishes available on request.

correlated color temperature (CCT)


2400K: candle white




2700K: extra warm white




3000K: warm white



3500K: neutral white



4000K: cool white



max. mA

	20° pc	40° pc
aluminum	350mA max	350mA max
brass	350mA max	350mA max

luminaire output per fixture


		350mA
		(6.4W, 18.3Vf)
2400K	20° pc	500lm
	40° pc	500lm
2700K	20° pc	550lm
	40° pc	550lm
3000K	20° pc	575lm
	40° pc	575lm
3500K	20° pc	600lm
	40° pc	600lm
4000K	20° pc	625lm
	40° pc	625lm

© Prado Europe bv We reserve the right to change technical details without notice if the product's appearance or functionality is unaffected.


20°

40°

20° pc

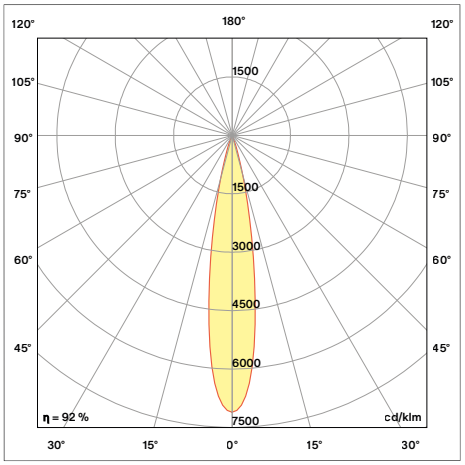

40° pc

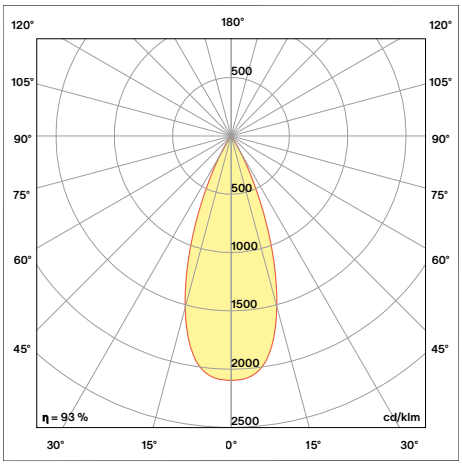

drivers (not incl.)


	number of fixtures	IP rating	product code
DALI dimmable driver 38W constant current multi power	1-2 fx	IP20	8000-0021
1-10V dimmable driver 36W constant current multi power	1-2 fx	IP20	8000-0022
non-dimmable driver 42W constant current multi power	1-2 fx	IP20	8000-0023
CASAMBI dimmable driver 38W constant current multi power	1-2 fx	IP20	8000-0028
DALI dimmable driver mini slim 15W constant current NFC 350mA	1 fx	IP20	8000-0060
DALI / 0-10V dimmable driver 60W constant current multi power	2-4 fx	IP20	8000-0026
DALI deep dim driver 20W constant current 350mA	1-2 fx	IP20	8000-0031
DALI dimmable power converter 48V to 350-700mA	1-2 fx	IP20	8000-0037
TRIAC dimmable driver 7W constant current 350mA	1 fx	IP20	8000-0034
TRIAC dimmable driver mini 10W constant current 350mA	1 fx	IP20	8000-0043

driver matrix

© Prado Europe bv We reserve the right to change technical details without notice if the product's appearance or functionality is unaffected.

wiring diagram

serial connection

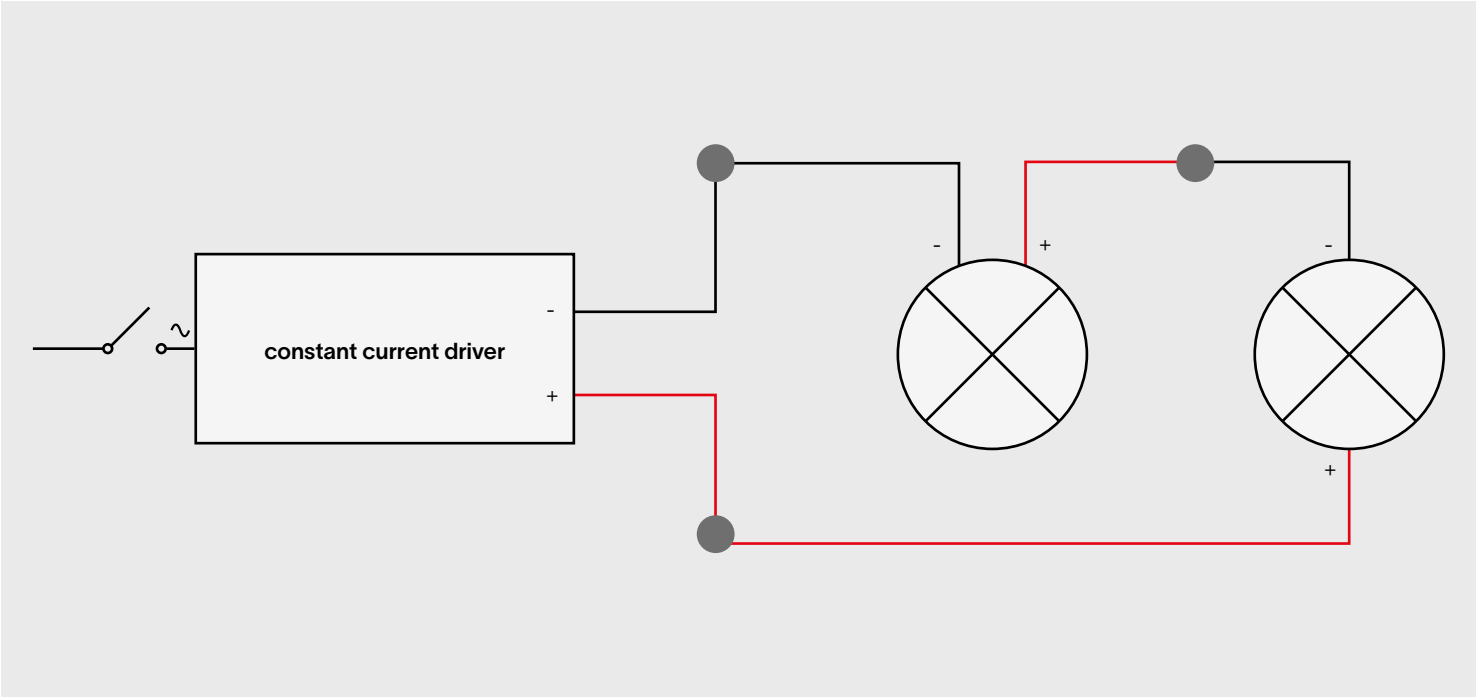

driver connections

© Prado Europe bv We reserve the right to change technical details without notice if the product's appearance or functionality is unaffected. V° 27.10.2026