acrobat surface mini | long

We aim to create cleaner ceilings.
Show what you want, hide what you need.





© Prado Europe bv
We reserve the right to change technical details without notice if the product's appearance or functionality is unaffected.

luminaire specs 3

duo long 3


trio long 4

finishes 5

luminaire output 6

© Prado Europe bv We reserve the right to change technical details without notice if the product's appearance or functionality is unaffected.



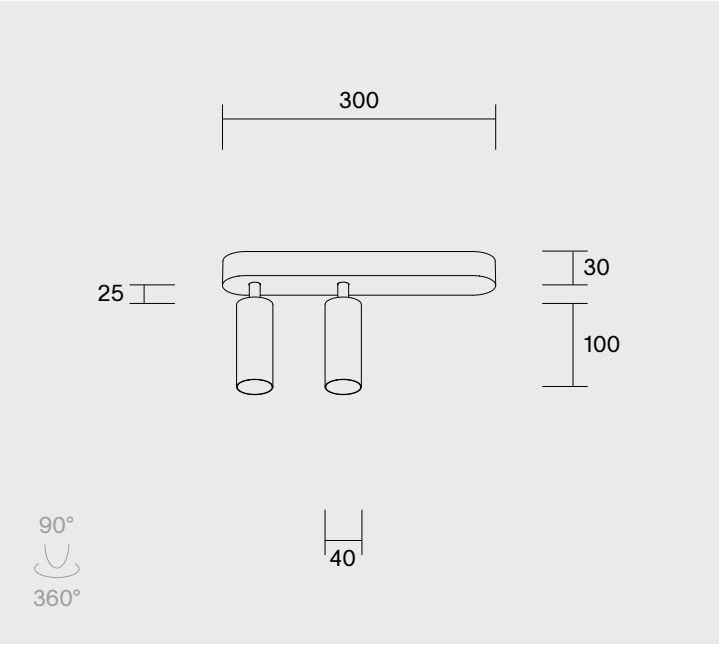

acrobat surface mini | duo long

installation

luminaire specs


delivered lumen	up to 825lm per fixture			
watts	up to 13W per fixture			
efficacy	up to 91lm/W per fixture			
lamp	LED			
optics	20° pc	40° pc		
	honeycomb available			
	ellipitical lens available only for 20° pc			
driver	excluded			
IP	IP20			
CRI/Ra	CRI 90+	CRI 97		
R9 value	CRI 90+: >50	CRI 97: >91		
color temperature (CCT)	2400K*	2700K	3000K	3500K*
	4000K*			
	* only available in CRI 97			
color consistency	SDCM2			
class	III			
adjustability	rotation 360°	tilt 90°		
ceiling base dimensions	300 x 51 x 30 mm			
location	indoor			
energy class	F			
marking	CE			
L80	>55000 h			

aluminum finishes	black ano	white struc
	brushed steel	brushed grey
	brushed bronze	
aluminum weight	1.86 kg	
brass finishes	brushed nickel	light bronze
	dark bronze	canon de fusil dark
	canon de fusil light	
brass weight	2.10 kg	
warranty	2 years (5 years on LED)	↗

Respect distances, cable sections and IP ratings.
Split AC and DC to prevent LED glowing.

© Prado Europe bv
We reserve the right to change technical details without notice if the product's appearance or functionality is unaffected.



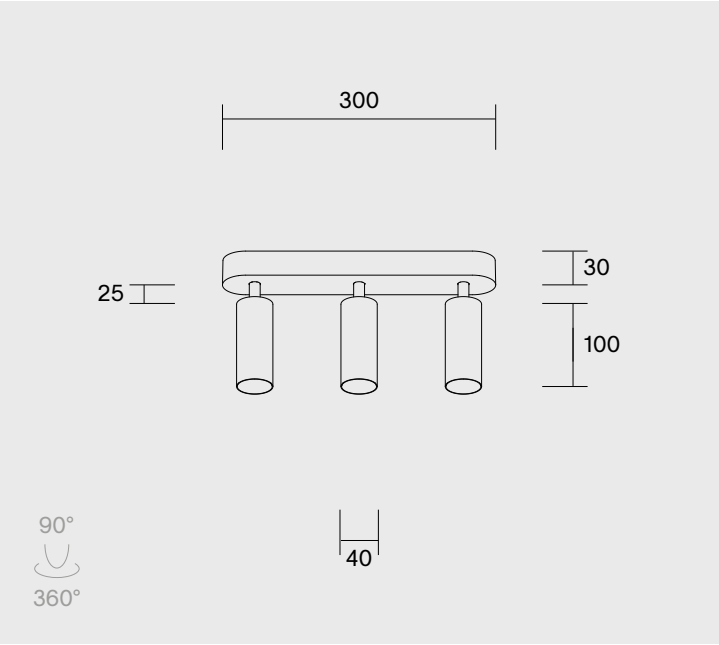

acrobat surface mini | trio long

installation

luminaire specs

delivered lumen	up to 825lm per fixture	
watts	up to 13W per fixture	
efficacy	up to 91lm/W per fixture	
lamp	LED	
optics	20° pc 40° pc	
	honeycomb available	
	ellipitical lens available only for 20° pc	
driver	excluded	
IP	IP20	
CRI/Ra	CRI 90+	CRI 97
R9 value	CRI 90+: >50	CRI 97: >91
color temperature (CCT)	2400K* 2700K 3000K 3500K*	
	4000K*	
	* only available in CRI 97	
color consistency	SDCM2	
class	III	
adjustability	rotation 360°	tilt 90°
ceiling base dimensions	300 x 51 x 30 mm	
location	indoor	
energy class	F	
marking	CE	
L80	>55000 h	

aluminum finishes	black ano	white struc
	brushed steel	brushed grey
	brushed bronze	
aluminum weight	2.31 kg	
brass finishes	brushed nickel	light bronze
	dark bronze	canon de fusil dark
	canon de fusil light	
brass weight	2.53 kg	
warranty	2 years (5 years on LED)	↗

Respect distances, cable sections and IP ratings.
Split AC and DC to prevent LED glowing.

© Prado Europe bv We reserve the right to change technical details without notice if the product's appearance or functionality is unaffected.

finishes

aluminum finishes

white struc (RAL 9003)



brushed steel



brushed bronze



brushed grey



black ano



brass finishes

brushed nickel



light bronze



dark bronze



canon de fusil light




canon de fusil dark




Custom RAL and brass finishes available on request.

correlated color temperature (CCT)


2400K: candle white




2700K: extra warm white




3000K: warm white



3500K: neutral white



4000K: cool white



© Prado Europe bv

max. mA

	20° pc	40° pc
aluminum	500mA max	500mA max
brass	500mA max	500mA max

luminaire output per fixture


		350mA	500mA
		(6.4W, 18.3Vf)	(9.7W, 19.4Vf)
2400K	20° pc	500lm	650lm
	40° pc	500lm	650lm
2700K	20° pc	550lm	750lm
	40° pc	550lm	750lm
3000K	20° pc	575lm	775lm
	40° pc	575lm	775lm
3500K	20° pc	600lm	800lm
	40° pc	600lm	800lm
4000K	20° pc	625lm	825lm
	40° pc	625lm	825lm

© Prado Europe bv We reserve the right to change technical details without notice if the product's appearance or functionality is unaffected.


20°

40°

20° pc

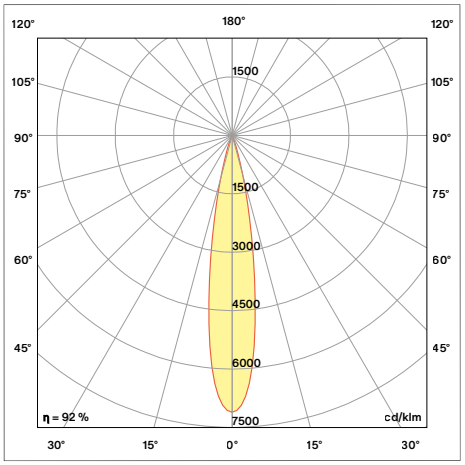


40° pc

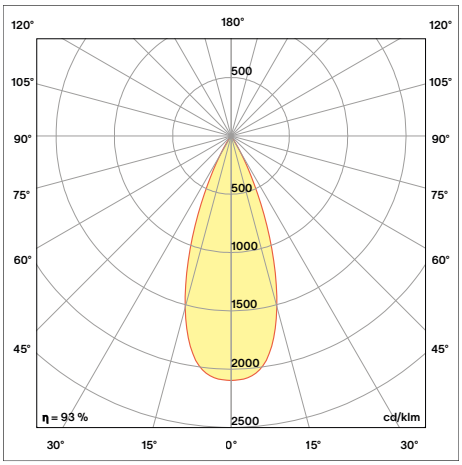

wiring diagram

parallel connection

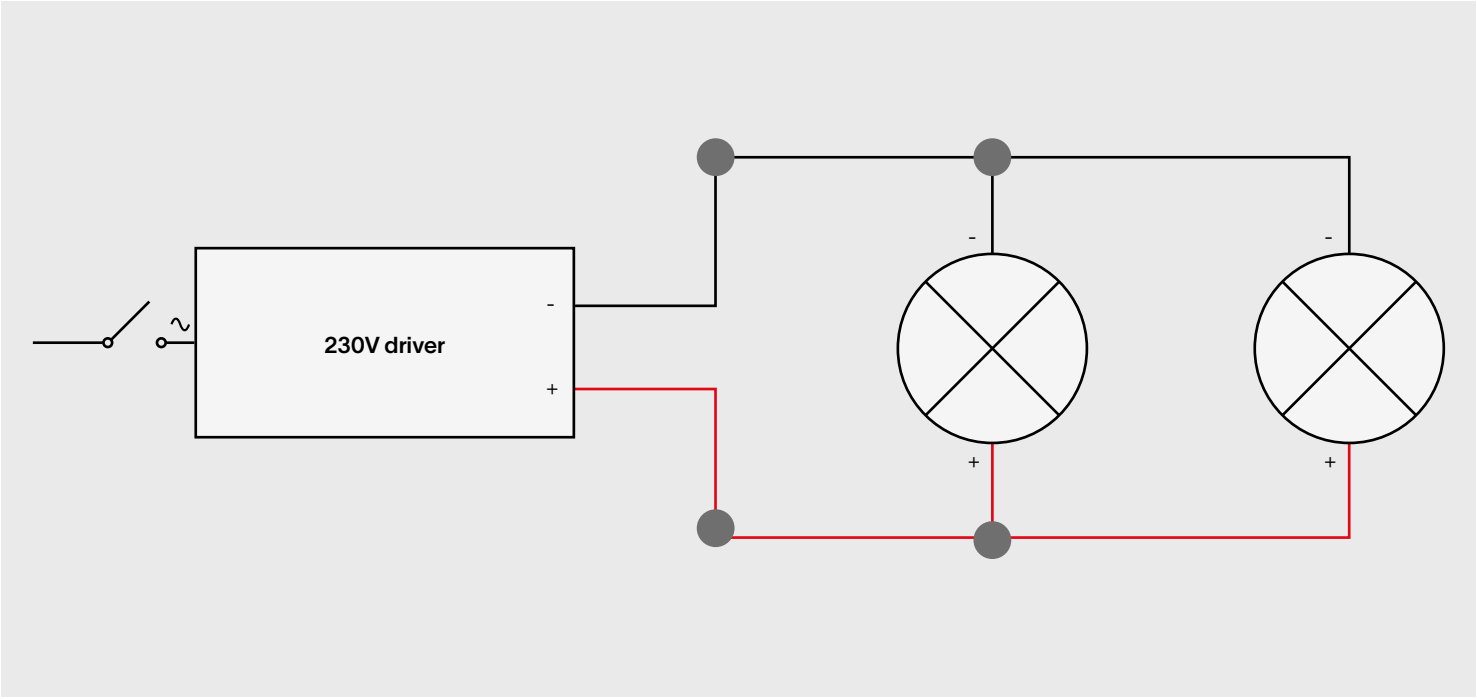

© Prado Europe bv We reserve the right to change technical details without notice if the product's appearance or functionality is unaffected.