acrojack micro | long

We aim to create cleaner ceilings.
Show what you want, hide what you need.



© Prado Europe bv
We reserve the right to change technical details without notice if the product's appearance or functionality is unaffected.

luminaire specs 3

finishes 5


luminaire output 6

accessories & drivers 8

installation rings 9

© Prado Europe bv We reserve the right to change technical details without notice if the product's appearance or functionality is unaffected.



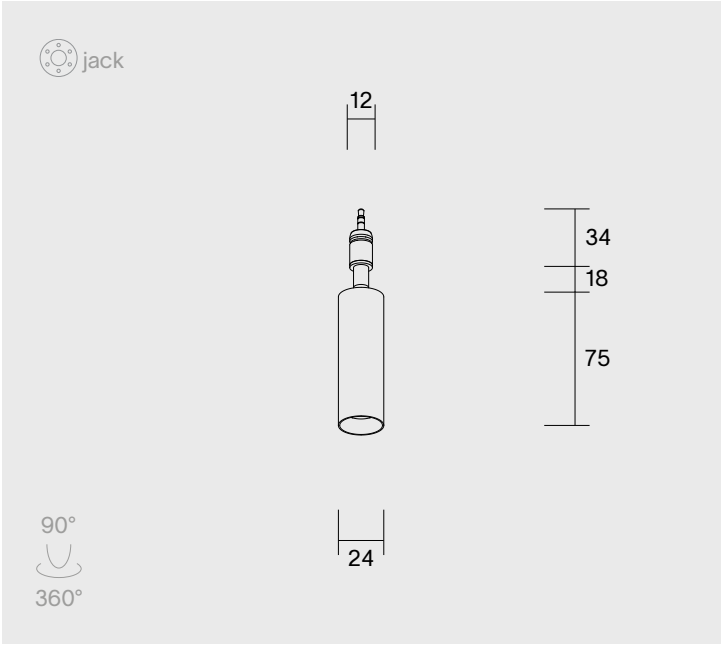

acrojack micro | long

installation

luminaire specs

delivered lumen	up to 275lm		
watts	up to 4.5W		
efficacy	up to 62lm/W		
lamp	LED		
optics	10° pc	30° pc	50° pc
driver	excluded		
IP	IP20		
CRI/Ra	CRI 97		
R9 value	CRI 97: >91		
color temperature (CCT)	2700K		3000K
color consistency	SDCM2		
class	III		
recess height	47 mm		
installation depth	driver remote: 47 mm		
adjustability	rotation 360°		tilt 90°
location	indoor		
energy class	F		
marking	CE		
L80	>55000 h		

installation rings (not incl.)	plaster ring jack	↗
	clt ring jack	↗
aluminum finishes	black ano	white struc
	brushed steel	brushed grey
	brushed bronze	
aluminum weight	0.12 kg	
brass finishes	brushed nickel	light bronze
	dark bronze	canon de fusil dark
	canon de fusil light	
brass weight	0.24 kg	
warranty	2 years (5 years on LED)	↗


Respect distances, cable sections and IP ratings.
Split AC and DC to prevent LED glowing.

© Prado Europe bv We reserve the right to change technical details without notice if the product's appearance or functionality is unaffected.

extension parts

extension length	total length (L)
100 mm	123 mm
200 mm	223 mm
300 mm	323 mm

Combining extension parts is possible up to 1 m.

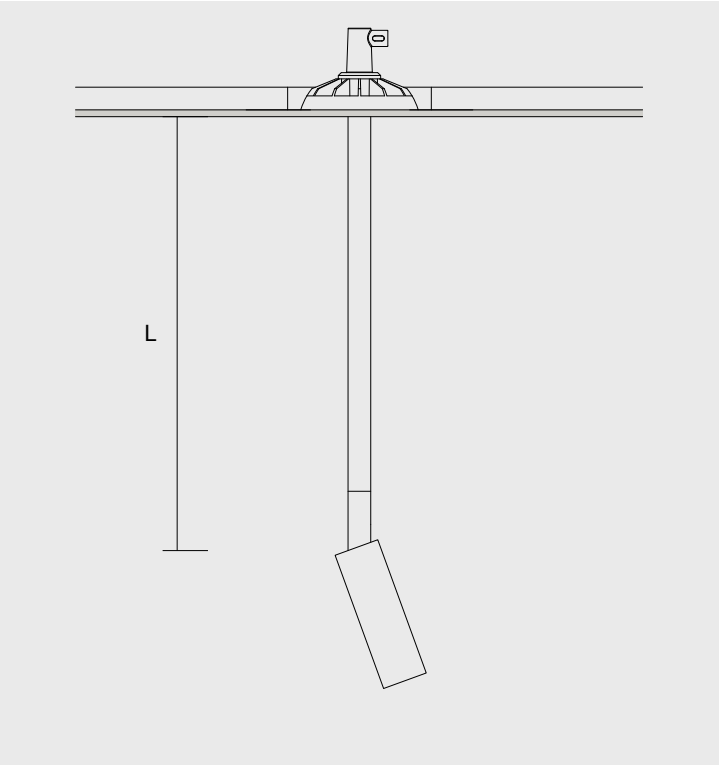

© Prado Europe bv
We reserve the right to change technical details without notice if the product's appearance or functionality is unaffected.

finishes

aluminum finishes

white struc (RAL 9003)



brushed steel



brushed bronze



brushed grey



black ano



brass finishes

brushed nickel



light bronze



dark bronze



canon de fusil light




canon de fusil dark




Custom RAL and brass finishes available on request.

correlated color temperature (CCT)

2700K: extra warm white



3000K: warm white




max. mA

	10° pc	30° pc	50° pc
aluminum	1400mA max	1400mA max	1400mA max
brass	1400mA max	1400mA max	1400mA max


luminaire output

		1050mA	1400mA
		(3.4W, 3.2Vf)	(4.5W, 3.2Vf)
2700K	10° pc	200lm	225lm
	30° pc	200lm	225lm
	50° pc	200lm	225lm
3000K	10° pc	225lm	275lm
	30° pc	225lm	275lm
	50° pc	225lm	275lm


© Prado Europe bv We reserve the right to change technical details without notice if the product's appearance or functionality is unaffected.

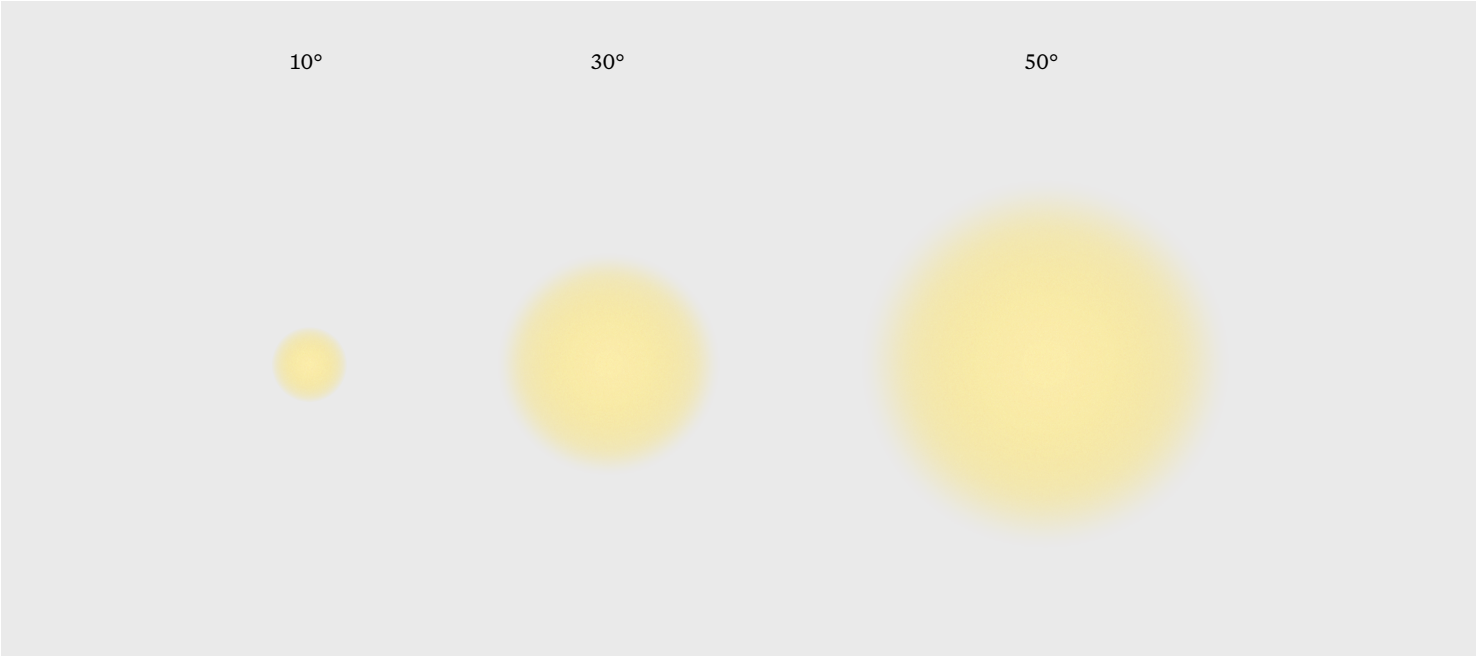


10° pc

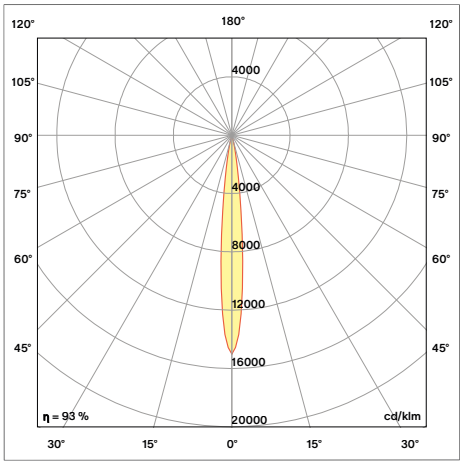

30° pc

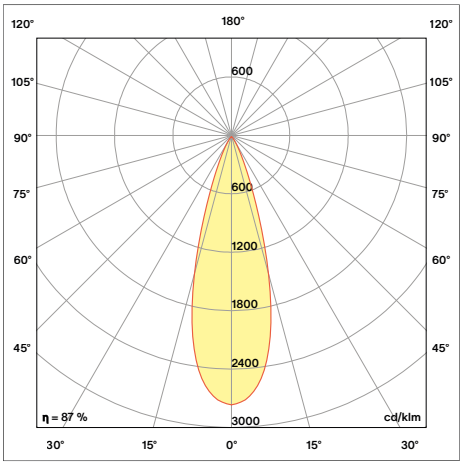

50° pc

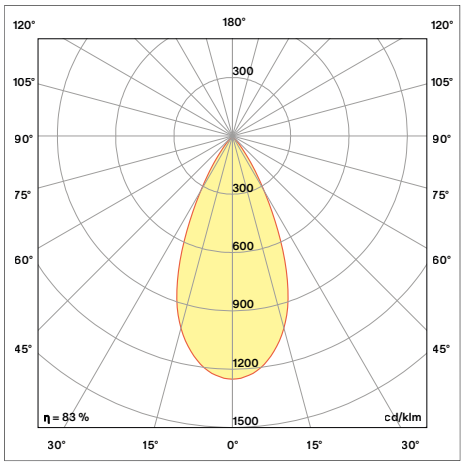

accessories

trimless installation rings (not incl.)

	application	drill hole	product code	spec sheet
plaster ring jack	plastered ceiling	Ø76 mm	8000-0006	↗
clt ring jack	CLT	consult installation	8000-0016	↗

drivers (not incl.)

	number of fixtures	IP rating	product code	installation
DALI / push dimmable driver 52W for micro long - 1400mA	1-10 fx	IP20	8000-0063	remote only


driver matrix

© Prado Europe bv We reserve the right to change technical details without notice if the product's appearance or functionality is unaffected.

trimless installation rings (not incl.)

	application	drill hole	product code	spec sheet
plaster ring jack	plastered ceiling	Ø76 mm	8000-0006	↗
clt ring jack	CLT	consult installation	8000-0016	↗


plastered ceiling

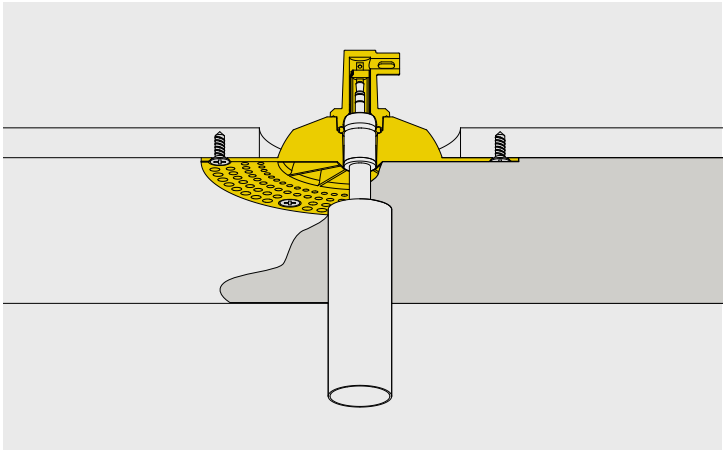

plaster ring jack

installation

location	ceiling indoor - non-sloped only	
plaster thickness	3.6 mm	
drill hole	Ø76 mm	
installation depth	47 mm	
trimless tool (not incl.)	Ø38 / Ø57 / jack	8000-0098

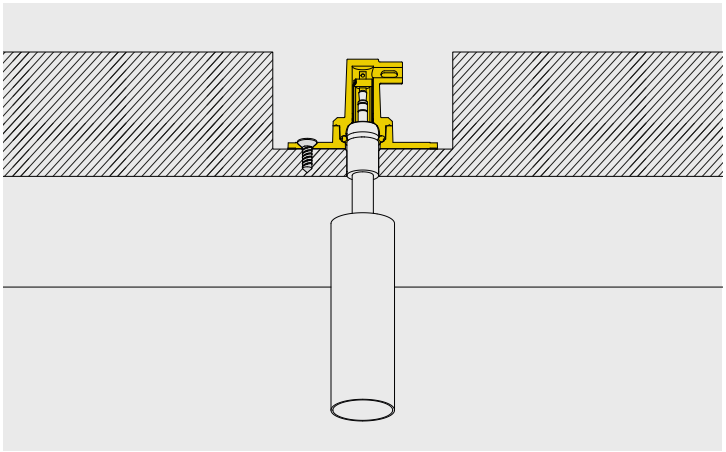

clt ring jack


installation

location	ceiling indoor - non-sloped only
clt ring height	36 mm
drill hole	consult installation

© Prado Europe bv
We reserve the right to change technical details without notice if the product's appearance or functionality is unaffected.


free air dimensions (l x w)

	remote driver
1050mA	150 x 150 mm
1400mA	200 x 200 mm

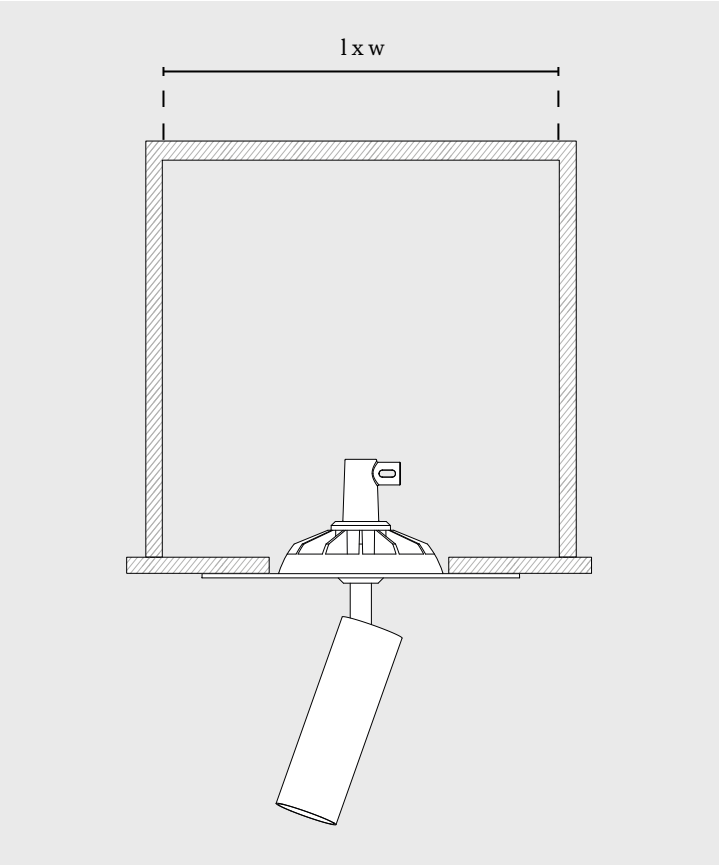

wiring diagram

serial connection

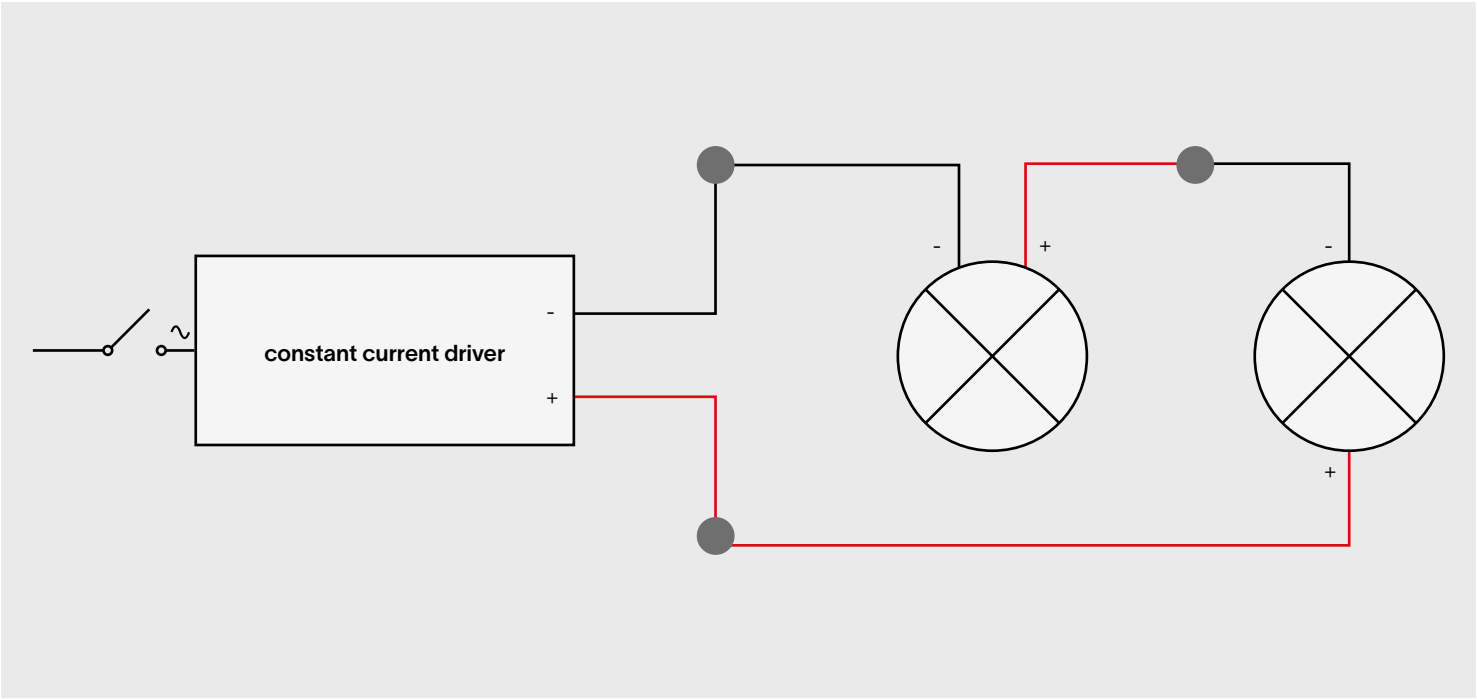

driver connections

© Prado Europe bv
We reserve the right to change technical details without notice if the product's appearance or functionality is unaffected.