acrotrack mini | long

We aim to create cleaner ceilings.
Show what you want, hide what you need.



© Prado Europe bv
We reserve the right to change technical details without notice if the product's appearance or functionality is unaffected.

luminaire specs 3

finishes 4

luminaire output 5


drivers 7

accessories 8

profiles 10

© Prado Europe bv We reserve the right to change technical details without notice if the product's appearance or functionality is unaffected.



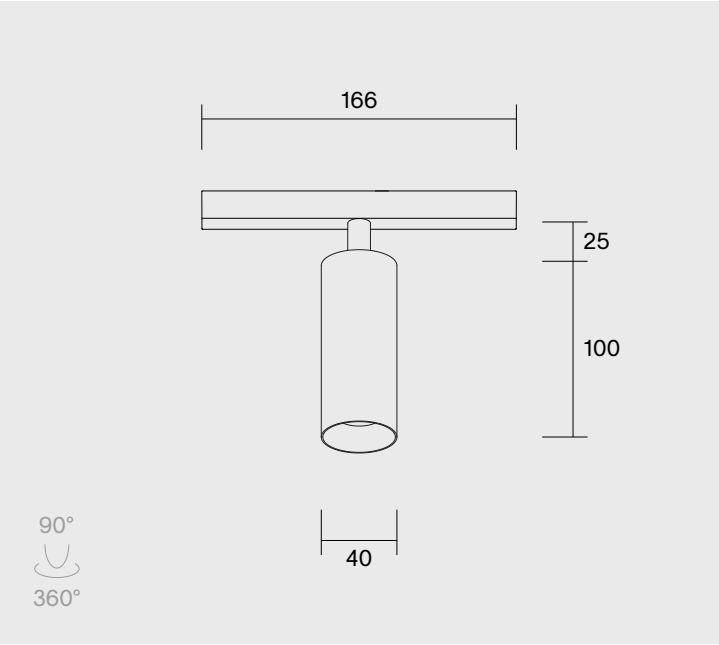

acrotrack mini | long

installation

luminaire specs

delivered lumen	up to 950lm			
watts	up to 13W			
efficacy	up to 91lm/W			
lamp	LED			
optics	10° pc	20° pc	40° pc	60° pc
	40° glass			
	honeycomb available for all pc lenses			
	ellipitical lens available only for 20° pc			
driver	in-track driver incl.			
IP	IP20			
CRI/Ra	CRI 90+		CRI 97	
R9 value	CRI 90+: >50		CRI 97: >91	
color temperature (CCT)	2400K*	2700K	3000K	3500K*
	4000K*	dim to warm: 3000K > 1800K**		
	* only available in CRI 97			
	** only available in CRI 90+			
color consistency	SDCM2			
class	III			
adjustability	rotation 360°		tilt 90°	
location	indoor			
energy class	F			
marking	CE			

L80	>55000 h	
installation acc. (not incl.)	acrotrack overview	→
aluminum finishes	black ano	white struc
	brushed steel	brushed grey
	brushed bronze	
aluminum weight	0.41 kg	
brass finishes	brushed nickel	light bronze
	dark bronze	canon de fusil dark
	canon de fusil light	
brass weight	0.75 kg	
warranty	2 years (5 years on LED)	↗

Respect distances, cable sections and IP ratings.
Split AC and DC to prevent LED glowing.

© Prado Europe bv
We reserve the right to change technical details without notice if the product's appearance or functionality is unaffected.

finishes

aluminum finishes

white struc (RAL 9003)



brushed steel



brushed bronze



brushed grey



black ano



brass finishes

brushed nickel



light bronze



dark bronze



canon de fusil light




canon de fusil dark




Custom RAL and brass finishes available on request.

correlated color temperature (CCT)


2400K: candle white




2700K: extra warm white




3000K: warm white




3500K: neutral white



4000K: cool white



dim to warm: 3000K > 1800K




max. mA

	10° pc	20° pc	40° pc	60° pc	40° glass	dim to warm (40° glass)
aluminum	350mA max	500mA max	500mA max	500mA max	700mA max	350mA max
brass	350mA max	500mA max	500mA max	500mA max	700mA max	350mA max


luminaire output

		350mA			500mA		700mA
		(6.6W, 19.9Vf)	(6.4W, 18.3Vf)	(6.0W, 17.1Vf)	(9.7W, 19.4Vf)	(8.9W, 17.8Vf)	(13.0W, 18.6Vf)
2400K	10° pc	425lm	-	-	-	-	-
	20° pc	-	500lm	-	650lm	-	-
	40° pc	-	500lm	-	650lm	-	-
	60° pc	-	450lm	-	600lm	-	-
	40° glass	-	-	425lm	-	575lm	775lm
2700K	10° pc	475lm	-	-	-	-	-
	20° pc	-	550lm	-	750lm	-	-
	40° pc	-	550lm	-	750lm	-	-
	60° pc	-	500lm	-	675lm	-	-
	40° glass	-	-	475lm	-	650lm	850lm
3000K	10° pc	500lm	-	-	-	-	-
	20° pc	-	575lm	-	775lm	-	-
	40° pc	-	575lm	-	775lm	-	-
	60° pc	-	525lm	-	700lm	-	-
	40° glass	-	-	500lm	-	675lm	900lm
3500K	10° pc	525lm	-	-	-	-	-
	20° pc	-	600lm	-	800lm	-	-
	40° pc	-	600lm	-	800lm	-	-
	60° pc	-	550lm	-	725lm	-	-
	40° glass	-	-	525lm	-	700lm	925lm
4000K	10° pc	550lm	-	-	-	-	-
	20° pc	-	625lm	-	825lm	-	-
	40° pc	-	625lm	-	825lm	-	-
	60° pc	-	575lm	-	750lm	-	-
	40° glass	-	-	550lm	-	725lm	950lm
dim to warm	40° glass	-	-	425lm	-	-	-


© Prado Europe bv

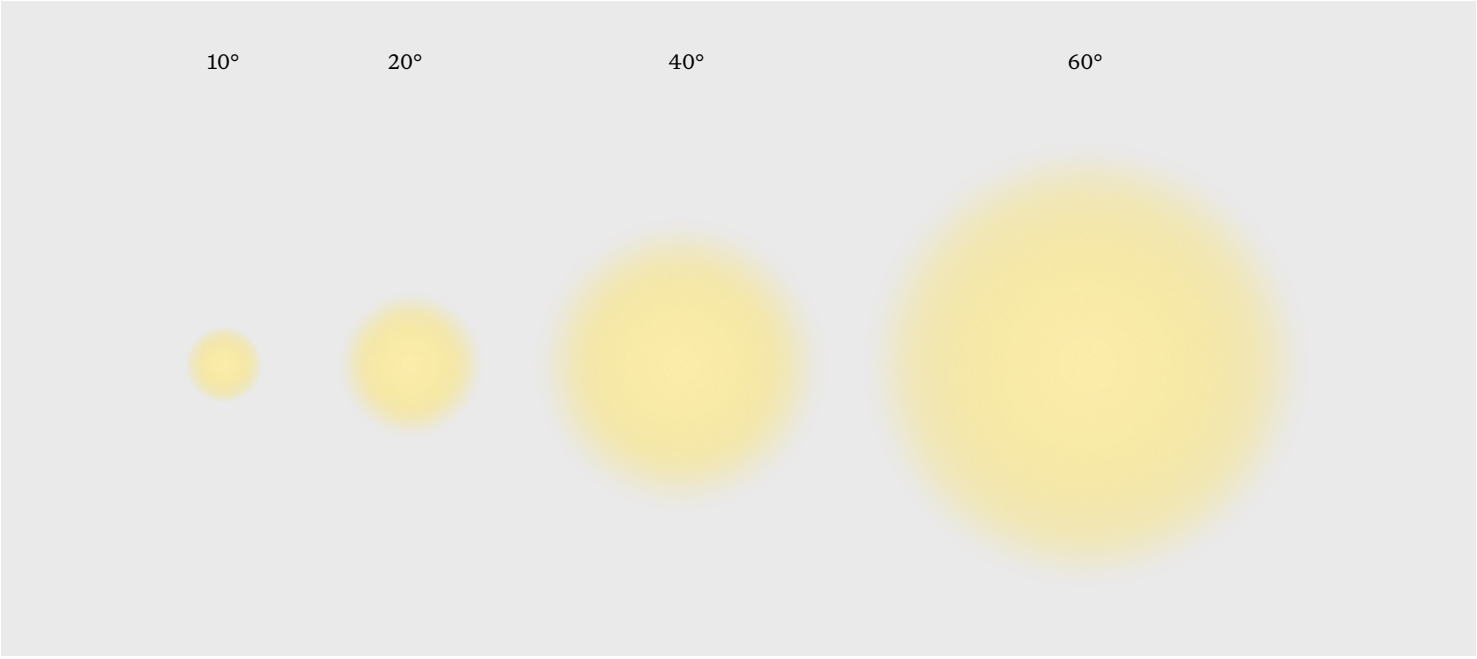


10° pc

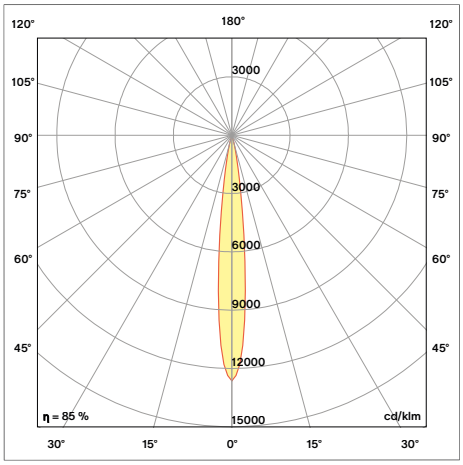


20° pc

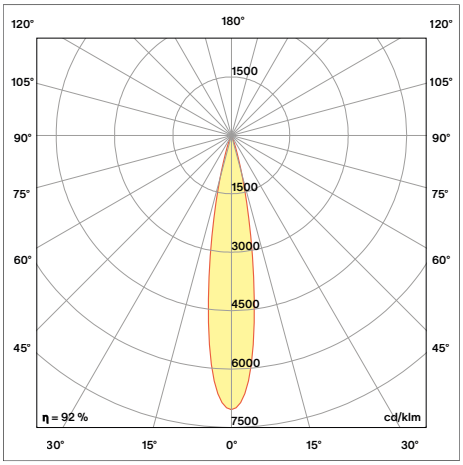


40° pc

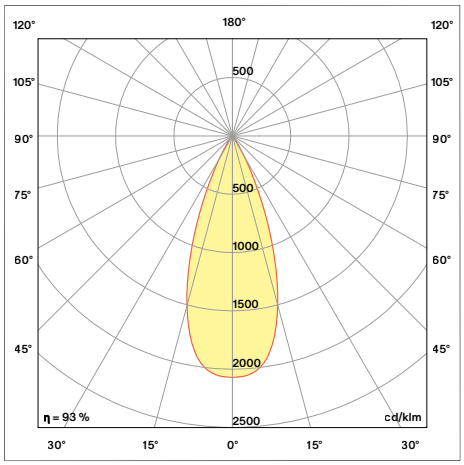


60° pc

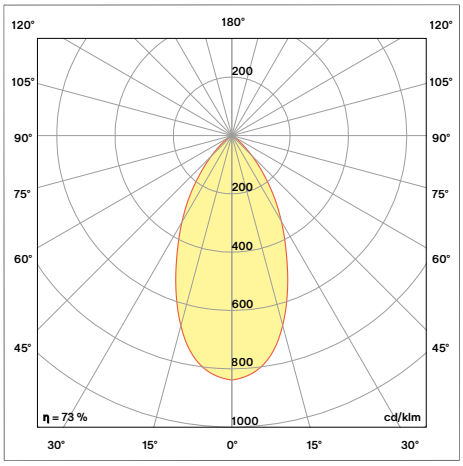

40° glass

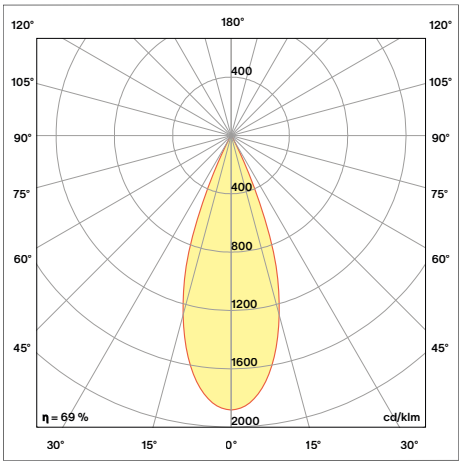

dim to warm (40° glass)

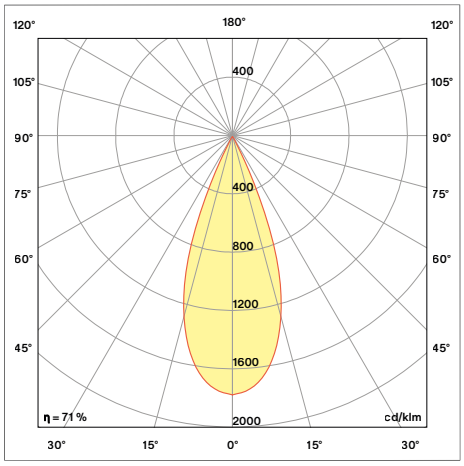

© Prado Europe bv We reserve the right to change technical details without notice if the product's appearance or functionality is unaffected.


accessories

drivers (not incl.)


	IP rating	product code	installation	spec sheet
48V driver 70W constant voltage	IP20	8000-0024	remote only	↗
48V driver 150W constant voltage	IP20	8000-0025	remote only	↗
48V driver 240W constant voltage	IP67	8000-0033	remote only	↗
48V track driver 100W	IP67	8000-0045	remote only	↗
48V track driver 100W	IP67	8000-0061	remote only	↗


© Prado Europe bv We reserve the right to change technical details without notice if the product's appearance or functionality is unaffected.

accessories

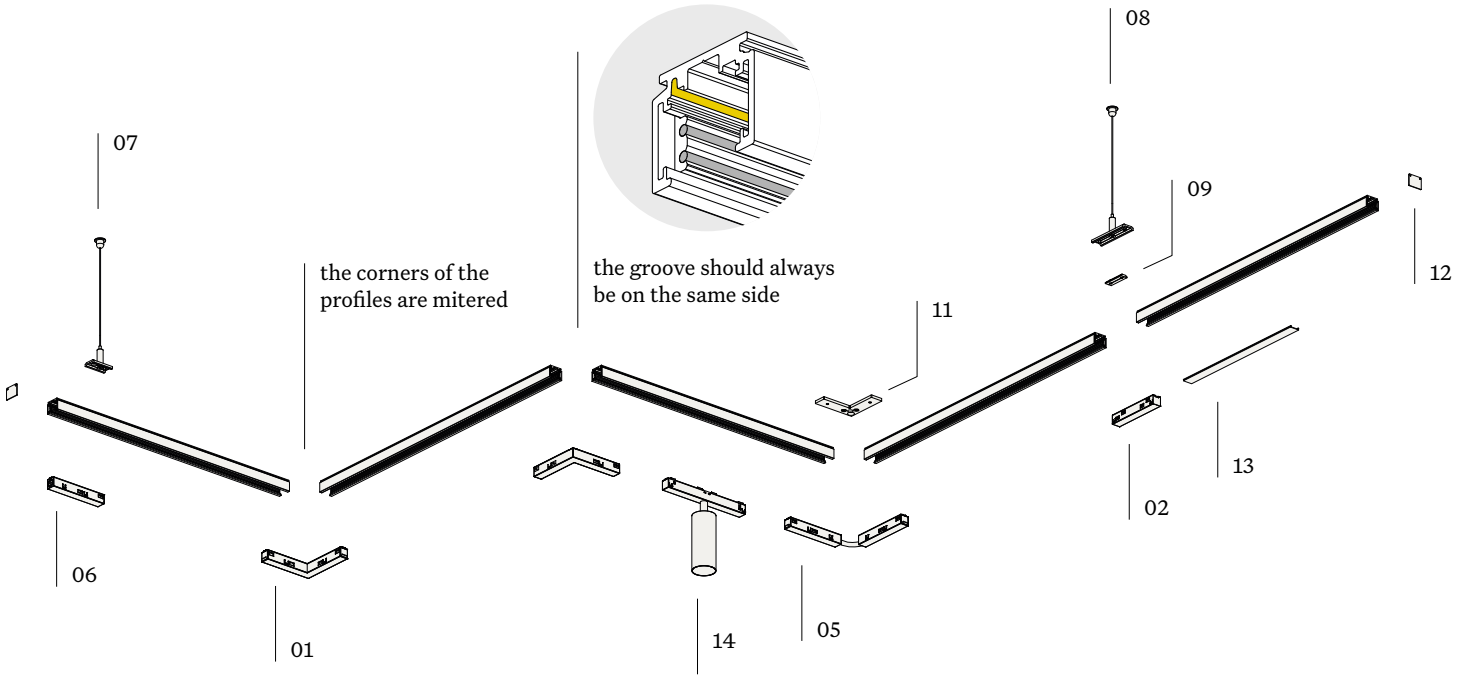


legend		product code	
01	L feed	8000-1314 (black)	8000-2868 (white)
02	middle feed	8000-1313 (black)	8000-2867 (white)
03	X feed	8000-7462 (black)	8000-8166 (white)
04	T feed	8000-8161 (black)	8000-8052 (white)
05	adjustable corner	8000-5275 (black)	8000-8167 (white)
06	end feed	8000-1312 (black)	8000-2866 (white)
07	pendant kit end	8000-3094	
08	pendant kit middle	8000-3095	
09	trimless middle bracket	8000-2871 (black)	8000-3012 (white)
10	trimless bracket (4 pcs)	8000-2870	
11	trimless L-bracket	8000-2869	
12	end cap surface	8000-1310 (black)	8000-2865 (white)
	end cap pendant	8000-1311 (black)	8000-3096 (white)
	end cap trimless	8000-2860 (black)	8000-2862 (white)
	end cap trim	8000-6832 (black)	8000-8159 (white)
13	aesthetic cover	8000-6836 (black)	8000-6837 (white)
14	acrotrack fixture	acrotrack mini long	

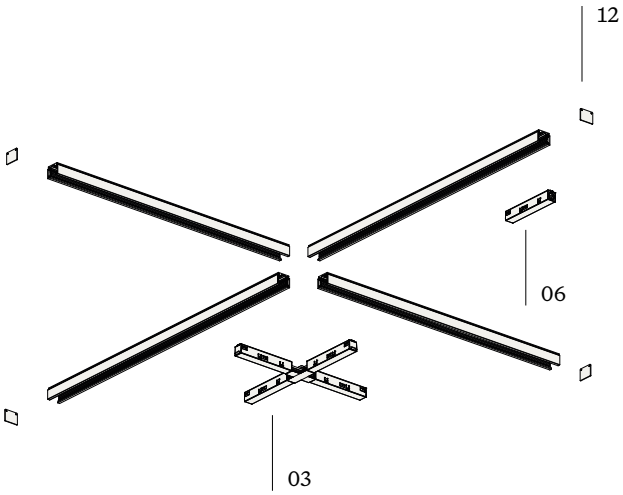


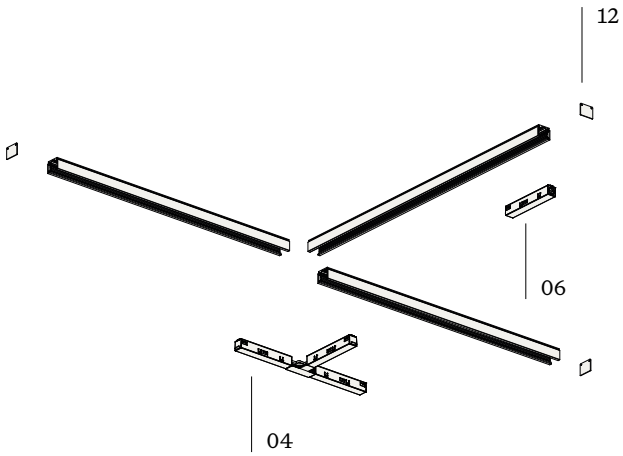


© Prado Europe bv
We reserve the right to change technical details without notice if the product's appearance or functionality is unaffected.

track polarity

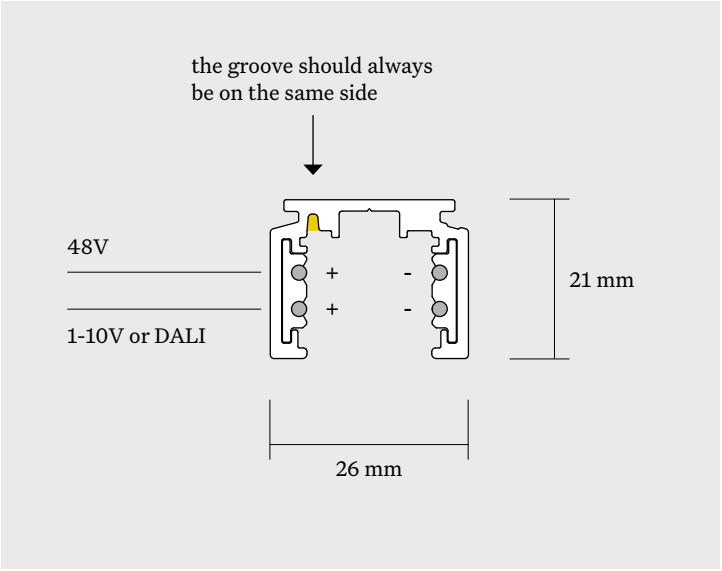


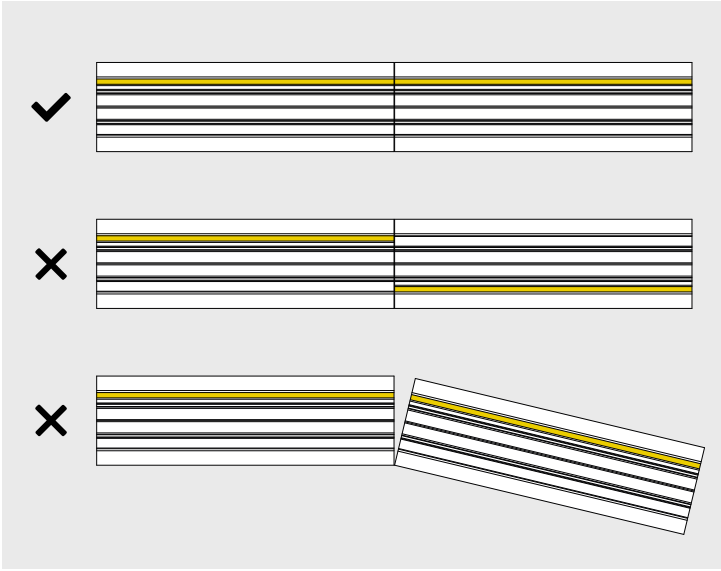

middle feed

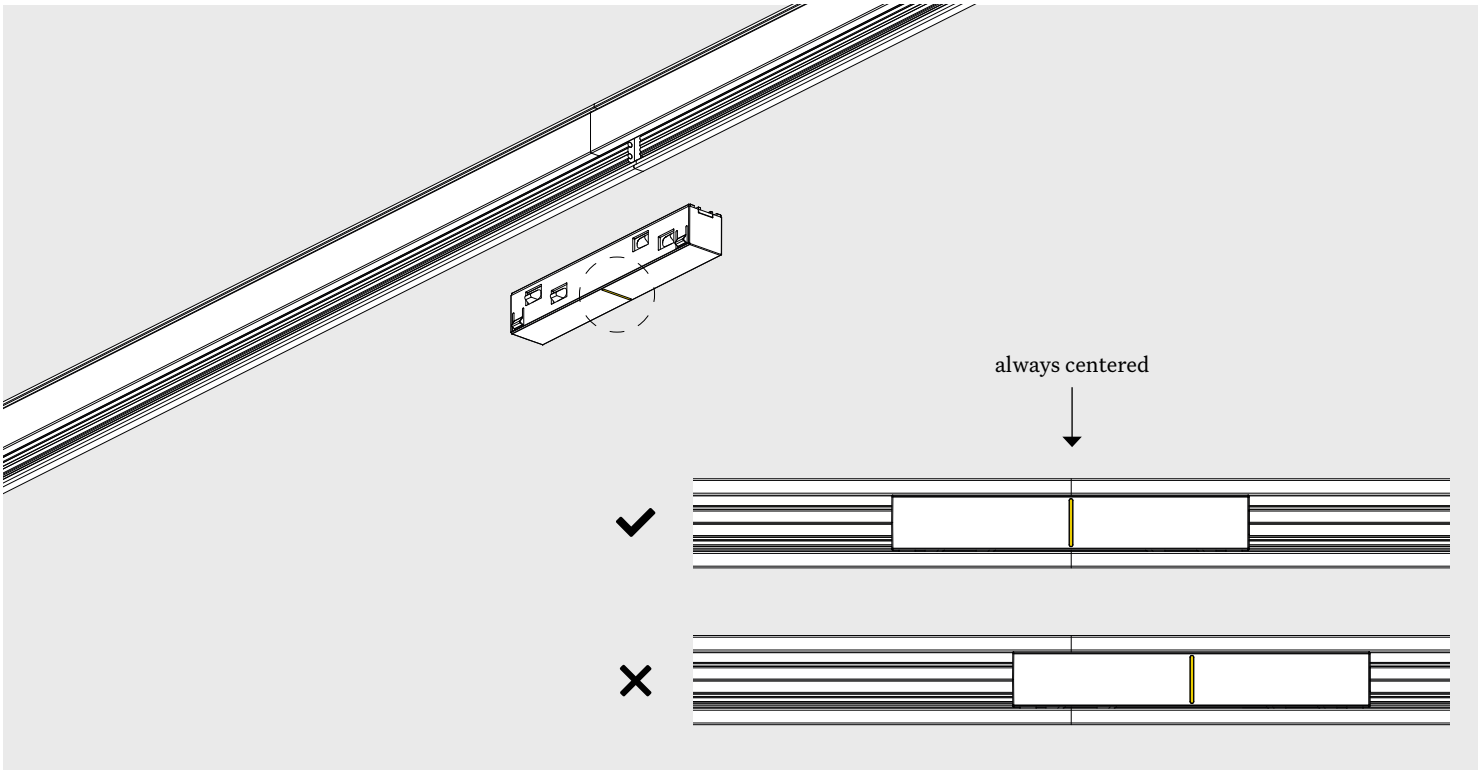


profiles

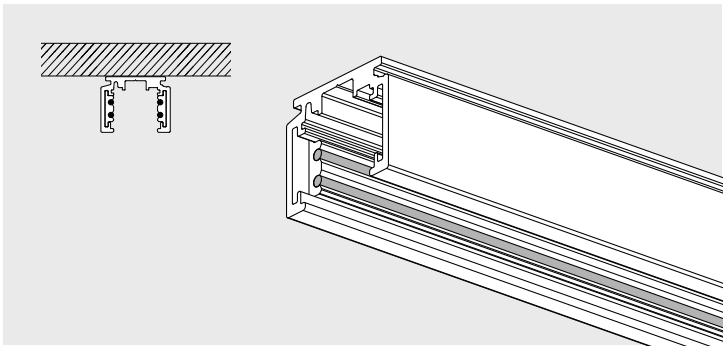


surface

application	ceiling indoor (surface)	
dimensions (w x h)	26 x 21 mm	
product code (per 1000 mm)	8000-8054 (black)	8000-8055 (white)
	8000-8160 (no finish)	

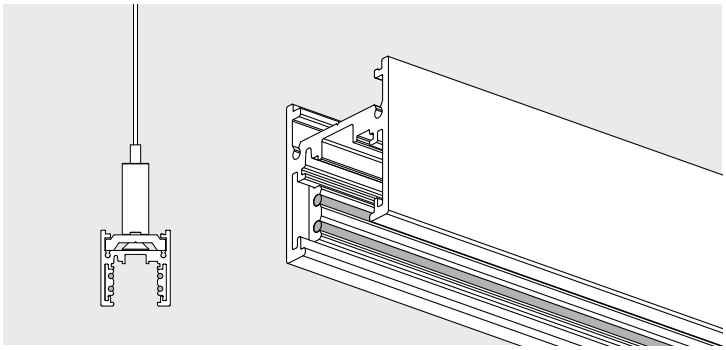


pendant

application	ceiling indoor (pendant)	
dimensions (w x h)	26 x 29 mm	
product code (per 1000 mm)	8000-8060 (black)	8000-8061 (white)

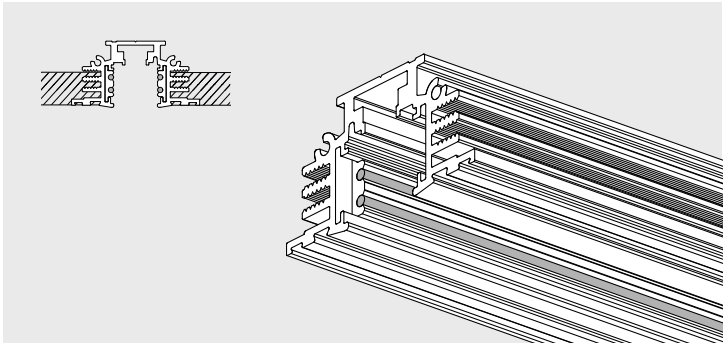

trimless

application	ceiling indoor (plastered ceiling)	
dimensions (w x h)	48 x 25 mm	
product code (per 1000 mm)	8000-8056 (black)	8000-8057 (white)

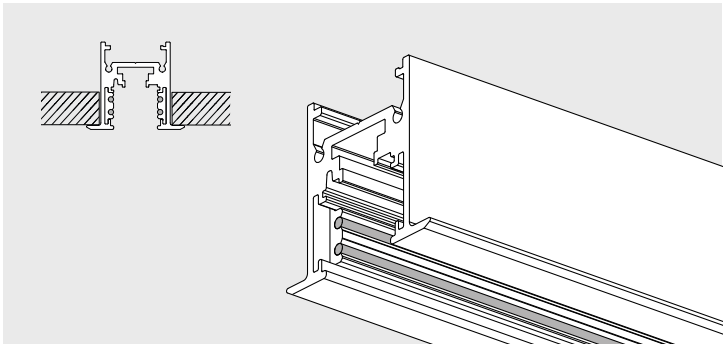


trim

application	ceiling indoor (plastered ceiling)	
dimensions (w x h)	37 x 33 mm	
product code (per 1000 mm)	8000-8058 (black)	8000-8059 (white)


© Prado Europe bv
We reserve the right to change technical details without notice if the product's appearance or functionality is unaffected.

surface ceiling fixation

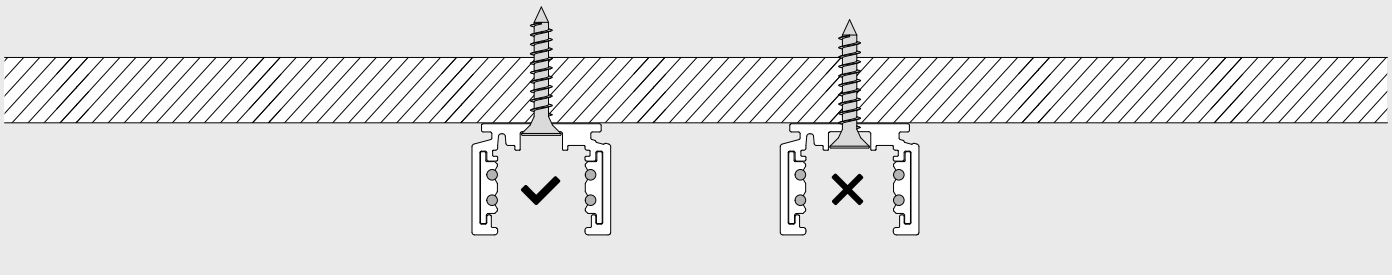





pendant ceiling fixation

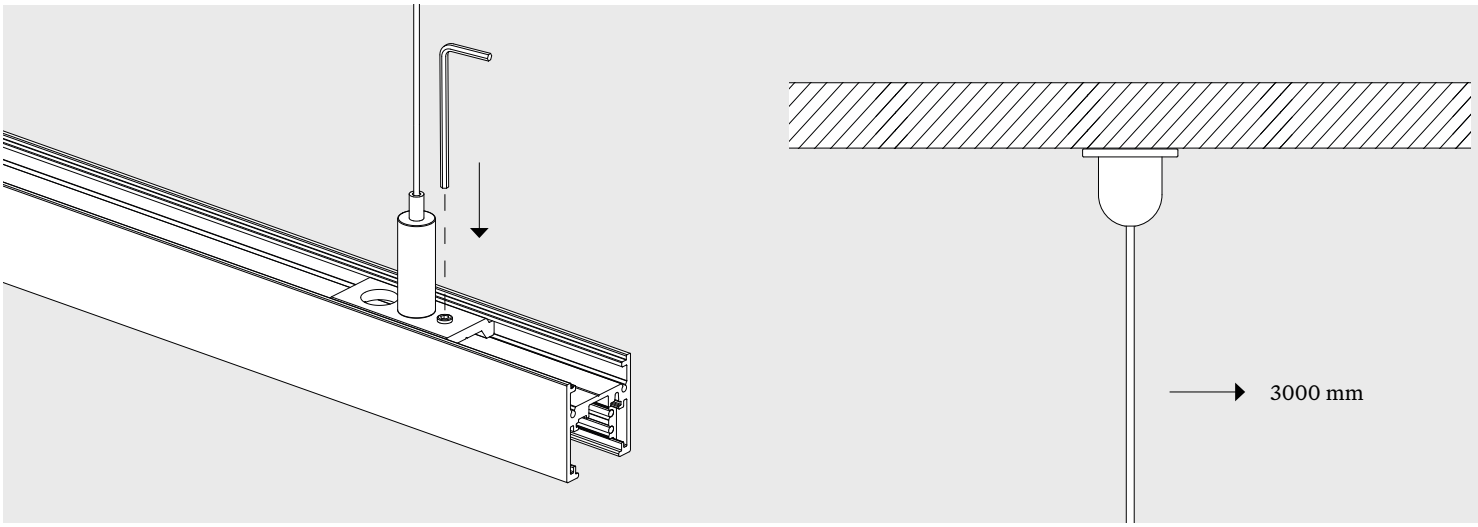

max. load

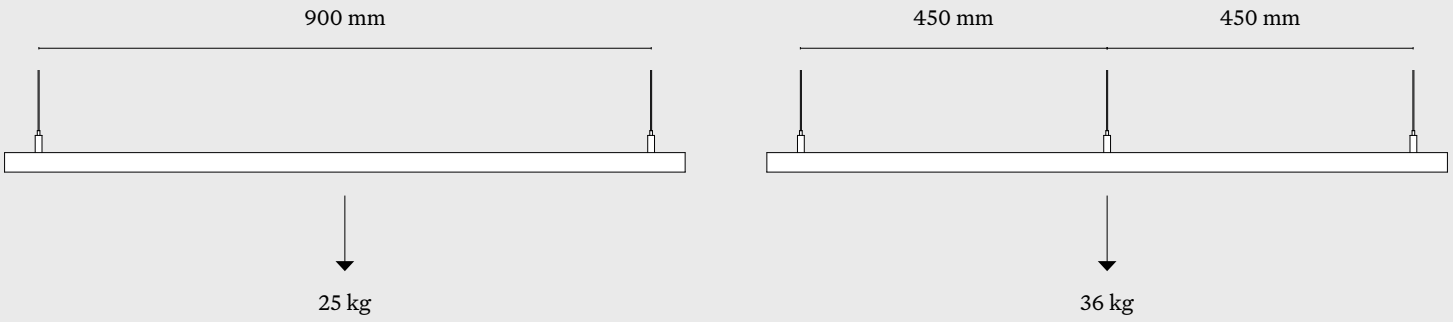


distributed load

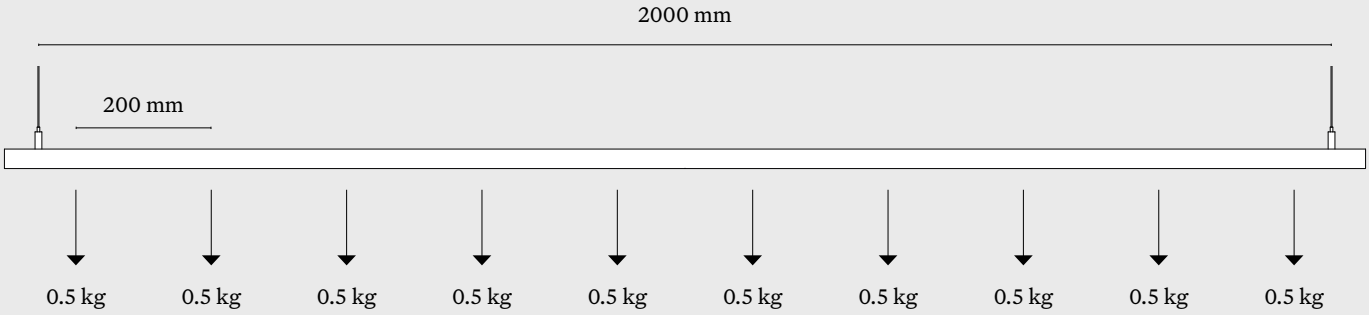


© Prado Europe bv We reserve the right to change technical details without notice if the product's appearance or functionality is unaffected.

trimless ceiling fixation

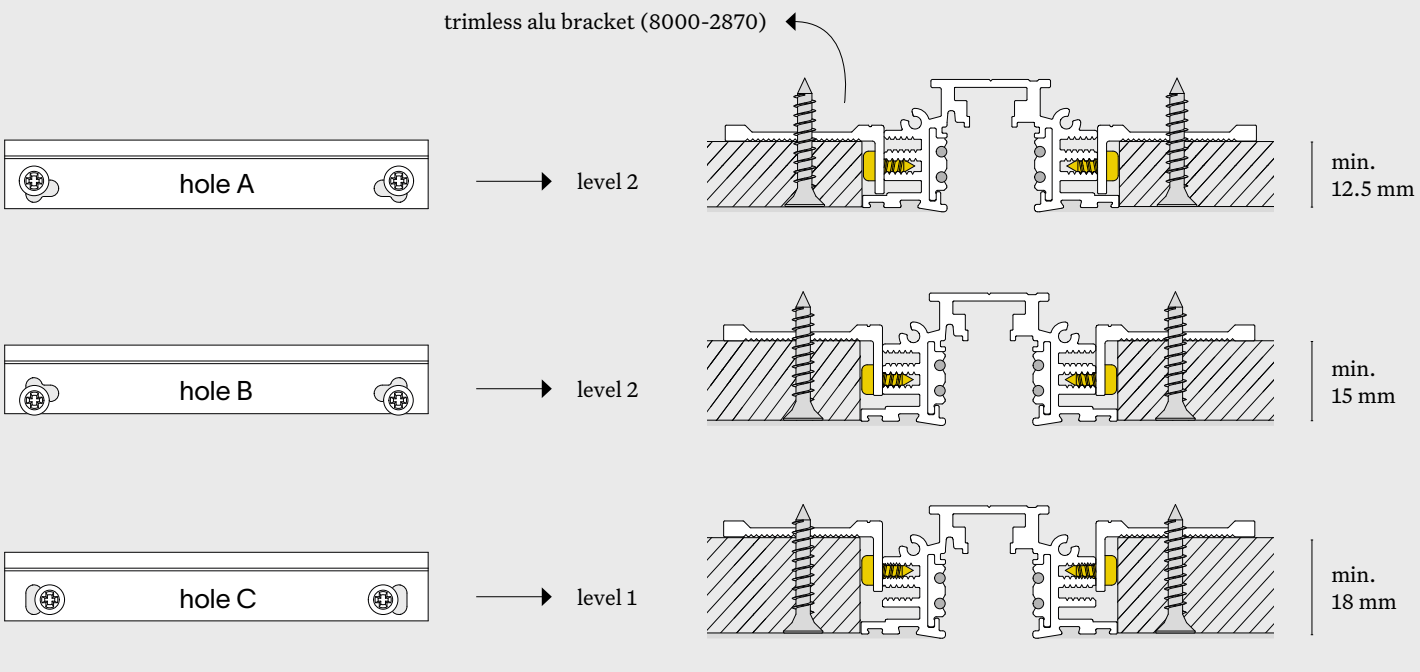


trim ceiling fixation

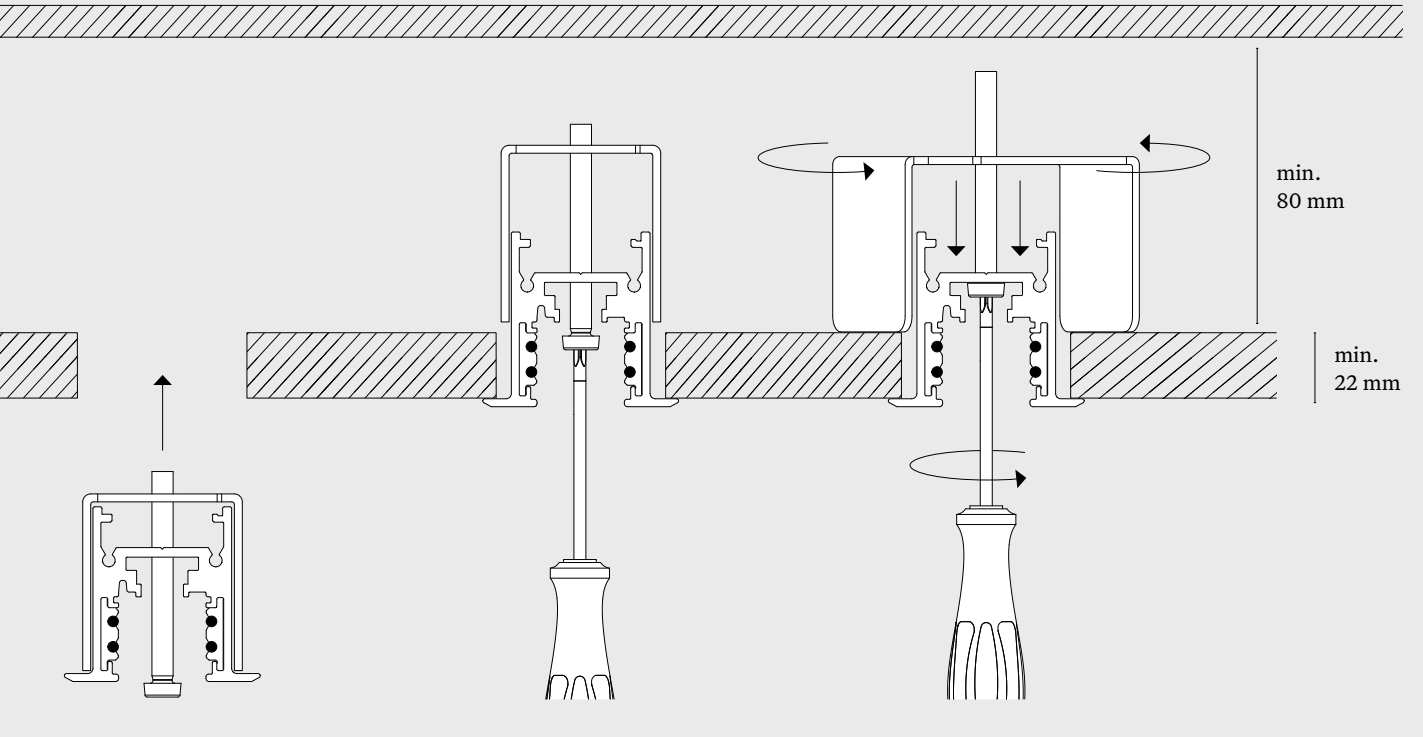

wiring diagram

parallel connection

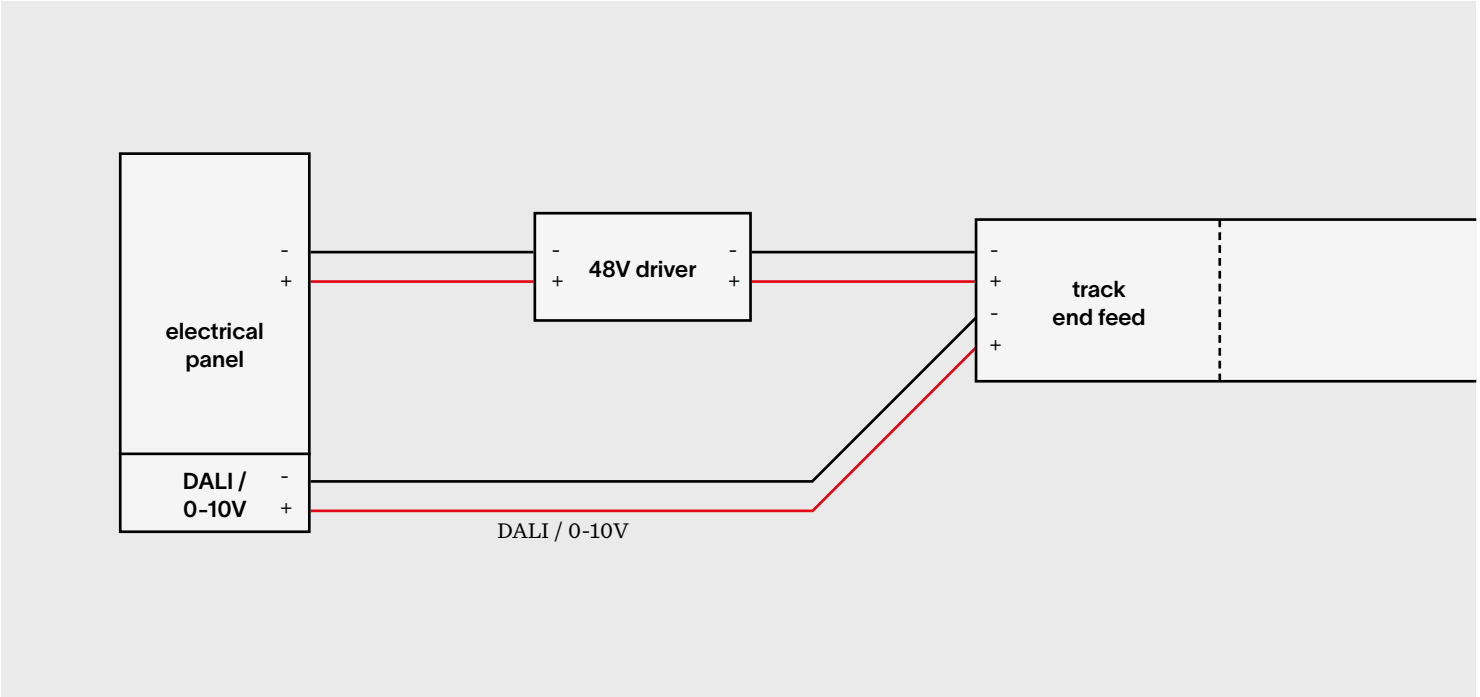

© Prado Europe bv We reserve the right to change technical details without notice if the product's appearance or functionality is unaffected.