invisible E27


We aim to create cleaner ceilings.
Show what you want, hide what you need.

© Prado Europe bv We reserve the right to change technical details without notice if the product's appearance or functionality is unaffected.

luminaire specs 3

installation rings 4

© Prado Europe bv We reserve the right to change technical details without notice if the product's appearance or functionality is unaffected.

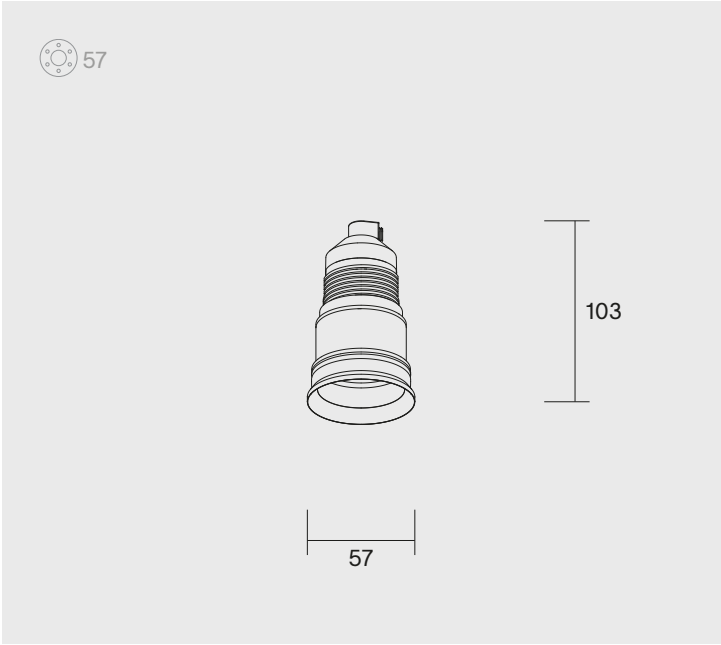

invisible E27

installation

luminaire specs

fitting	E27
input voltage	200 - 240V
power	max. 60W
light bulb	excluded
IP	IP20
class	II
recess height	103 mm
installation depth	driver remote: 108 mm
	local driver : consult driver specs
location	indoor
marking	CE

installation rings (not incl.)	plaster ring Ø57
	adj. thin plaster ring Ø57
	adj. thick plaster ring Ø57
	clt csc ring Ø57
weight	0.14 kg
warranty	2 years (5 years on LED)


Respect distances, cable sections and IP ratings.
Split AC and DC to prevent LED glowing.

© Prado Europe bv We reserve the right to change technical details without notice if the product's appearance or functionality is unaffected.

trimless installation rings (not incl.)

	application	drill hole	product code	spec sheet
plaster ring Ø57	plastered ceiling	Ø76 mm	8000-0003	↗
adj. thin plaster ring Ø57 (3.6 - 20 mm)	plastered ceiling	Ø76 mm	8000-0123	↗
adj. thick plaster ring Ø57 (12 - 33 mm)	plastered ceiling	Ø132 mm	8000-0103	↗
clt csc ring Ø57 (before claring ceiling)	CLT / CSC	consult installation	8000-0013	↗


plastered ceiling

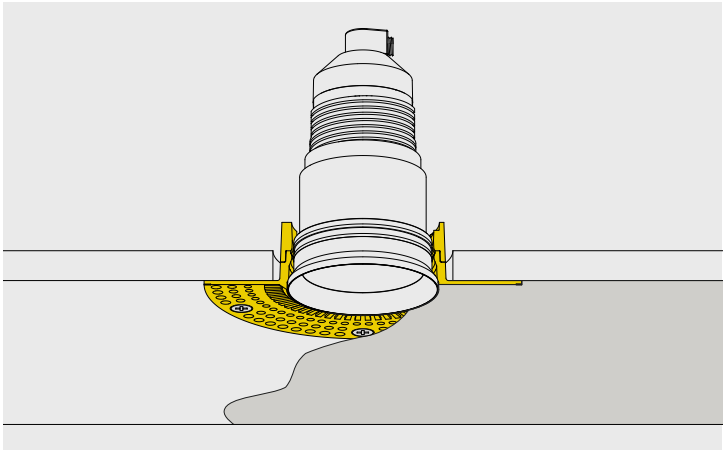

plaster ring Ø57

installation


location	ceiling indoor	
plaster thickness	3.6 mm	
drill hole	Ø76 mm	
installation depth	108 mm	
trimless tool (not incl.)	Ø38 / Ø57 / jack	8000-0098

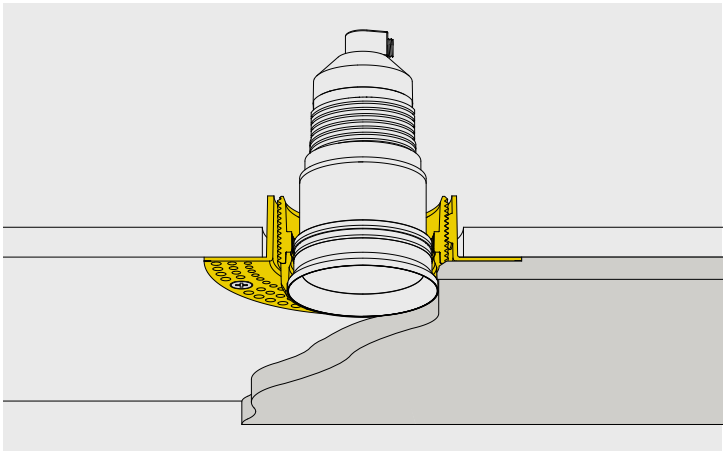

adj. thin plaster ring Ø57

installation

location	ceiling indoor	
plaster thickness	min. 3.6 mm	max. 20 mm
drill hole	Ø76 mm	
installation depth	108 mm	
trimless tool (not incl.)	Ø38 / Ø57 / jack	8000-0098

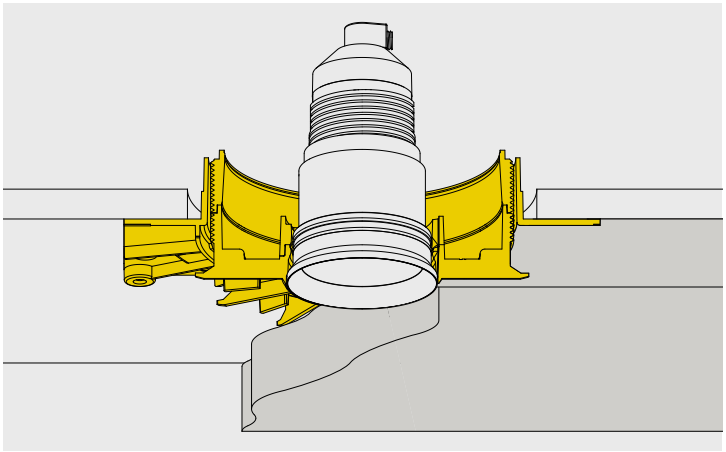

adj. thick plaster ring Ø57

installation


location	ceiling indoor	
plaster thickness	min. 12 mm	max. 33 mm
installation depth	108 mm	
drill hole	Ø132 mm	

© Prado Europe bv
We reserve the right to change technical details without notice if the product's appearance or functionality is unaffected.

clt csc ceiling

installation clt

installation csc

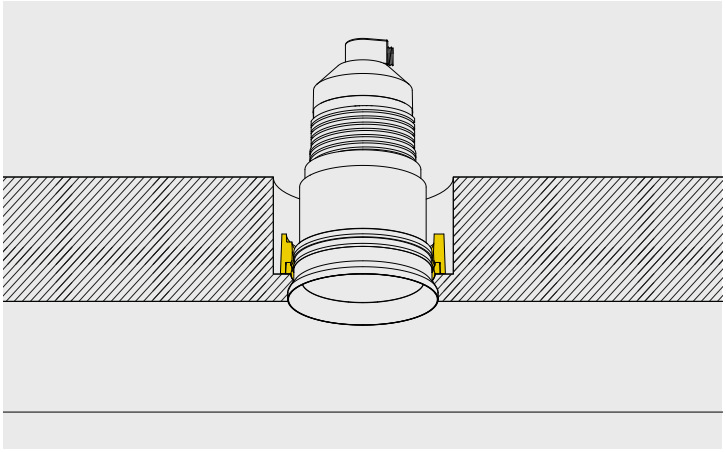

clt csc ring ∅57

location	ceiling indoor
cut-out	consult installation