light only | trim long

We aim to create cleaner ceilings.
Show what you want, hide what you need.



© Prado Europe bv
We reserve the right to change technical details without notice if the product's appearance or functionality is unaffected.

luminaire specs 3


finishes 4

luminaire output 5

drivers 7

© Prado Europe bv We reserve the right to change technical details without notice if the product's appearance or functionality is unaffected.



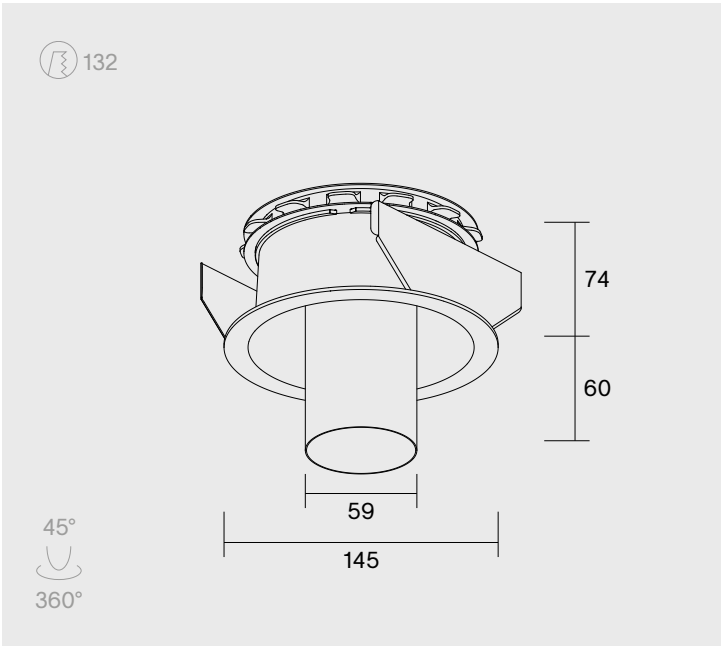

light only | trim long

installation

luminaire specs

delivered lumen	up to 1050lm			
watts	up to 13W			
efficacy	up to 76lm/W			
lamp	LED			
optics	25° glass	40° glass		
driver	excluded			
IP	IP44			
CRI/Ra	CRI 90+	CRI 97		
R9 value	CRI 90+: >50	CRI 97: >91		
color temperature (CCT)	2400K*	2700K	3000K	3500K*
	4000K*	dim to warm: 3000K > 1800K**		
	* only available in CRI 97			
	** only available in CRI 90+			
color consistency	SDCM2			
class	III			
drill hole size	Ø132 mm			
ceiling thickness	min. 2 mm	max. 24 mm		
recess height	74 mm			
installation depth	driver remote: 79 mm			
	local driver : consult driver specs ↗			
adjustability	rotation 360°	tilt 45°		

location	indoor	
energy class	F	
marking	CE	
L80	>55000 h	
aluminum finishes	black ano	white struc
	brushed steel	brushed grey
	brushed bronze	
aluminum weight	0.89 kg	
warranty	2 years (5 years on LED) ↗	

Respect distances, cable sections and IP ratings.
Split AC and DC to prevent LED glowing.

© Prado Europe bv
We reserve the right to change technical details without notice if the product's appearance or functionality is unaffected.

finishes

aluminum finishes

white struc (RAL 9003)



brushed steel



brushed bronze



brushed grey




black ano




correlated color temperature (CCT)


2400K: candle white




2700K: extra warm white




3000K: warm white




3500K: neutral white



4000K: cool white



dim to warm: 3000K > 1800K




max. mA

	25° glass	40° glass	dim to warm (40° glass)
aluminum	700mA max	700mA max	350mA max
brass	700mA max	700mA max	350mA max


luminaire output

		350mA	500mA	700mA
		(6.0W, 17.1Vf)	(8.9W, 17.8Vf)	(13.0W, 18.6Vf)
2400K	25° glass	350lm	500lm	650lm
	40° glass	450lm	625lm	825lm
2700K	25° glass	375lm	550lm	725lm
	40° glass	500lm	700lm	950lm
3000K	25° glass	400lm	575lm	750lm
	40° glass	525lm	725lm	975lm
3500K	25° glass	425lm	600lm	775lm
	40° glass	550lm	750lm	1000lm
4000K	25° glass	425lm	625lm	800lm
	40° glass	575lm	775lm	1050lm
dim to warm	40° glass	525lm	-	-


© Prado Europe bv We reserve the right to change technical details without notice if the product's appearance or functionality is unaffected.

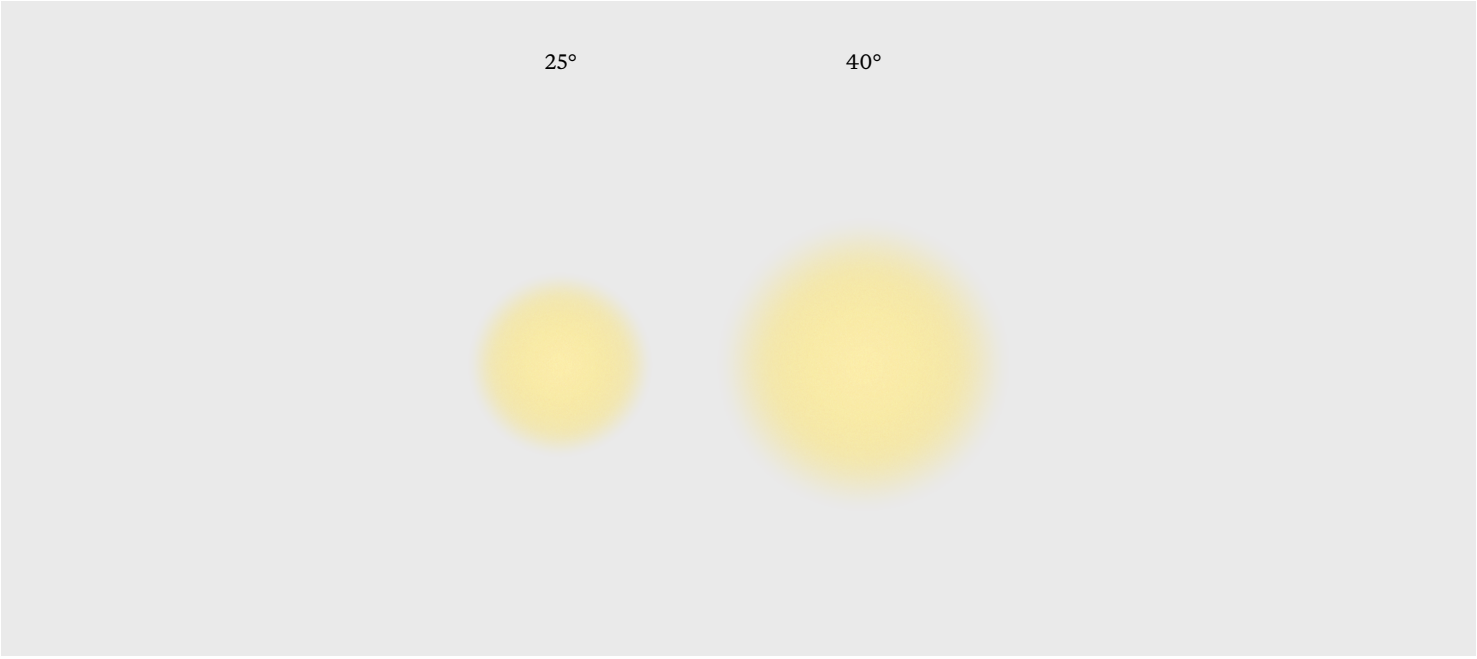


25° glass

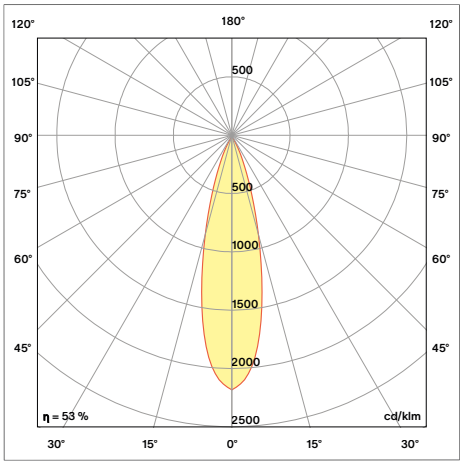

40° glass

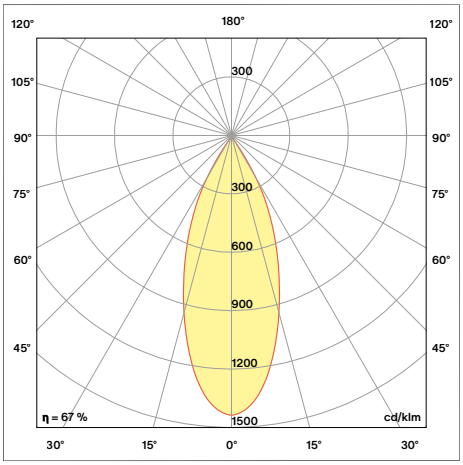


dim to warm (40° glass)

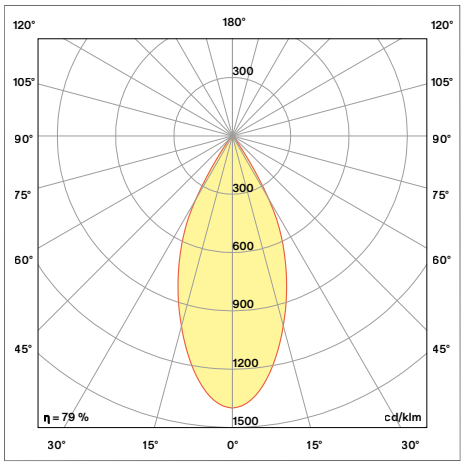

© Prado Europe bv

drivers (not incl.)	number of fixtures	IP rating	product code	installation depth
DALI dimmable driver 38W constant current multi power	1-2 fx	IP20	8000-0021	40 mm / remote
1-10V dimmable driver 36W constant current multi power	1-2 fx	IP20	8000-0022	40 mm / remote
non-dimmable driver 42W constant current multi power	1-2 fx	IP20	8000-0023	40 mm / remote
CASAMBI dimmable driver 38W constant current multi power	1-2 fx	IP20	8000-0028	40 mm / remote
DALI dimmable driver mini slim 15W constant current NFC 350mA	1 fx	IP20	8000-0060	30 mm / remote
DALI dimmable driver mini slim 15W constant current NFC 500mA	1 fx	IP20	8000-0065	30 mm / remote
DALI dimmable driver mini slim 15W constant current NFC 700mA	1 fx	IP20	8000-0066	30 mm / remote
DALI / 0-10V dimmable driver 60W constant current multi power	2-5 fx	IP20	8000-0026	35 mm / remote
DALI deep dim driver 20W constant current 350mA	1-2 fx	IP20	8000-0031	40 mm / remote
DALI deep dim driver 20W constant current 500mA	1-2 fx	IP20	8000-0030	40 mm / remote
DALI deep dim driver 20W constant current 700mA	1 fx	IP20	8000-0027	40 mm / remote
DALI dimmable power converter 48V to 350-700mA	1-2 fx	IP20	8000-0037	25 mm / remote
TRIAC dimmable driver 7W constant current 350mA	1 fx	IP20	8000-0034	40 mm / remote
TRIAC dimmable driver 10W constant current 500mA	1 fx	IP20	8000-0035	40 mm / remote
TRIAC dimmable driver 14W constant current 700mA	1 fx	IP20	8000-0046	40 mm / remote
TRIAC dimmable driver mini 10W constant current 350mA	1 fx	IP20	8000-0043	30 mm
TRIAC dimmable driver mini 10W constant current 500mA	1 fx	IP20	8000-0044	30 mm


driver matrix

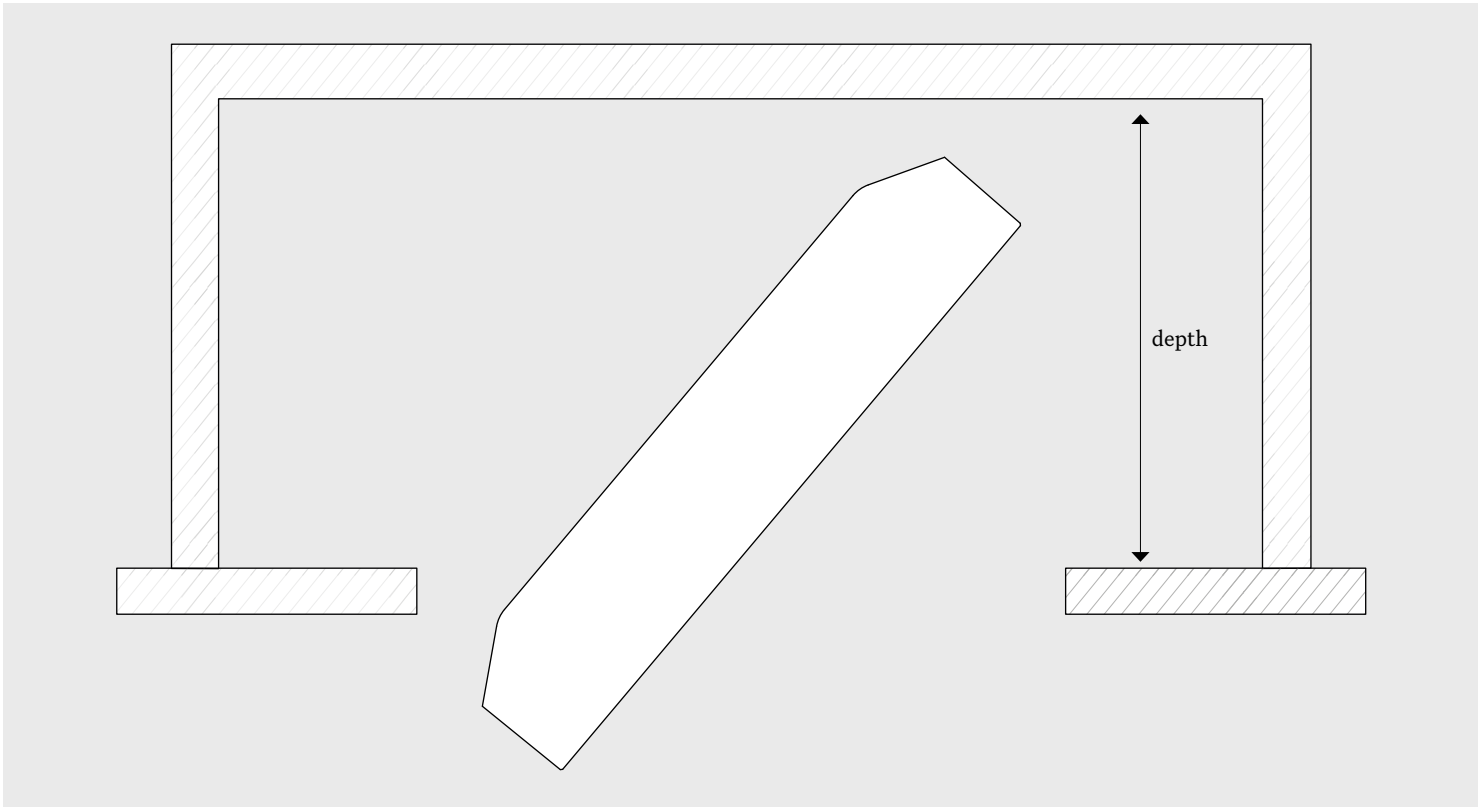


free air dimensions (l x w)

	remote driver	local driver
350mA	150 x 150 mm	250 x 250 mm
500mA	150 x 150 mm	250 x 250 mm
700mA	200 x 200 mm	250 x 250 mm

remote driver

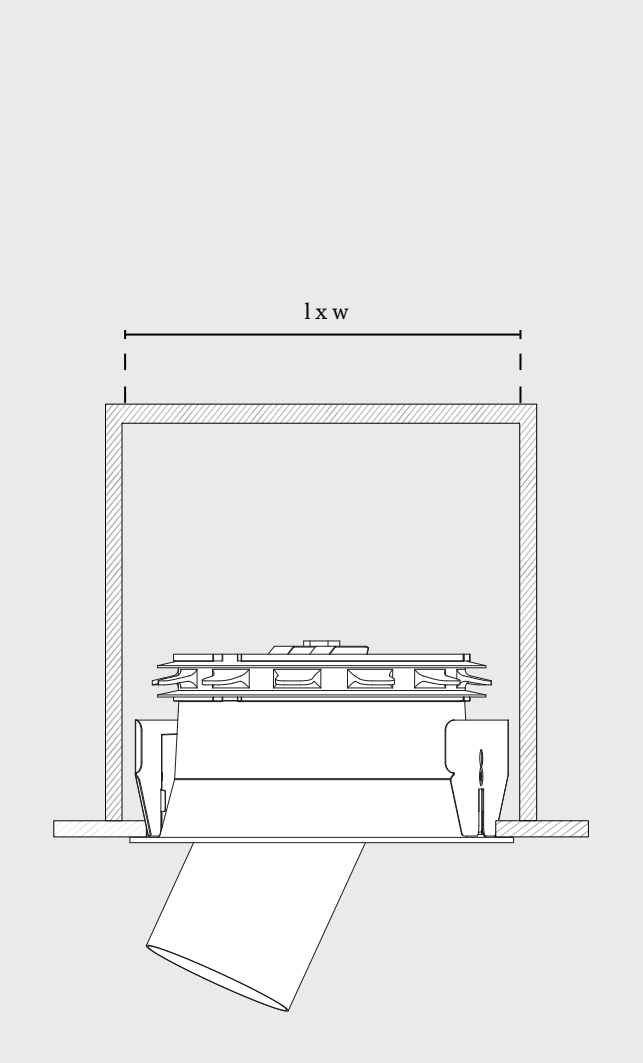


local driver

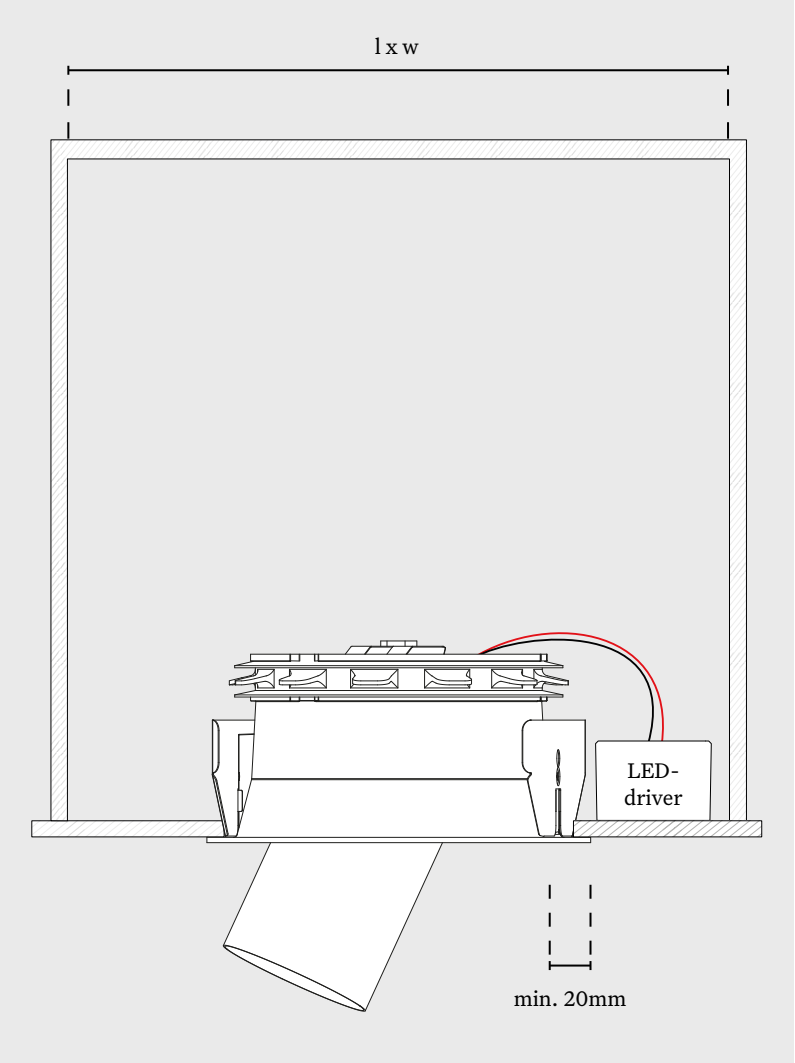

wiring diagram

serial connection

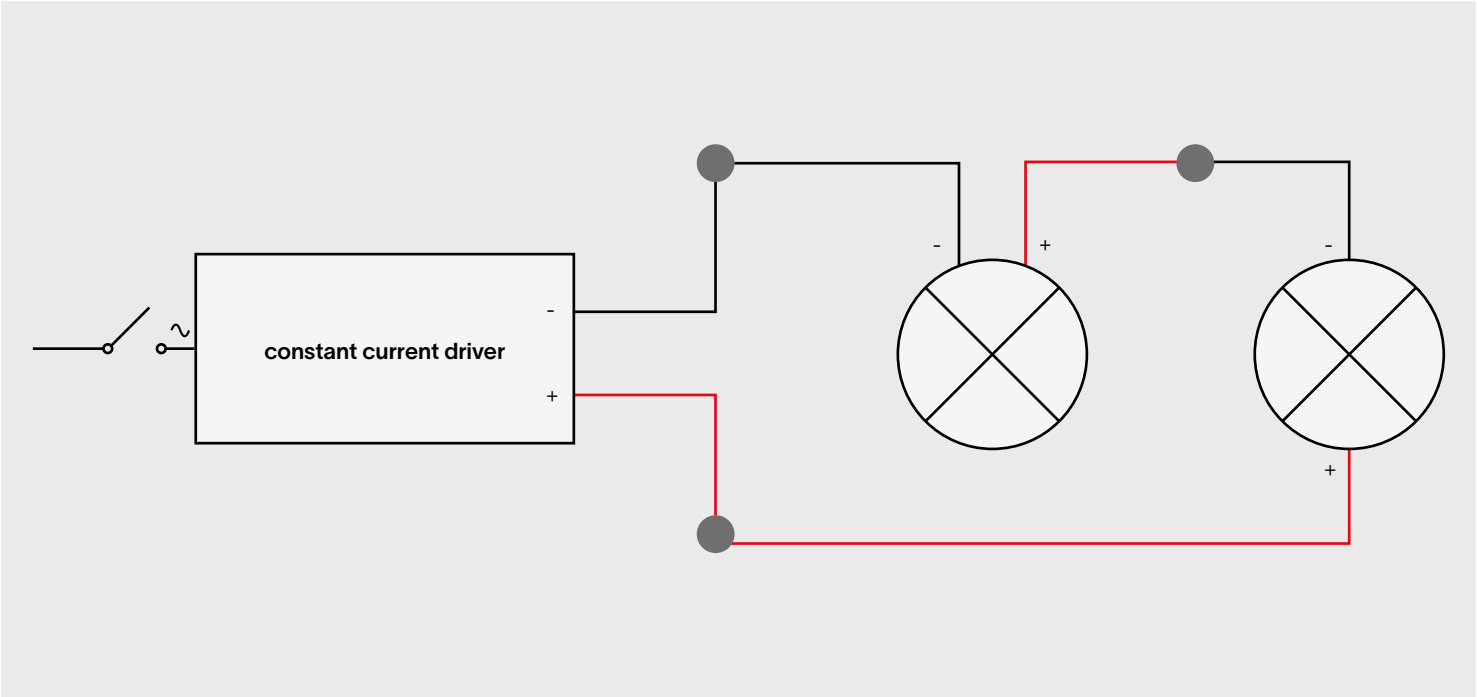

driver connections

© Prado Europe bv