


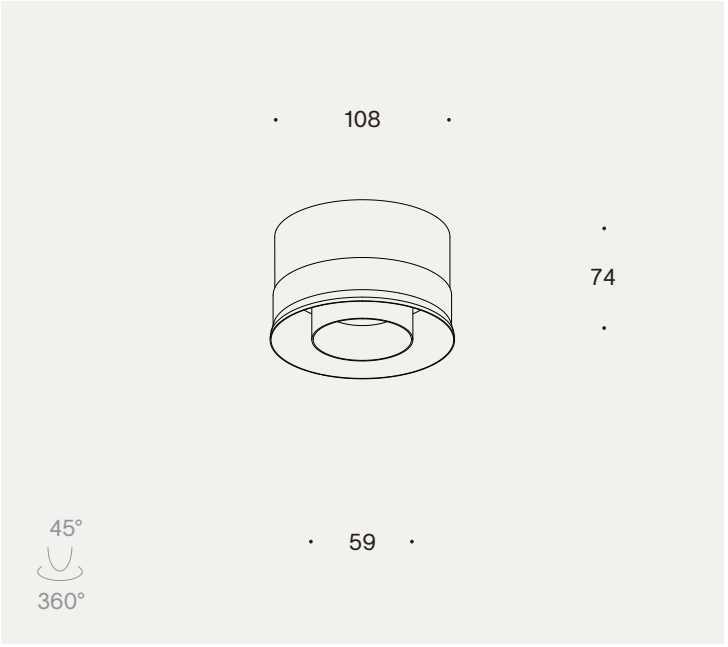

light only + motion short 2.0

installation

light specs

lamp	LED
optic	diffuser
driver	excluded
IP	20
CRI	90+
SDCM	SDCM2
class	class III
recess height	74
tilt	45°
location	indoor
marking	CE

luminaire output

	2700K	3000K
48V - 8.2W black ano	550lm	550lm
48V - 8.2W white struc	700lm	700lm

motion specs

motion detector	passive infrared sensor (PIR)
detection angle	h360 v100
light sensor	integrated
time on	5min after last movement detection
other	potential-free relay integrated
	patent pending

accessories

	installation
plaster ring Ø108	8000-0001
adjustable thick plaster ring Ø108 (12-33mm)	8000-0101
clt csc ring Ø108	8000-0011
concrete ring + cap Ø108	8000-0111
	drivers
48V driver 15W constant voltage	8000-0029
48V driver 70W constant voltage	8000-0024
48V driver 150W constant voltage	8000-0025
48V driver 240V constant voltage	8000-0033

© Prado Europe bv

We reserve the right, without notice, to change technical details if these, in our opinion do not change appearance or function of the product.