
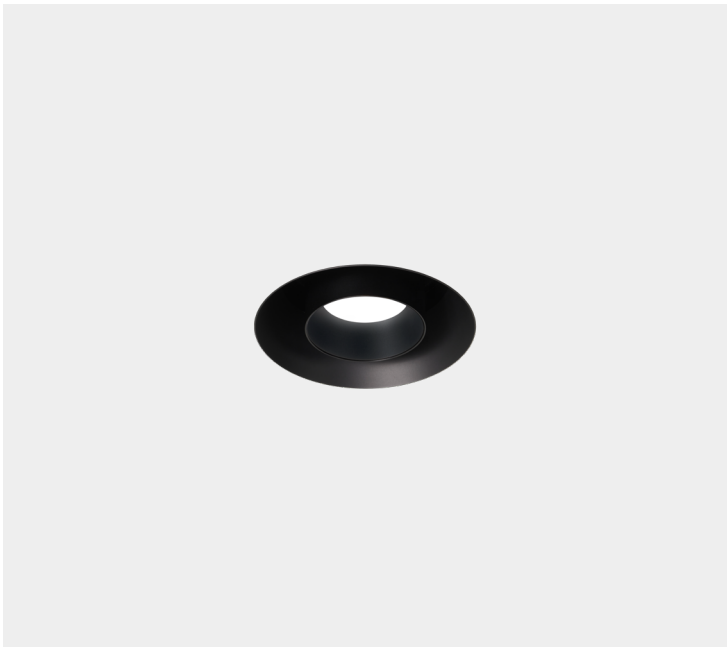


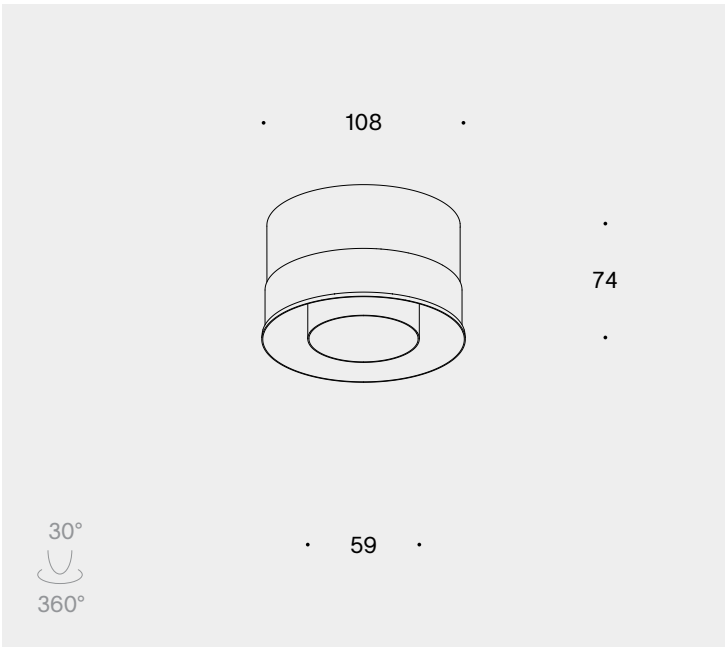


# light + motion + ventilation | short

installation

## light specs

| | |
|---|---|
| lamp | LED |
| optic | diffuser |
| driver | excluded |
| IP | 20 |
| CRI | 90+ |
| SDCM | SDCM2 |
| class | class III |
| tilt | 30° |
| location | indoor |
| marking | CE |

## motion specs

| | |
|---|---|
| motion detector | passive infrared sensor (PIR) |
| detection angle | h360 v100 |
| light sensor | integrated |
| time on | 5min after last movement detection |
| other | potential-free relay integrated |
| | patent pending |

## luminaire output

| | 2700K | 3000K |
|---|---|---|
| 48V - 8.2W black ano | 550lm | 550lm |
| 48V - 8.2W white struc | 700lm | 700lm |

## ventilation specs

| | | |
|---|---|---|
| type / air flow | air extraction | max. 55 $m^3/h$ |
| | air supply | max. 30 $m^3/h$ |
| pressure | 7-75Pa | |
| noise level | <25dB(A) | |
| adjustment | 32 steps | |
| lock mechanism | integrated | |


© Prado Europe bv

We reserve the right, without notice, to change technical details if these, in our opinion do not change appearance or function of the product.

air extraction

with 25m³/h ring

without 25m³/h ring

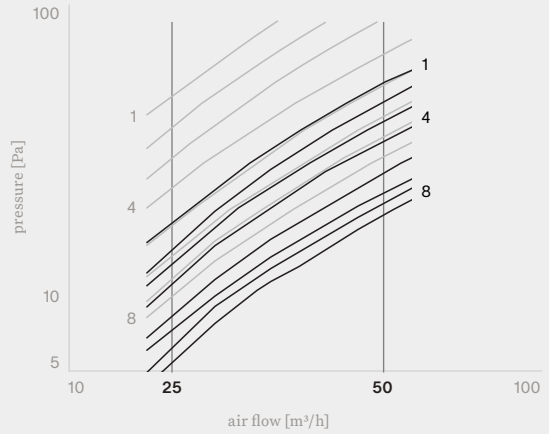



air supply*

downward airflow not suited for installation in or above comfort zones

with 25m³/h ring

without 25m³/h ring

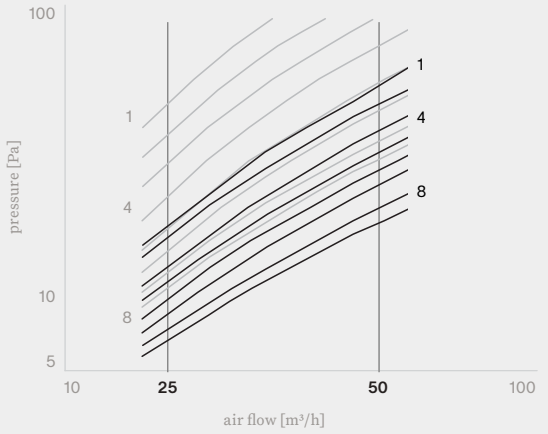


# light + motion + ventilation | short

installation

accessories

| | installation |
|---|---|
| plaster ring Ø108 | 8000-0001 |
| adjustable thick plaster ring Ø108 (12-33mm) | 8000-0101 |
| clt csc ring Ø108 | 8000-0011 |
| concrete ring + cap Ø108 | 8000-0111 |

| | drivers |
|---|---|
| 48V driver 15W constant voltage | 8000-0029 |
| 48V driver 70W constant voltage | 8000-0024 |
| 48V driver 150W constant voltage | 8000-0025 |
| 48V driver 240V constant voltage | 8000-0033 |

© Prado Europe bv

We reserve the right, without notice, to change technical details if these, in our opinion do not change appearance or function of the product.