


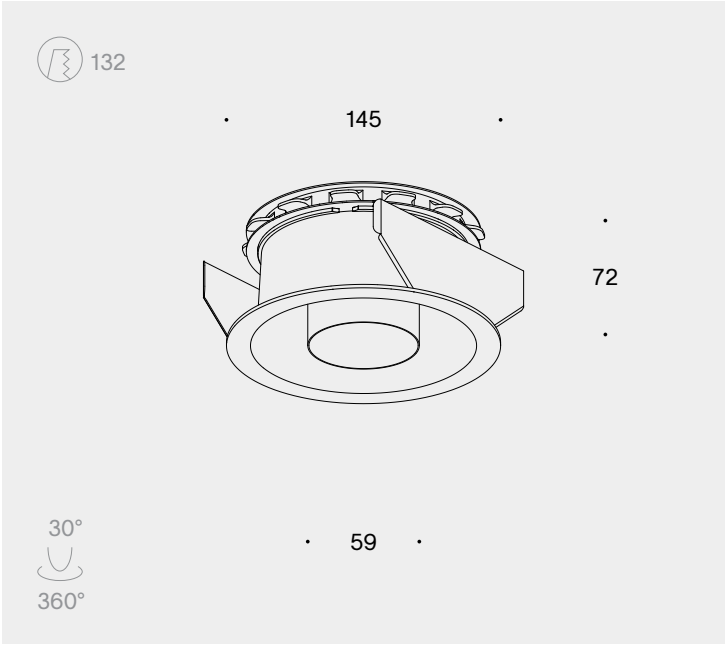

light+motion+ventilation | trim short

installation

light specs

lamp	LED
optic	diffuser
driver	excluded
IP	20
CRI	90+
SDCM	SDCM2
class	class III
drill hole size	132
tilt	30°
location	indoor
marking	CE

motion specs

motion detector	passive infrared sensor (PIR)
detection angle	h360 v100
light sensor	integrated
time on	5min after last movement detection
other	potential-free relay integrated
	patent pending

luminaire output

	2700K	3000K
48V - 8.2W black ano	550lm	550lm
48V - 8.2W white struc	700lm	700lm

ventilation specs

type / air flow	air extraction	max. 55 m^3/h
	air supply	max. 30 m^3/h
pressure	7-75Pa	
noise level	<25dB(A)	
adjustment	32 steps	
lock mechanism	integrated	


© Prado Europe bv

We reserve the right, without notice, to change technical details if these, in our opinion do not change appearance or function of the product.

air extraction

with 25m³/h ring

without 25m³/h ring

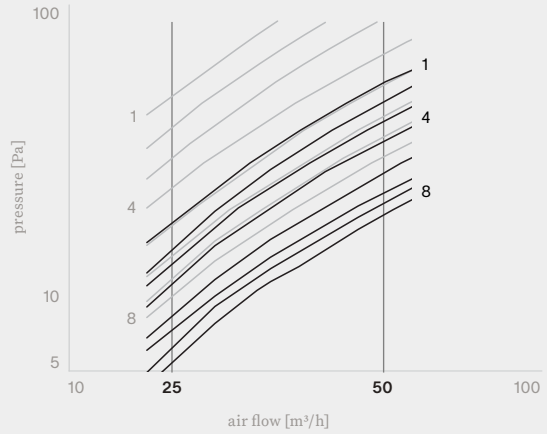


air supply*

downward airflow not suited for installation in or above comfort zones

with 25m³/h ring

without 25m³/h ring

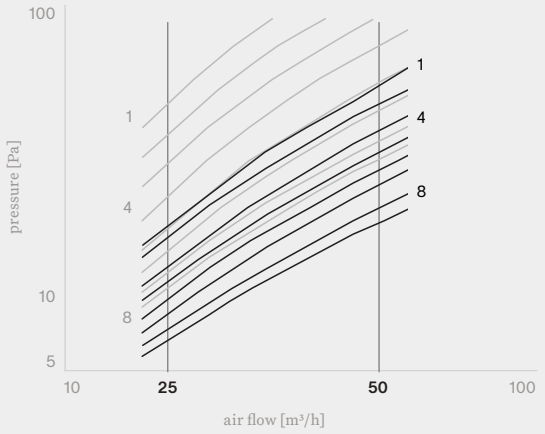

light+motion+ventilation | trim short

installation

accessories

	drivers
48V driver 15W constant voltage	8000-0029
48V driver 70W constant voltage	8000-0024
48V driver 150W constant voltage	8000-0025
48V driver 240V constant voltage	8000-0033

© Prado Europe bv

We reserve the right, without notice, to change technical details if these, in our opinion do not change appearance or function of the product.