


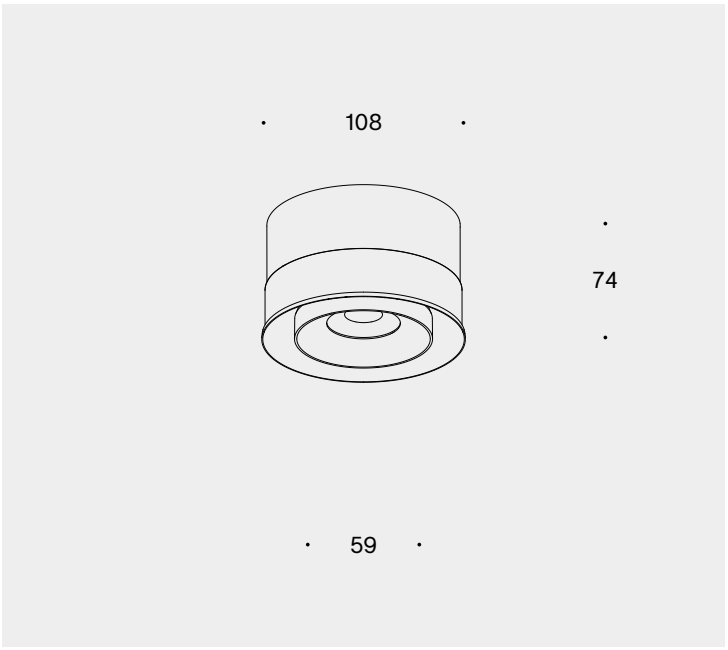

light + ventilation | SE

installation

light specs

lamp	LED
optic	lens
driver	excluded
IP	65
CRI	90+
SDCM	SDCM2
class	class III
location	indoor
marking	CE

ventilation specs

type / air flow	air extraction	max. 55 m^3/h
	air supply	max. 30 m^3/h
pressure	7-75Pa	
noise level	<25dB(A)	
adjustment	32 steps	
lock mechanism	integrated	

luminaire output

	2700K				3000K			
	15°	25°	40°	60°	15°	25°	40°	60°
350mA (5.7W)	-	625lm	625lm	-	-	675lm	675lm	-
500mA (8.5W)	-	825lm	825lm	-	-	875lm	875lm	-


© Prado Europe bv

We reserve the right, without notice, to change technical details if these, in our opinion do not change appearance or function of the product.

air extraction

with 25m³/h ring

without 25m³/h ring

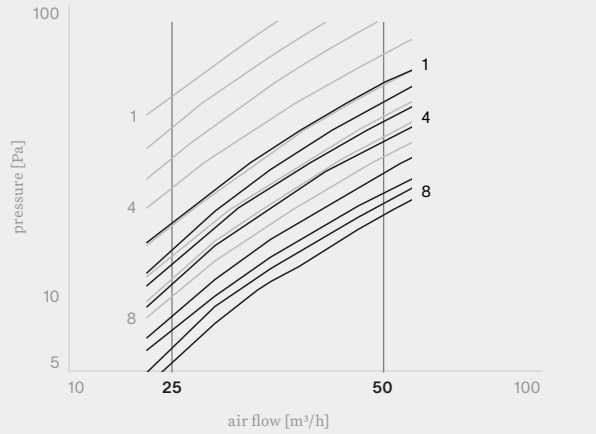


air supply*

downward airflow not suited for installation in or above comfort zones

with 25m³/h ring

without 25m³/h ring

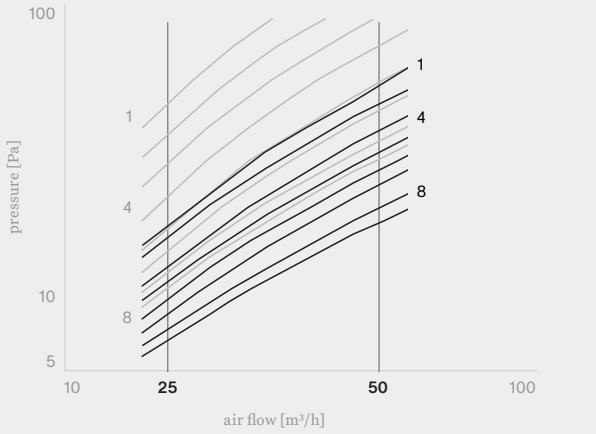

light + ventilation SE

installation

accessories

	installation
plaster ring Ø108	8000-0001
adjustable thick plaster ring Ø108 (12-33mm)	8000-0101
clt csc ring Ø108	8000-0011
concrete ring + cap Ø108	8000-0111

	drivers
DALI dimmable driver 38W	8000-0021
0-10V dimmable driver 36W	8000-0022
non-dimmable driver 42W	8000-0023
DALI dimmable driver 60W	8000-0026
DALI deep dim driver 20W	8000-0027

© Prado Europe bv

We reserve the right, without notice, to change technical details if these, in our opinion do not change appearance or function of the product.