


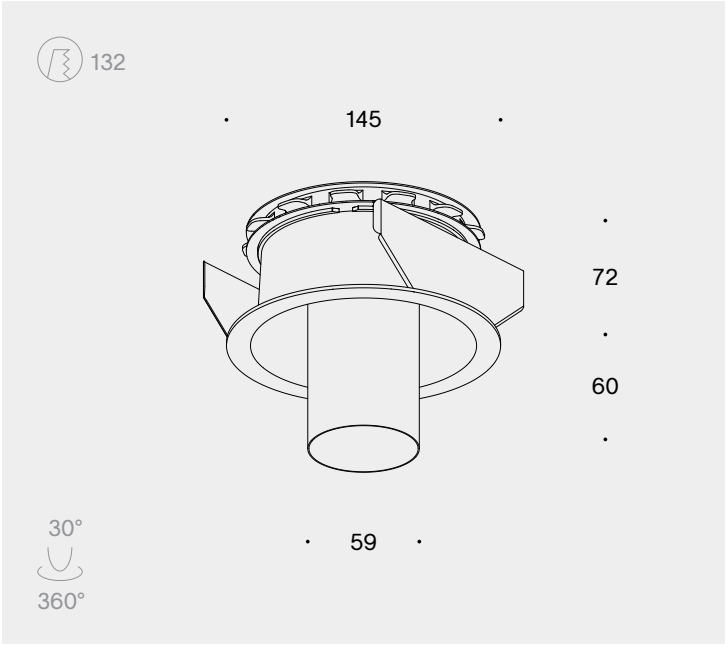

light + ventilation | trim long

installation

light specs

lamp	LED	
optic	glass lens	
driver	excluded	
IP	65	
CRI	90+	97
SDCM	SDCM2	
class	class III	
drill hole size	132	
tilt	30°	
location	indoor	
marking	CE	

ventilation specs

type / air flow	air extraction	max. 55 m^3/h
	air supply	max. 30 m^3/h
pressure	7-75Pa	
noise level	<25dB(A)	
adjustment	32 steps	
lock mechanism	integrated	

luminaire output

	2700K				3000K			
	15°	25°	40°	60°	15°	25°	40°	60°
350mA (5.7W)	290lm	420lm	585lm	585lm	325lm	460lm	645lm	645lm
500mA (8.5W)	450lm	555lm	730lm	730lm	495lm	610lm	805lm	805lm
700mA (12.8W)	505lm	720lm	955lm	955lm	560lm	795lm	1055lm	1055lm


© Prado Europe bv

We reserve the right, without notice, to change technical details if these, in our opinion do not change appearance or function of the product.

air extraction

with 25m³/h ring

without 25m³/h ring

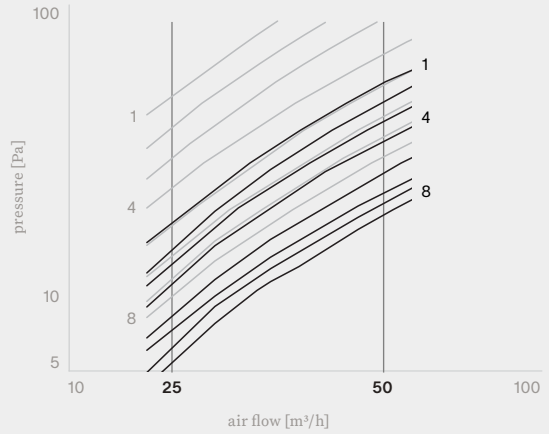


air supply*

downward airflow not suited for installation in or above comfort zones

with 25m³/h ring

without 25m³/h ring

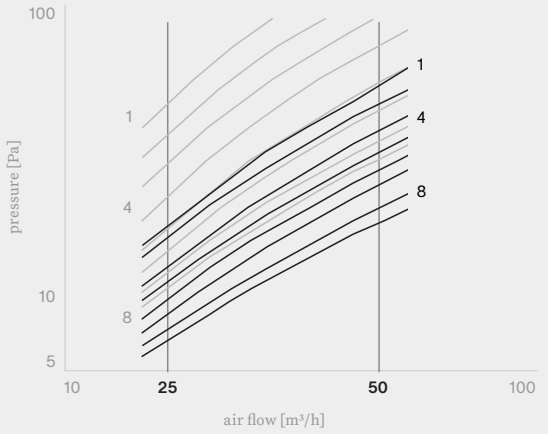

light + ventilation | trim long

installation

accessories

	drivers
DALI dimmable driver 38W	8000-0021
0-10V dimmable driver 36W	8000-0022
non-dimmable driver 42W	8000-0023
DALI dimmable driver 60W	8000-0026
DALI deep dim driver 20W	8000-0027

© Prado Europe bv

We reserve the right, without notice, to change technical details if these, in our opinion do not change appearance or function of the product.