


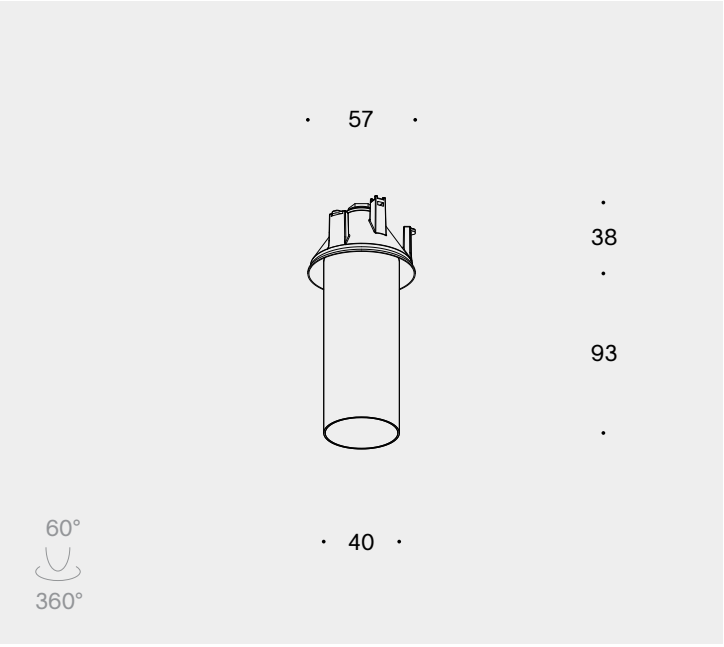

pradocam mini | long

camera specs

type	IP camera
resolution	4MP (2688x1520)
frame rate	25/30fps
field of view	h101° v57°
power supply	12V DC/PoE
image sensor	1/2.7" CMOS
IP	IP67
recess height	45
tilt	60°
location	indoor
marking	CE

functions

smart codec	H.265+/H.264+
face detection (AI)	detects, tracks and captures faces
face attributes (AI)	recognises gender, age, glasses, ...
perimeter protection (AI)	recognises humans and vehicles
wide dynamic range	120dB

network

network port	RJ-45 (10/100 Base-T)
SDK / API	yes
storage	FTP - SFTP - Micro SD card - NAS
software	Smart PSS - DSS - DMSS
mobile client	iOS, Android


alarm specs

motion detection	included (4 areas)
audio detection	included
privacy masking	included (4 areas)
alarm event	SD card full, network disconnection, motion detection, intrusion, missing object, audio detection

© Prado Europe bv

We reserve the right, without notice, to change technical details if these, in our opinion do not change appearance or function of the product.



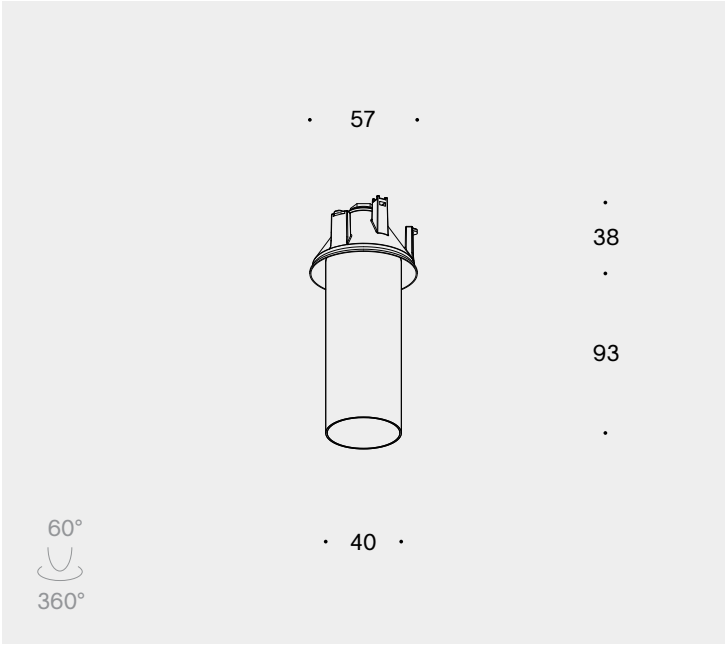

pradocam mini | long

accessories

	installation
plaster ring Ø57	8000-0003
adjustable thick plaster ring Ø57 (12-33mm)	8000-0103
adjustable thin plaster ring Ø57 (3.6-20mm)	8000-0123
clt csc ring Ø57	8000-0013
concrete ring + cap Ø57	8000-0113
pradocam main unit - single (required)	8001-7437
pradocam main unit - 4-fold (required)	8001-7438

© Prado Europe bv

We reserve the right, without notice, to change technical details if these, in our opinion do not change appearance or function of the product.