
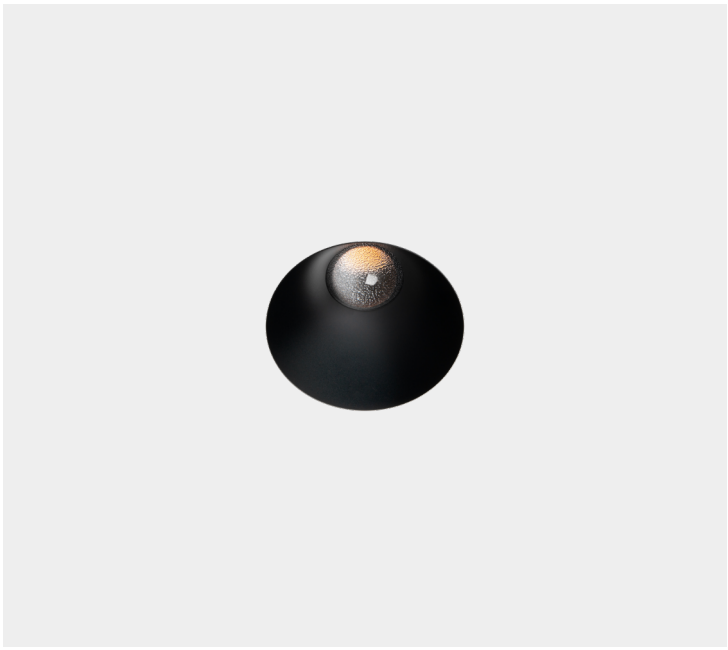


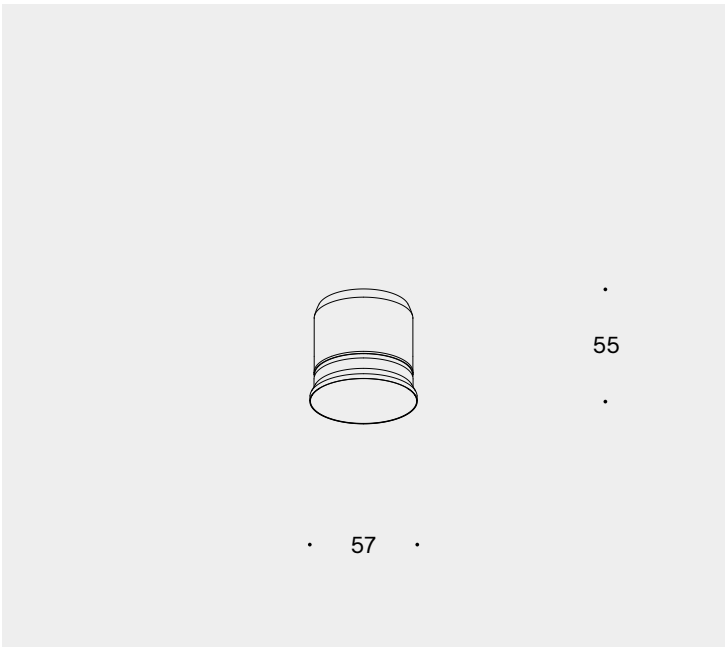


# trimless spot | short

installation

## light specs


| | | |
|---|---|---|
| lamp | LED | |
| optics | 25° glass | 40° glass |
| | 60° glass | |
| driver | excluded | |
| IP | IP44 (60° glass) | IP65 (25°, 40° glass) |
| CRI | 90+ | 97 |
| SDCM | SDCM2 | |
| class | class III | |
| recess height | 55 | |
| location | indoor | |
| marking | CE | |


## installation rings

| | product code |
|---|---|
| plaster ring Ø57 | 8000-0003 |
| adj. thick plaster ring Ø57 (12-33mm) | 8000-0103 |
| adj. thin plaster ring Ø57 (3.6-20mm) | 8000-0123 |
| clt csc ring Ø57 | 8000-0013 |
| concrete ring + cap Ø57 | 8000-0113 |

© Prado Europe bv

We reserve the right, without notice, to change technical details if these, in our opinion do not change appearance or function of the product.

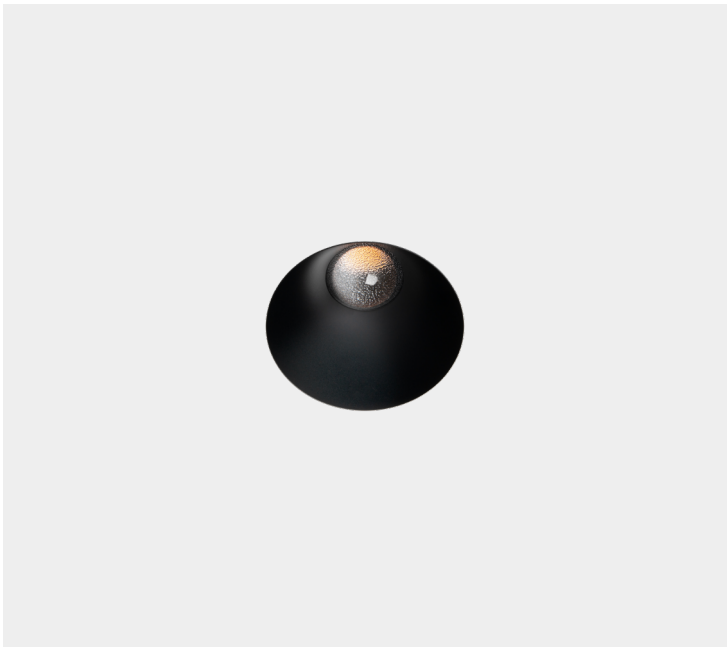

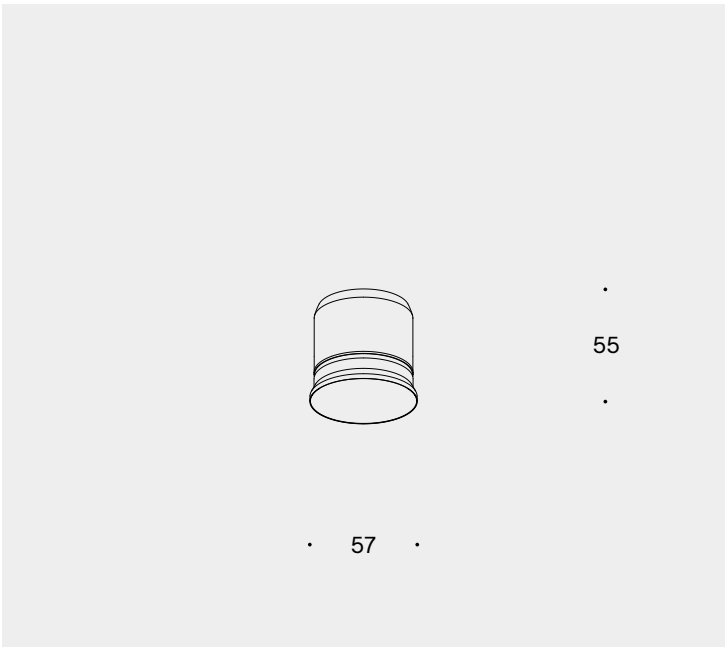


# trimless spot | short

## luminaire output

| | 2700K | | | 3000K | | |
|---|---|---|---|---|---|---|
| | 25° glass | 40° glass | 60° glass | 25° glass | 40° glass | 60° glass |
| 350mA (6.0W) | 375lm | 500lm | 500lm | 400lm | 525lm | 525lm |
| 500mA (8.9W) | 550lm | 700lm | 675lm | 575lm | 725lm | 700lm |

## constant current drivers

| | product code |
|---|---|
| DALI dimmable driver 38W | 8000-0021 |
| 0-10V dimmable driver 36W | 8000-0022 |
| non-dimmable driver 42W | 8000-0023 |
| Casambi dimmable driver 38W | 8000-0028 |
| DALI dimmable driver 60W | 8000-0026 |
| DALI deep dim driver 20W - 350mA | 8000-0031 |
| DALI deep dim driver 20W - 500mA | 8000-0030 |
| DALI dimmable power converter 48V to 350-700mA | 8000-0037 |

| | product code |
|---|---|
| TRIAC dimmable driver 7W - 350mA | 8000-0034 |
| TRIAC dimmable driver 10W - 500mA | 8000-0035 |
| TRIAC dimmable driver mini 10W - 350mA | 8000-0043 |
| TRIAC dimmable driver mini 10W - 500mA | 8000-0044 |

© Prado Europe bv We reserve the right, without notice, to change technical details if these, in our opinion do not change appearance or function of the product.