steplight mini | trimless

We aim to create cleaner ceilings.
Show what you want, hide what you need.



© Prado Europe bv
We reserve the right to change technical details without notice if the product's appearance or functionality is unaffected.

luminaire specs 3


finishes 4


luminaire output 4

accessories & drivers 5

installation rings 6

© Prado Europe bv We reserve the right to change technical details without notice if the product's appearance or functionality is unaffected.

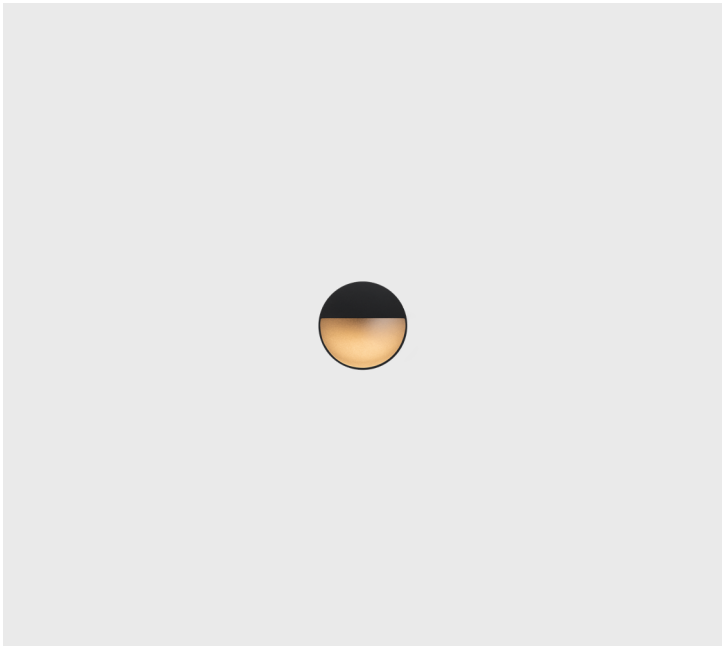

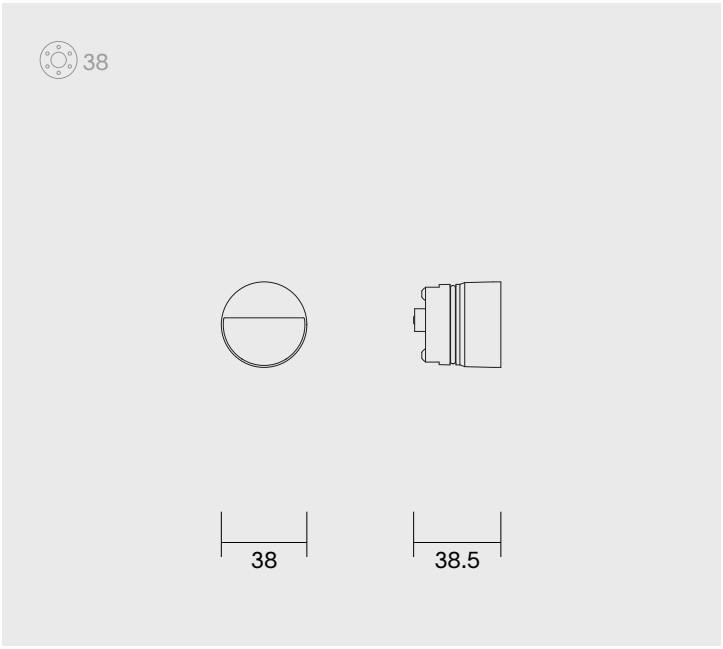

steplight mini | trimless

installation

luminaire specs

delivered lumen	up to 20lm
watts	up to 1.2W
efficacy	up to 14lm/W
lamp	LED
optics	diffuser
driver	excluded
IP	IP20
CRI/Ra	CRI 90+
R9 value	CRI 90+: >50
color temperature (CCT)	2700K 3000K
color consistency	SDCM2
class	III
recess depth	38.5 mm
installation depth	driver remote: 43.5 mm
location	indoor
energy class	F
marking	CE
L80	>55000 h

installation rings (not incl.)	plaster ring Ø38	↗
	adj. thin plaster ring Ø38	↗
	clt csc ring Ø38	↗
aluminum finishes	black ano	white struc
aluminum weight	0.05 kg	
brass finishes	brushed nickel	light bronze
	dark bronze	canon de fusil dark
	canon de fusil light	
brass weight	0.06 kg	
warranty	2 years (5 years on LED)	↗

Respect distances, cable sections and IP ratings.
Split AC and DC to prevent LED glowing.

© Prado Europe bv We reserve the right to change technical details without notice if the product's appearance or functionality is unaffected.

finishes

aluminum finishes

white struc (RAL 9003)



black ano



brass finishes

brushed nickel



light bronze



dark bronze



canon de fusil light




canon de fusil dark




Custom RAL and brass finishes available on request.

correlated color temperature (CCT)

2700K: extra warm white




3000K: warm white



luminaire output

	(24V, 1.2W)
2700K	20lm
3000K	20lm

diffuser

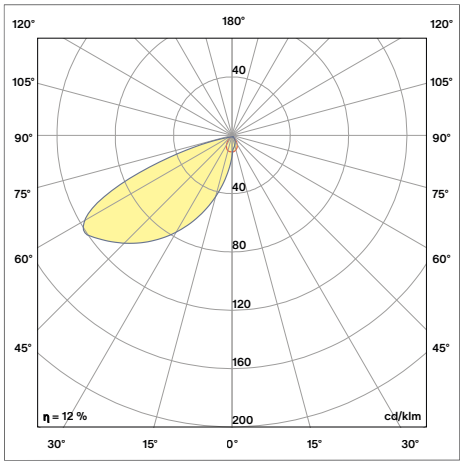

accessories

trimless installation rings (not incl.)

	application	drill hole	product code	spec sheet
plaster ring Ø38	plastered ceiling	Ø76 mm	8000-0004	↗
adj. thin plaster ring Ø38 (3.6 - 20 mm)	plastered ceiling	Ø76 mm	8000-0124	↗
clt csc ring Ø38 (before claring ceiling)	CLT / CSC	consult installation	8000-0014	↗

drivers (not incl.)


	IP rating	product code	installation
IP68 24V constant voltage DALI pwm driver 60W	IP67	8000-0040	remote only
IP68 24V constant voltage DALI pwm driver 120W	IP67	8000-0041	remote only
IP68 24V constant voltage DALI pwm push driver 200W	IP67	8000-0042	remote only

© Prado Europe bv We reserve the right to change technical details without notice if the product's appearance or functionality is unaffected.

trimless installation rings (not incl.)

	application	drill hole	product code	spec sheet
plaster ring Ø38	plastered wall	Ø76 mm	8000-0004	↗
adj. thin plaster ring Ø38 (3.6 - 20 mm)	plastered wall	Ø76 mm	8000-0124	↗
clt csc ring Ø38 (before claring ceiling)	CLT / CSC	consult installation	8000-0014	↗


plastered ceiling

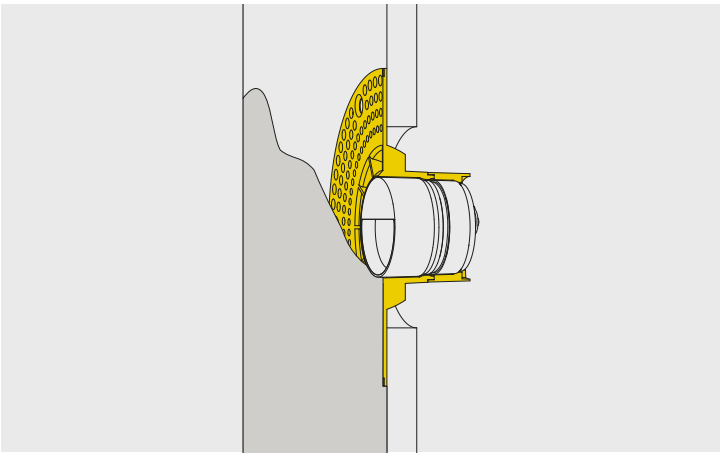

plaster ring Ø38

installation

location	wall indoor	
plaster thickness	3.6 mm	
drill hole	Ø76 mm	
intallation depth	43.5 mm	
trimless tool (not incl.)	Ø38 / Ø57 / jack	8000-0098

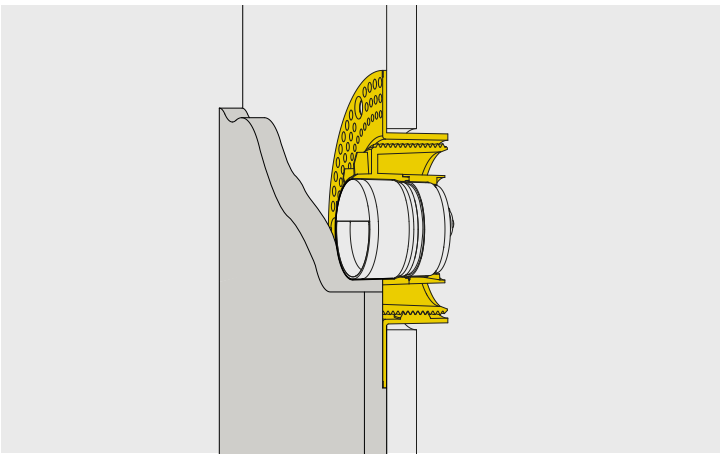

adj. thin plaster ring Ø38

installation


location	wall indoor	
plaster thickness	min. 3.6 mm	max. 20 mm
drill hole	Ø76 mm	
intallation depth	43.5 mm	
trimless tool (not incl.)	Ø38 / Ø57 / jack	8000-0098

© Prado Europe bv
We reserve the right to change technical details without notice if the product's appearance or functionality is unaffected.

clt csc ceiling

installation clt

installation csc

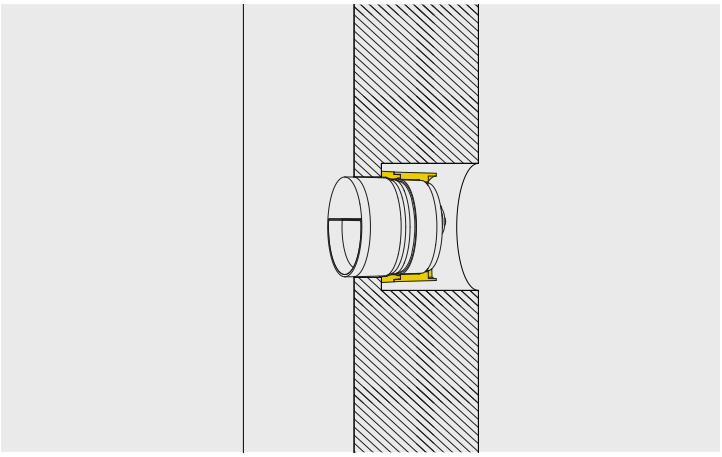


clt csc ring Ø38

location	wall indoor
cut-out	consult installation

wiring diagram

parallel connection

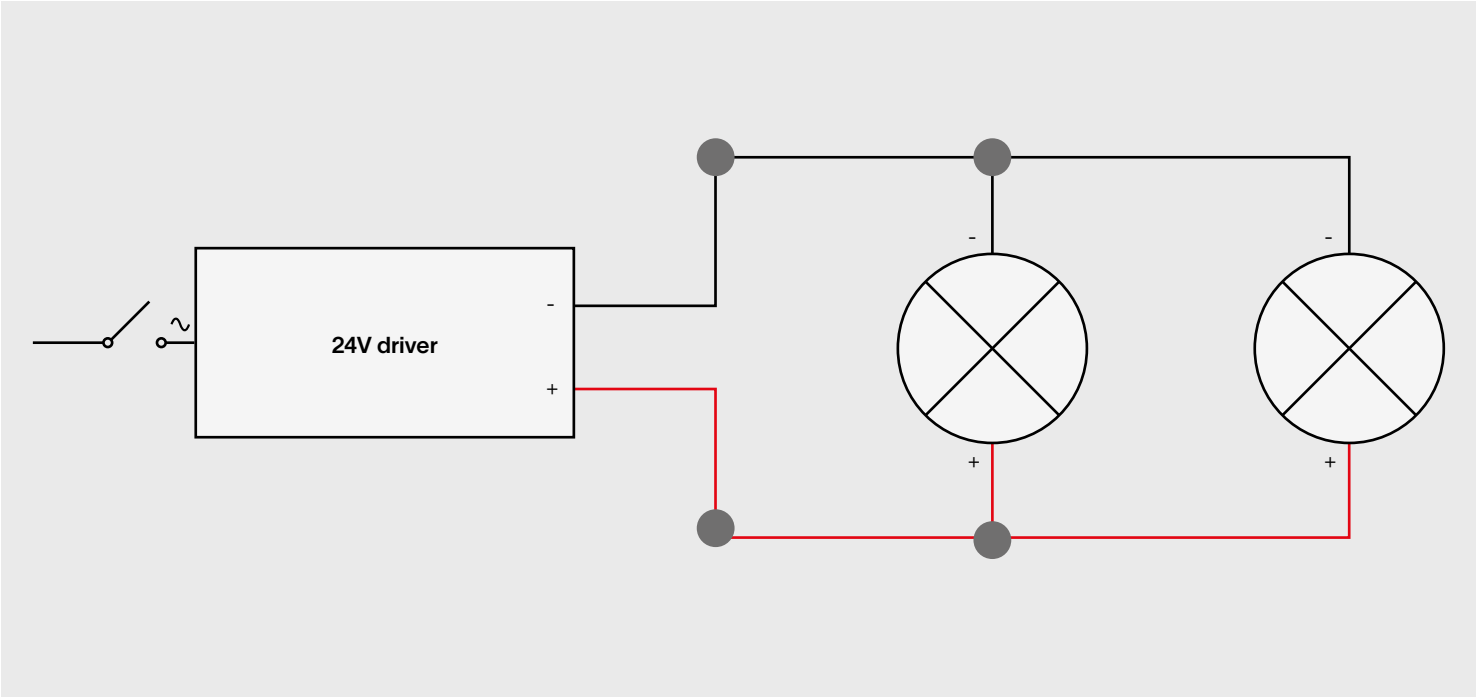

© Prado Europe bv We reserve the right to change technical details without notice if the product's appearance or functionality is unaffected.