


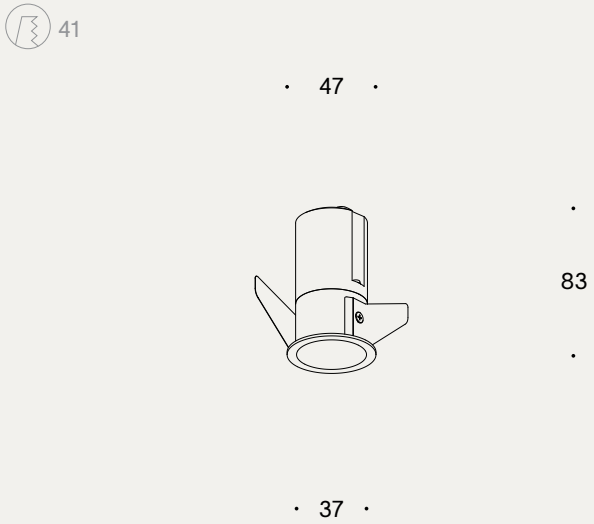

trim spot mini outdoor | long

installation

light specs

lamp	LED	
optic	glass lens	
driver	excluded	
IP	65	
CRI	90+	97
SDCM	SDCM2	
class	class III	
drill hole size	41	
recess height	90	
location	ceiling outdoor	
marking	CE	

accessories

	driver
IP68 non-dimmable driver 42W 500mA	8000-0038
IP68 DALI dimmable driver 38W 500mA	8000-0039
DALI dimmable driver 38W	8000-0021
0-10V dimmable driver 36W	8000-0022
non-dimmable driver 42W	8000-0023
DALI dimmable driver 60W	8000-0026
DALI deep dim driver 20W	8000-0027

luminaire output

	2700K				3000K			
	15°	25°	40°	60°	15°	25°	40°	60°
350mA (5.7W)	-	-	525lm	-	-	-	550lm	-
500mA (8.5W)	-	-	710lm	-	-	-	750lm	-

© Prado Europe bv

We reserve the right, without notice, to change technical details if these, in our opinion do not change appearance or function of the product.