


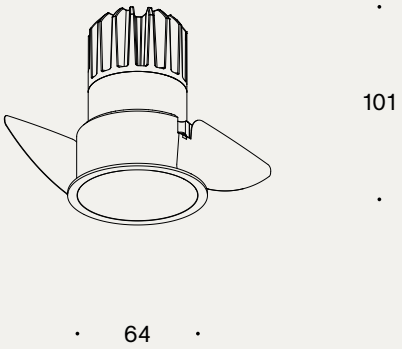

trim spot outdoor long

installation

light specs

lamp	LED	
optic	glass lens	
driver	excluded	
IP	65	
CRI	90+	97
SDCM	SDCM2	
class	class III	
drill hole size	68	
recess height	100	
location	ceiling outdoor	
marking	CE	

accessories

	driver
IP68 non-dimmable driver 42W 500mA	8000-0038
IP68 DALI dimmable driver 38W 500mA	8000-0039
DALI dimmable driver 38W	8000-0021
0-10V dimmable driver 36W	8000-0022
non-dimmable driver 42W	8000-0023
DALI dimmable driver 60W	8000-0026
DALI deep dim driver 20W	8000-0027

luminaire output

	2700K		3000K	
	25°	40°	25°	40°
350mA (6.0W)	375lm	475lm	400lm	500lm
500mA (8.9W)	550lm	650lm	575lm	675lm
700mA (13.0W)	725lm	875lm	750lm	925lm

© Prado Europe bv

We reserve the right, without notice, to change technical details if these, in our opinion do not change appearance or function of the product.