
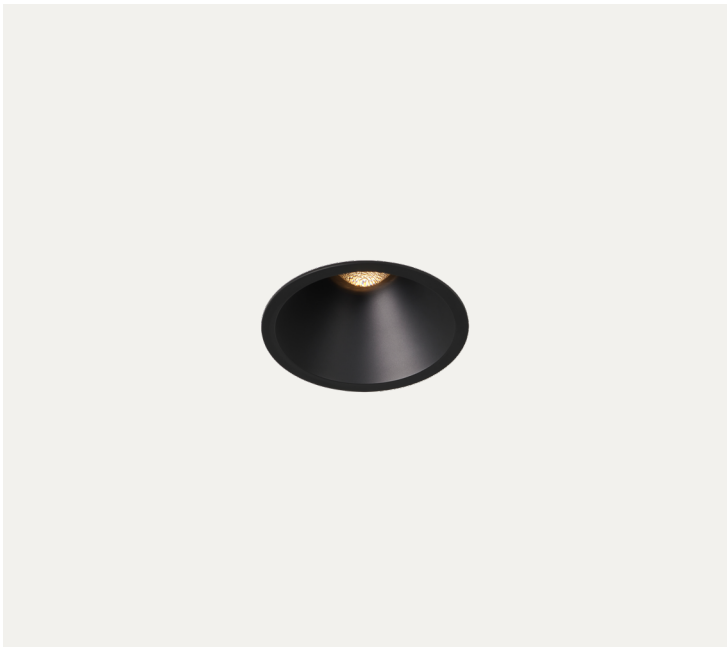


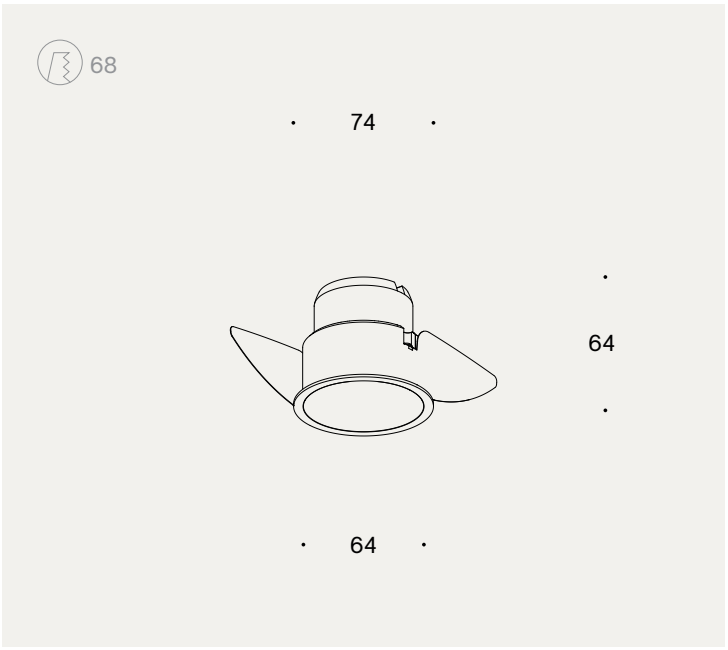

trim spot outdoor short

installation

light specs

lamp	LED	
optic	glass lens	
driver	excluded	
IP	65	
CRI	90+	97
SDCM	SDCM2	
class	class III	
drill hole size	68	
recess height	63	
location	ceiling outdoor	
marking	CE	

accessories

	driver
IP68 non-dimmable driver 42W 500mA	8000-0038
IP68 DALI dimmable driver 38W 500mA	8000-0039
DALI dimmable driver 38W	8000-0021
0-10V dimmable driver 36W	8000-0022
non-dimmable driver 42W	8000-0023
DALI dimmable driver 60W	8000-0026
DALI deep dim driver 20W	8000-0027

luminaire output

	2700K		3000K	
	25°	40°	25°	40°
350mA (6.0W)	375lm	500lm	400lm	525lm
500mA (8.9W)	550lm	700lm	575lm	725lm

© Prado Europe bv

We reserve the right, without notice, to change technical details if these, in our opinion do not change appearance or function of the product.