
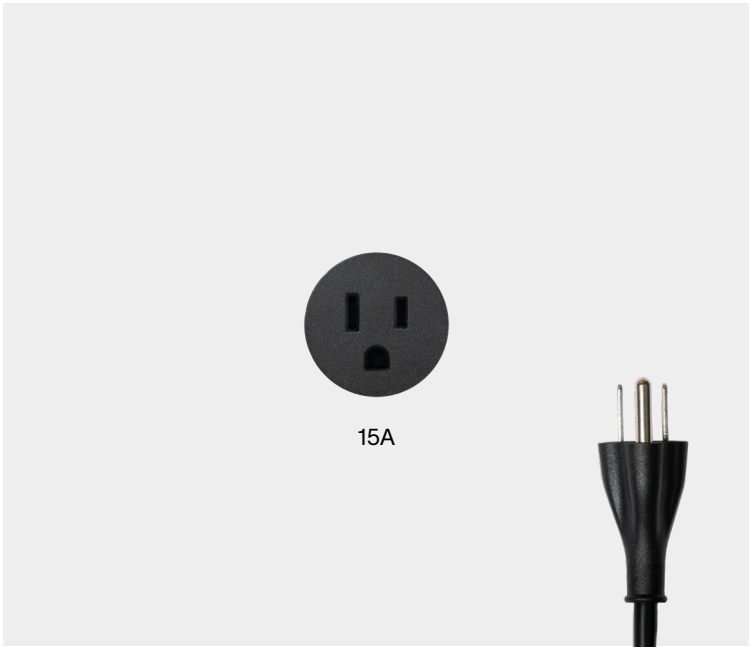


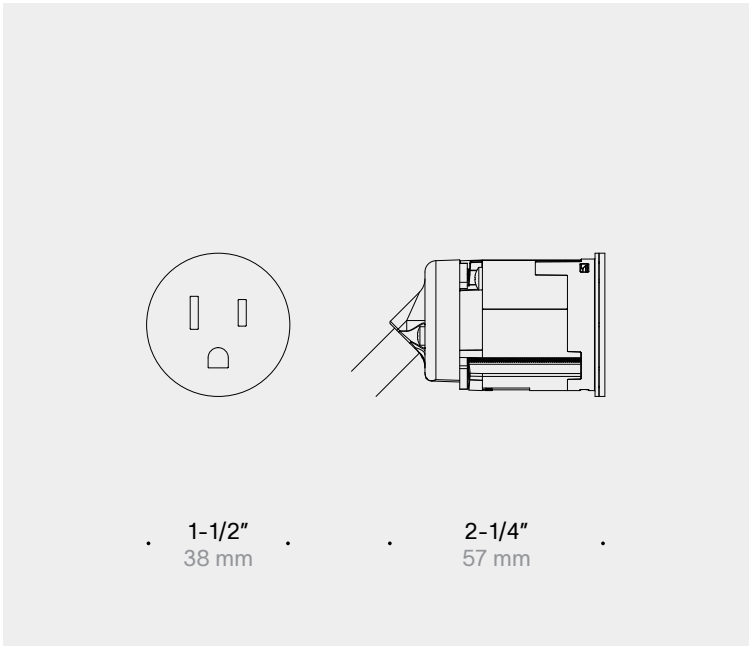

unifit outlet | single corded

installation

outlet specs

application	drywall, wood and stone
electrical details	15A - 125V NEMA 5-15
cut-out	Ø1-3/8″ hole
panel thickness	1/4 to 1-3/8″ (adjustable lugs)
comes with	5ft. cable and plug
cover plate	required, not included
other	patent pending
	tamper resistant

order number


	product code
unifit outlet | single - corded	9000-0001


Intertek
5029983

CONFORMS TO UL STD. 962A
CERTIFIED TO CSA STD. C22.2#308

© prado America LLC

We reserve the right, without notice, to change technical details if these, in our opinion do not change appearance or function of the product.

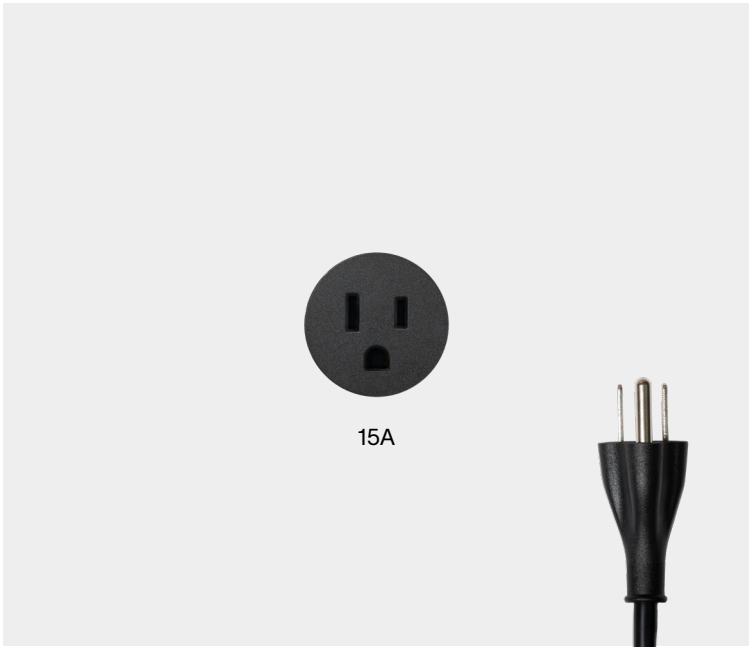

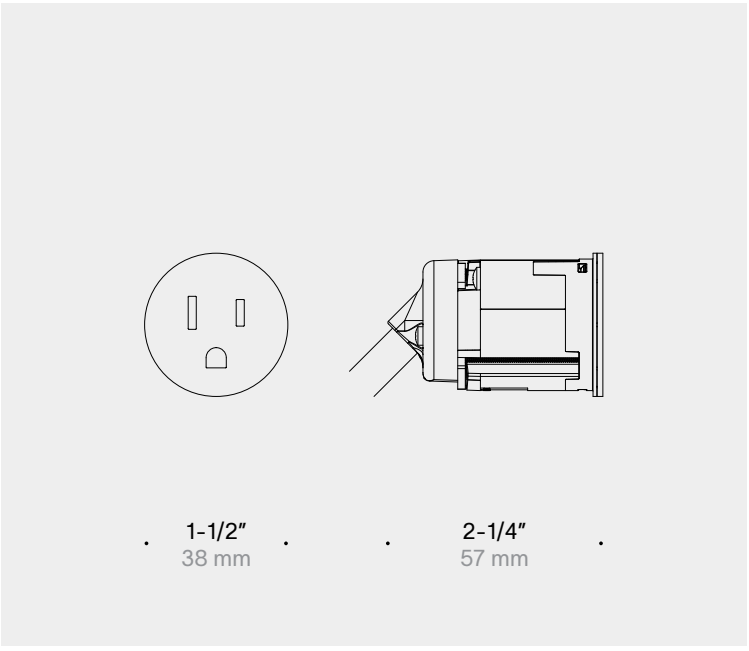

unifit outlet | single corded

unifit cover plate (not incl.)

	product code
	15A
white	9000-0022
sand	9000-0024
clay	9000-0026
stone	9000-0126
espresso	9000-1022
graphite	9000-1024
black	9000-0020

accessories (not incl.)

	product code
forstner bit 1-3/8" (35 mm)	9000-0116
forstner bit 1-3/8" (38 mm)	9000-0015
rabbeting router bit 1/16"	8800-2716
countersink core bit	9100-0231

Intertek
5029983

CONFORMS TO UL STD. 962A
CERTIFIED TO CSA STD. C22.2#308

© prado America LLC

We reserve the right, without notice, to change technical details if these, in our opinion do not change appearance or function of the product.