


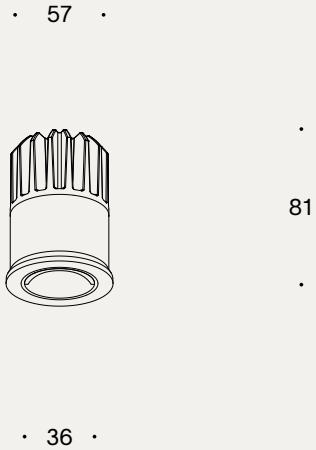

wallwash | trimless

installation

light specs

lamp	LED	
optic	asymmetric reflector	
driver	excluded	
IP	20	
CRI	90+	97
SDCM	SDCM2	
class	class III	
recess height	81	
location	indoor	
marking	CE	

accessories

	installation
plaster ring Ø57	8000-0003
adjustable thick plaster ring Ø57 (12-33mm)	8000-0103
adjustable thin plaster ring Ø57 (3.6-20mm)	8000-0123
clt csc ring Ø57	8000-0013

	drivers
DALI dimmable driver 38W	8000-0021
0-10V dimmable driver 36W	8000-0022
non-dimmable driver 42W	8000-0023
DALI dimmable driver 60W	8000-0026
DALI deep dim driver 20W	8000-0027

luminaire output

	2700K	3000K
350mA (5.7W)	605lm	655lm
500mA (8.5W)	755lm	805lm

© Prado Europe bv We reserve the right, without notice, to change technical details if these, in our opinion do not change appearance or function of the product.