


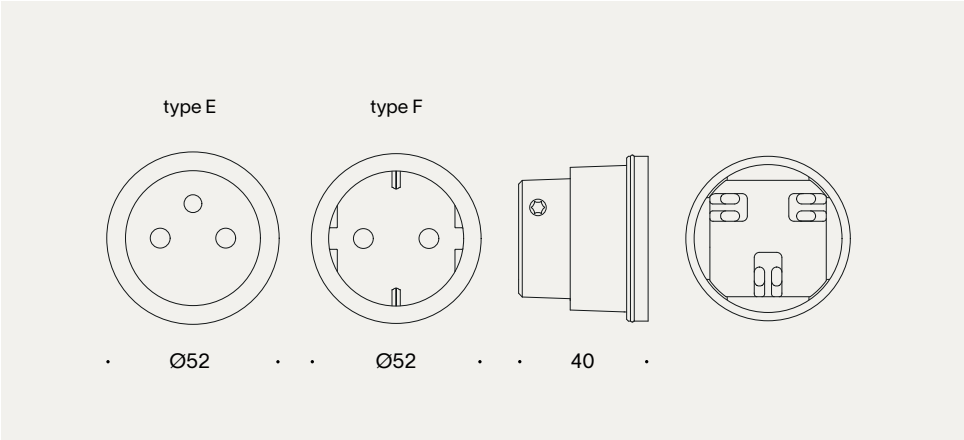

socket 2.0 multifit type E/F

installation

socket specs

application	16A / 250V
flush-mounting depth	55 mm
wire stripping length	13.8 mm
wire capacity	up to 4 x 2.5 mm^2 per terminal
wire fixation	screw terminals (TX8)
ambient temperature	-5 till +40°C
IP, IK rating	IP21-D IK06
marking	CE

accessories

multifit holder 2.0	8800-2012
removal tool 2.0	8800-2010

mounting dimensions

installation hole	Ø48
panel thickness	min. 8 mm - max. 30 mm
flush mount countersink	Ø52.5 x 2 mm depth (optional)

© Shiver NV

We reserve the right, without notice, to change technical details if these, in our opinion do not change appearance or function of the product.