
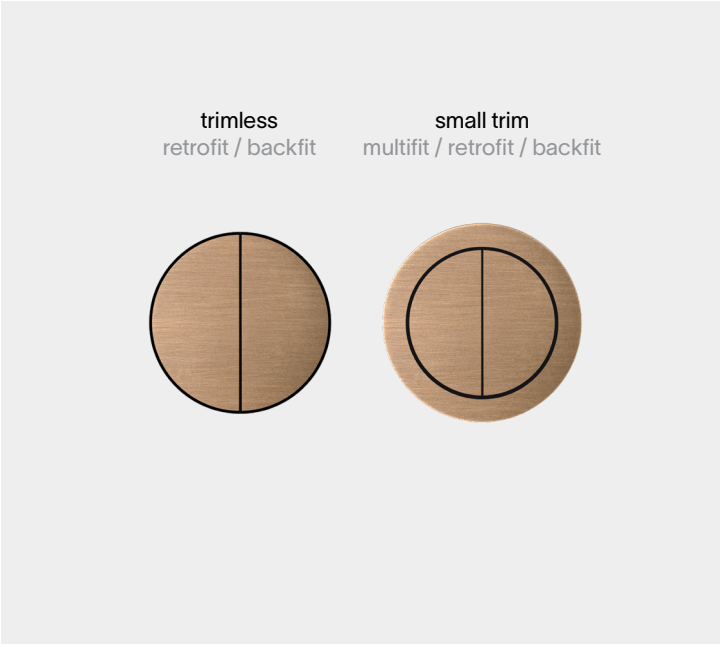


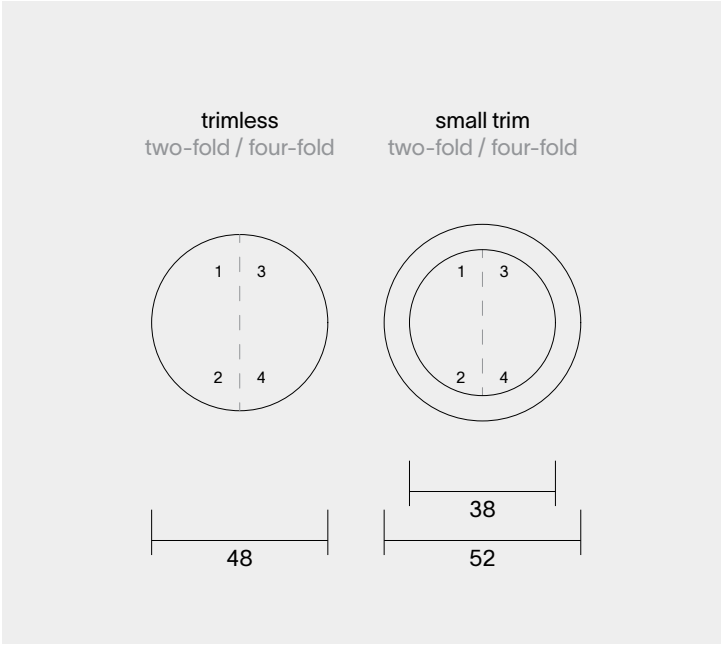

rond 2.0 push button PF - KNX

installation PF

installation KNX

push button specs

type	PF (potential-free), 24V, NO	
	KNX push button	
flush-mounting depth	retrofit / backfit	36 mm
	multifit	55 mm
adjustability	every 45° rotatable	
ambient temperature	-5°C till +40°C	
IP / IK rating	IP21-D	IK06
marking	CE	

accessories

	product code
retrofit plaster ring 2.0	8800-2011
backfit holder 2.0	8800-2016
multifit holder 2.0	8800-2012
removal tool 2.0	8800-2010

PF (potential-free) specs

wire capacity per terminal	min. 0.2 mm²	max. 1.5 mm²
wire fixation	plug in terminals	

KNX specs

wiring	KNX bus
wire stripping length	5 - 6 mm
bus current	< 10mA
class	class III
safety	KNX secure
KNX medium	TP256
relative humidity	max. 93%

© Shiver NV

We reserve the right to change technical details without notice if the product's appearance or functionality is unaffected.