


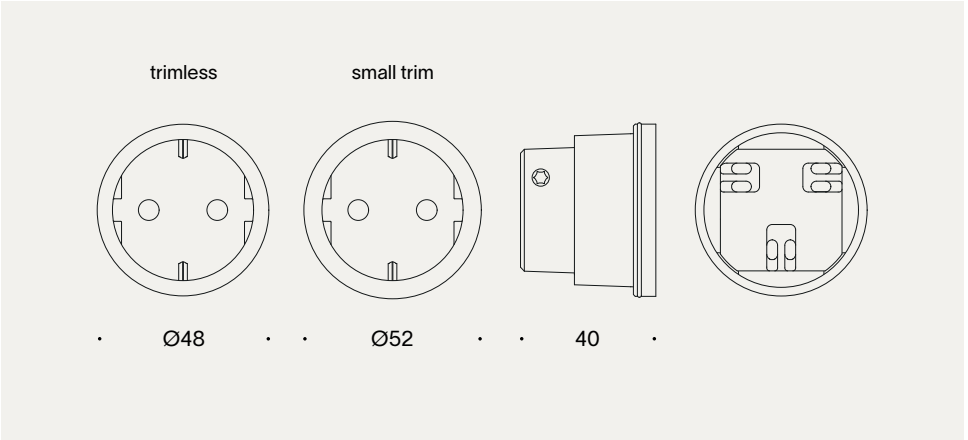

socket 2.0 retro-/backfit type F

installation

socket specs

application	16A / 250V
flush-mounting depth	40 mm
wire stripping length	13.8 mm
wire capacity	up to 4 x 2.5 mm² per terminal
wire fixation	screw terminals (TX8)
ambient temperature	-5 till +40°C
IP, IK rating	IP21-D IK06
marking	CE

accessories

retrofit plaster ring 2.0	8800-2011
backfit holder 2.0	8800-2016
removal tool 2.0	8800-2010

© Shiver NV

We reserve the right, without notice, to change technical details if these, in our opinion do not change appearance or function of the product.