


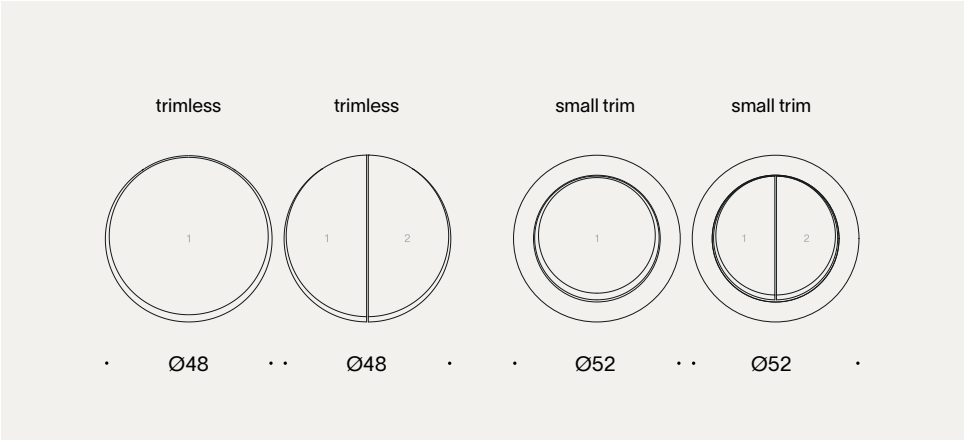

rond 2.0 switches 230V

installation

switch specs

application	10AX / 250V
flush-mounting depth	retrofit / backfit 40 mm
	multifit 55 mm
wire stripping length	10.5 mm
wire capacity	up to 2 x 2.5 mm^2 per terminal
wire fixation	screw terminals (TX8)
ambient temperature	-5 till +40°C
IP, IK rating	IP21-D IK06
marking	CE

accessories

retrofit plaster ring 2.0	8800-2011
multifit holder 2.0	8800-2012
backfit holder 2.0	8800-2016
removal tool 2.0	8800-2010

switches types

single-pole switch
two-pole switch
two-circuit switch
NO push button
double NO push button
two-way switch
double two-way switch
two-pole two-way switch
intermediate switch

compatibility

	retrofit/backfit	multifit
variant	trimless/small trim	small trim
basic black	✓	-
basic white	✓	-
black alu	✓	✓
white alu	✓	✓

© Shiver NV

We reserve the right, without notice, to change technical details if these, in our opinion do not change appearance or function of the product.