


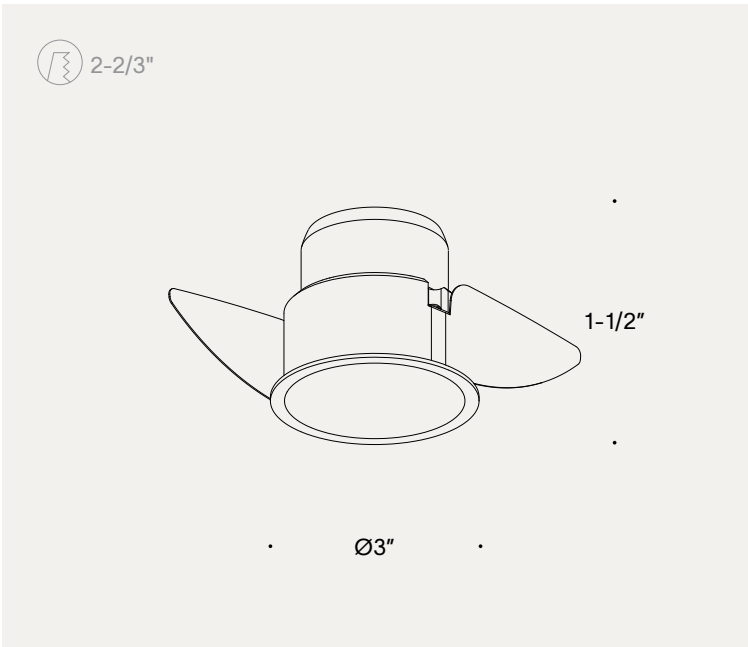

installation

trim spot short

light specs

lamp	LED	
optic	glass lens	
driver	excluded	
suitable for	damp locations	
CRI	90+	97
SDCM	SDCM2	
class	class 2	
drill hole size	2-2/3" (68mm)	
recess height	2-1/2"	
location	indoor	
marking	UL (E543420)	
	Title 24 JA8 Compliant	

accessories

IC boxes	product code
IC box + plaster frame 3-1/2" high	9000-0101
IC box + plaster frame 2-1/4" high (driver remote)	9000-0103
bar hanger kit	9000-0102



trim spot short

luminaire output

	2700K				3000K			
	10°	20°	40°	60°	10°	20°	40°	60°
350mA (5.7W)	-	-	585lm	585lm	-	-	645lm	645lm
500mA (8.5W)	-	-	730lm	730lm	-	-	805lm	805lm

accessories

drivers (for remote installation or in IC box 3-1/2" high)	product code
SOLOdrive 0-10V 350mA 22W (1-2fx)	9000-1008
SOLOdrive 0-10V 500mA 22W (1-2fx)	9000-1002
SOLOdrive DALI 350mA 22W (1-2fx)	9000-1006
SOLOdrive DALI 500mA 22W (1-2fx)	9000-1001
Hatch phase dimming drive constant current 350mA - 12W (1fx)	9000-1003
Hatch phase dimming drive constant current 500mA - 12W (1fx)	9000-1004
drivers (for remote installation only)	
Hatch phase dimming drive constant current 350mA - 30W (2-3fx)	9000-1010
Hatch phase dimming drive constant current 500mA - 30W (2-3fx)	9000-1011