
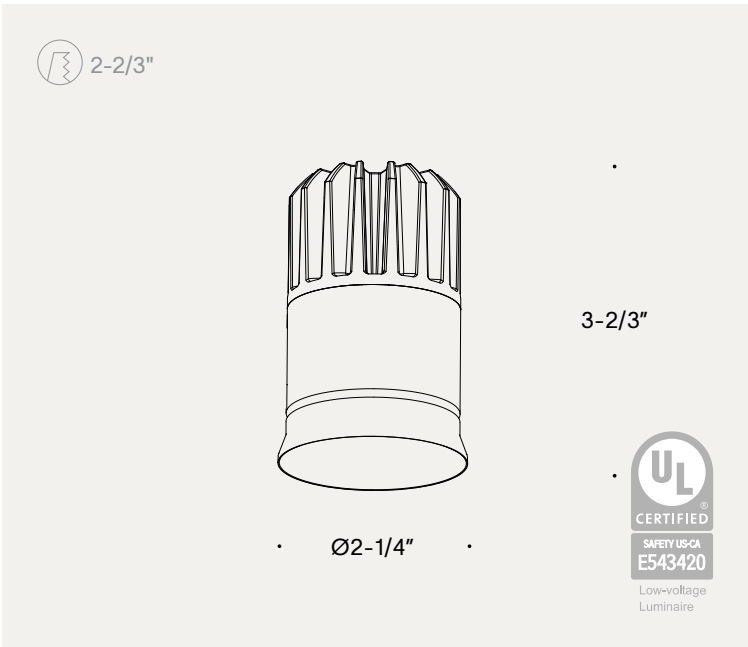


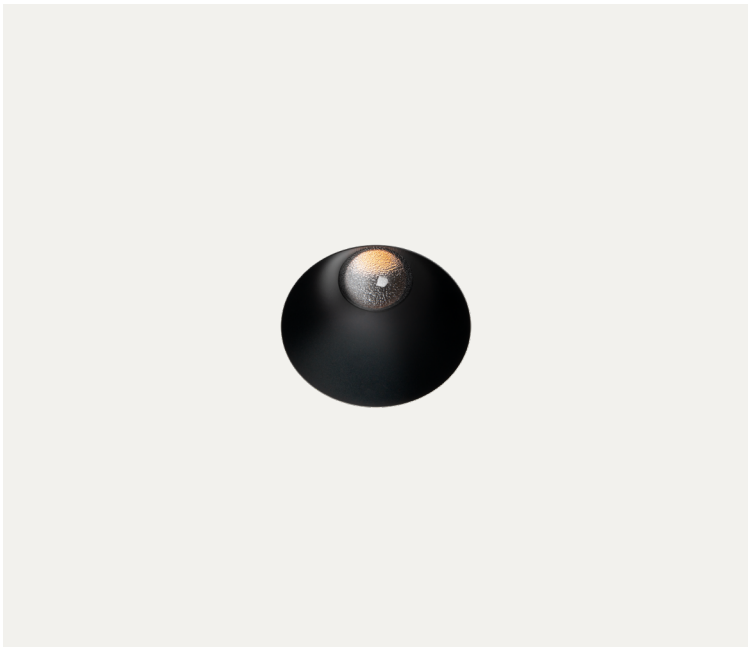

trimless spot long

- ○ ● ● ● ●

installation

light specs

lamp	LED	
optic	glass lens	
driver	excluded	
suitable for	damp locations	
CRI	90+	97
SDCM	SDCM2	
class	class 2	
recess height	3-5/8"	
location	indoor	
marking	UL (E543420)	

accessories

installation	product code
mud ring 2-1/4"	9001-0003
mud ring adj. 2-1/4"	9001-0123
clt csc ring 2-1/4"	9001-0013
concrete ring + cap 2-1/4"	9001-0113

IC boxes	
IC box + plaster frame 3-1/2" high	9000-0101
bar hanger kit	9000-0102

trimless spot long

luminaire output

	2700K				3000K			
	10°	20°	40°	60°	10°	20°	40°	60°
350mA (5.7W)	290lm	420lm	585lm	585lm	325lm	460lm	645lm	645lm
500mA (8.5W)	450lm	555lm	730lm	730lm	495lm	610lm	805lm	805lm
700mA (12.8W)	505lm	720lm	955lm	955lm	560lm	795lm	1055lm	1055lm

accessories

drivers (for remote installation or in IC box 3-1/2" high)	product code
SOLOdrive 0-10V 350mA 22W (1-2fx)	9000-1008
SOLOdrive 0-10V 500mA 22W (1-2fx)	9000-1002
SOLOdrive 0-10V 700mA 22W (1-2fx)	9000-1009
SOLOdrive DALI 350mA 22W (1-2fx)	9000-1006
SOLOdrive DALI 500mA 22W (1-2fx)	9000-1001
SOLOdrive DALI 700mA 22W (1-2fx)	9000-1007
Hatch phase dimming drive constant current 350mA - 12W (1fx)	9000-1003
Hatch phase dimming drive constant current 500mA - 12W (1fx)	9000-1004
Hatch phase dimming drive constant current 700mA - 14W (1fx)	9000-1005
drivers (for remote installation only)	
Hatch phase dimming drive constant current 350mA - 30W (2-3fx)	9000-1010
Hatch phase dimming drive constant current 500mA - 30W (2-3fx)	9000-1011
Hatch phase dimming drive constant current 700mA - 30W (1-2fx)	9000-1012