
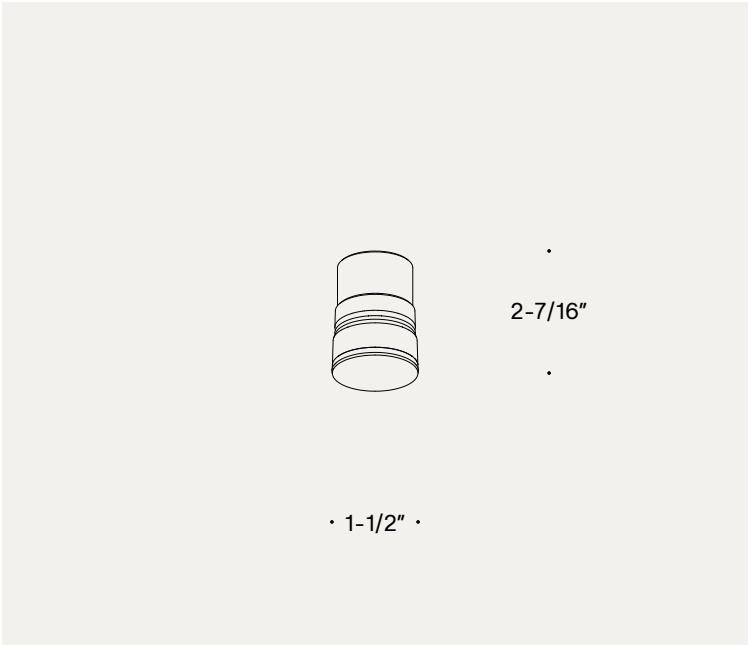


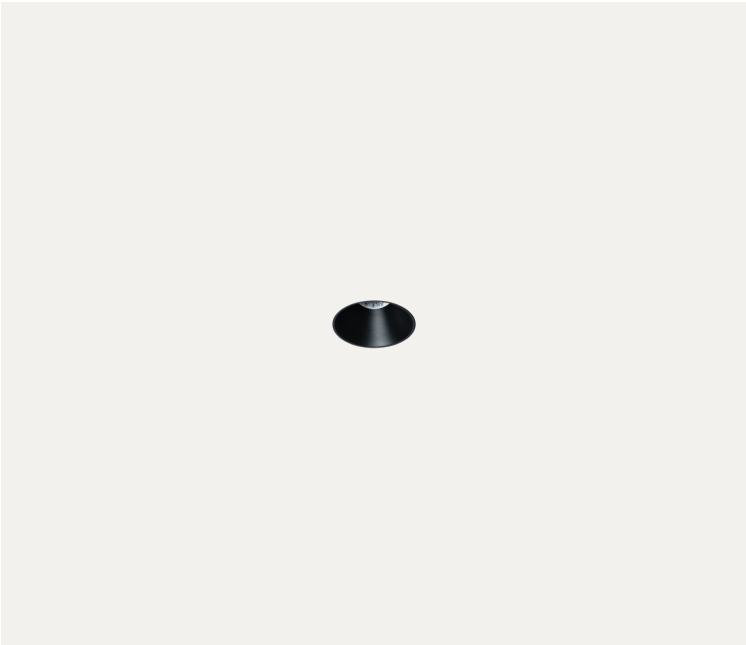

installation

trimless spot mini short

light specs

lamp	LED
optic	lens
driver	excluded
suitable for	damp locations
CRI	90+97
SDCM	SDCM2
class	class 2
recess height	2-7/16"
location	indoor
marking	UL (E543420)
	Title 24 JA8 Compliant

accessories

installation rings	product code
mud ring 1-1/2"	9001-0004
mud ring adj. 1-1/2"	9001-0124
clt csc ring 1-1/2"	9001-0014
housing	
IC box + plaster frame 3-1/2" high airtight	9000-0107
IC box + plaster frame 3-1/2" high non-airtight	9000-0101
IC box + plaster frame 2-1/4" high airtight driver remote	9000-0108
IC box + plaster frame 2-1/4" high non-airtight driver remote	9000-0103
non-IC plaster frame	9000-0106
remodeling box 2.37×1.5×8	9000-0104
bar hanger kit	9000-0102



trimless spot mini short

luminaire output

	2700K				3000K			
	10°	20°	40°	60°	10°	20°	40°	60°
350mA (5.7W)	425lm	525lm	525lm	525lm	450lm	550lm	550lm	550lm
500mA (8.5W)	-	710lm	710lm	710lm	-	750lm	750lm	750lm

accessories

drivers (for remote installation or in IC box 3-1/2" high)	product code
SOLOdrive 0-10V 350mA 22W (1-2fx)	9000-1008
SOLOdrive 0-10V 500mA 22W (1-2fx)	9000-1002
SOLOdrive DALI 350mA 22W (1-2fx)	9000-1006
SOLOdrive DALI 500mA 22W (1-2fx)	9000-1001
Hatch phase dimming driver constant current 350mA - 12W (1fx)	9000-1003
Hatch phase dimming driver constant current 500mA - 12W (1fx)	9000-1004
drivers (for remote installation only)	
Hatch phase dimming driver constant current 350mA - 30W (2-3fx)	9000-1010
Hatch phase dimming driver constant current 500mA - 30W (2-3fx)	9000-1011
Hatch phase dimming driver constant current 350mA - 22W (2-3fx)	9000-1026
DALI / 0-10V dimmable driver 60W constant current multi power (2-4fx)	9000-1014