


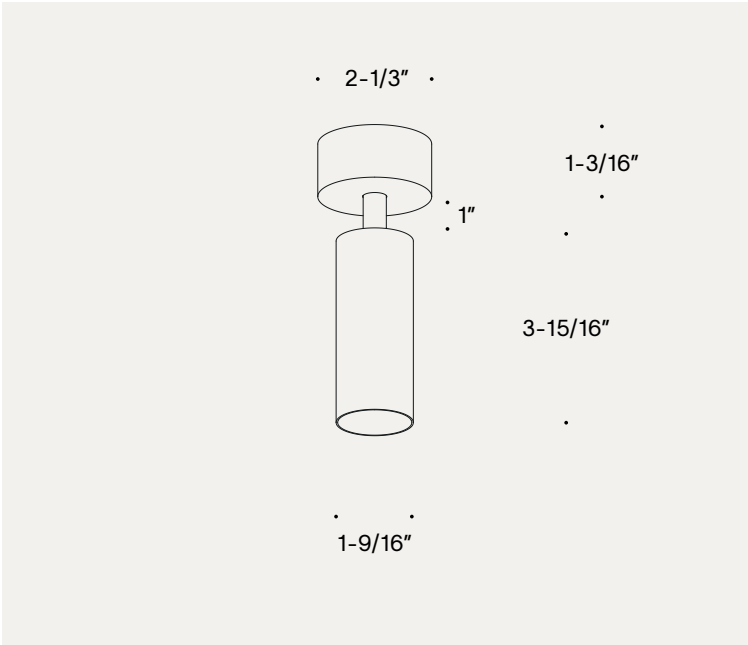

installation

acrobat surface mini long

light specs

lamp	LED	
optic	lens	
driver	excluded	
suitable for	dry locations	
CRI	90+	97
SDCM	SDCM2	
class	class 2	
location	indoor	
marking	UL (E543420)	
	Title 24 JA8 Compliant	



acrobat surface mini long

luminaire output

	2700K				3000K			
	10°	20°	40°	60°	10°	20°	40°	60°
350mA (5.7W)	425lm	525lm	525lm	525lm	450lm	550lm	550lm	550lm
500mA (8.5W)	-	710lm	710lm	710lm	-	750lm	750lm	750lm
700mA (12.8W)	-	-	950lm	-	-	-	1000lm	-

accessories

drivers (for remote installation only)	product code
SOLOdrive 0-10V 350mA 22W (1-2fx)	9000-1008
SOLOdrive 0-10V 500mA 22W (1-2fx)	9000-1002
SOLOdrive DALI 350mA 22W (1-2fx)	9000-1006
SOLOdrive DALI 500mA 22W (1-2fx)	9000-1001
Hatch phase dimming drive constant current 350mA - 12W (1fx)	9000-1003
Hatch phase dimming drive constant current 500mA - 12W (1fx)	9000-1004
Hatch phase dimming drive constant current 350mA - 30W (2-3fx)	9000-1010
Hatch phase dimming drive constant current 500mA - 30W (2-3fx)	9000-1011