


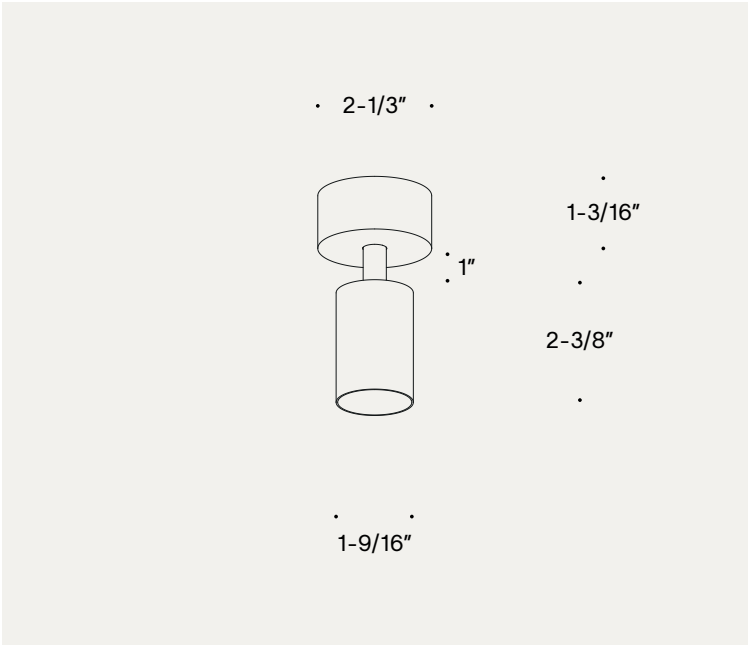

installation

# acrobat surface mini short

## light specs

|              |                        |    |
|--------------|------------------------|----|
| lamp         | LED                    |    |
| optic        | lens                   |    |
| driver       | excluded               |    |
| suitable for | dry locations          |    |
| CRI          | 90+                    | 97 |
| SDCM         | SDCM2                  |    |
| class        | class 2                |    |
| location     | indoor                 |    |
| marking      | UL (E543420)           |    |
|              | Title 24 JA8 Compliant |    |



# acrobat surface mini short

## luminaire output

|              | 2700K |       |       |       | 3000K |       |       |       |
|--------------|-------|-------|-------|-------|-------|-------|-------|-------|
|              | 10°   | 20°   | 40°   | 60°   | 10°   | 20°   | 40°   | 60°   |
| 350mA (5.7W) | 425lm | 525lm | 525lm | 525lm | 450lm | 550lm | 550lm | 550lm |
| 500mA (8.5W) | -     | -     | 710lm | -     | -     | -     | 750lm | -     |

## accessories

| drivers (for remote installation only)                         | product code |
|----------------------------------------------------------------|--------------|
| SOLOdrive 0-10V 350mA 22W (1-2fx)                              | 9000-1008    |
| SOLOdrive DALI 350mA 22W (1-2fx)                               | 9000-1006    |
| Hatch phase dimming drive constant current 350mA - 12W (1fx)   | 9000-1003    |
| Hatch phase dimming drive constant current 350mA - 30W (2-3fx) | 9000-1010    |